


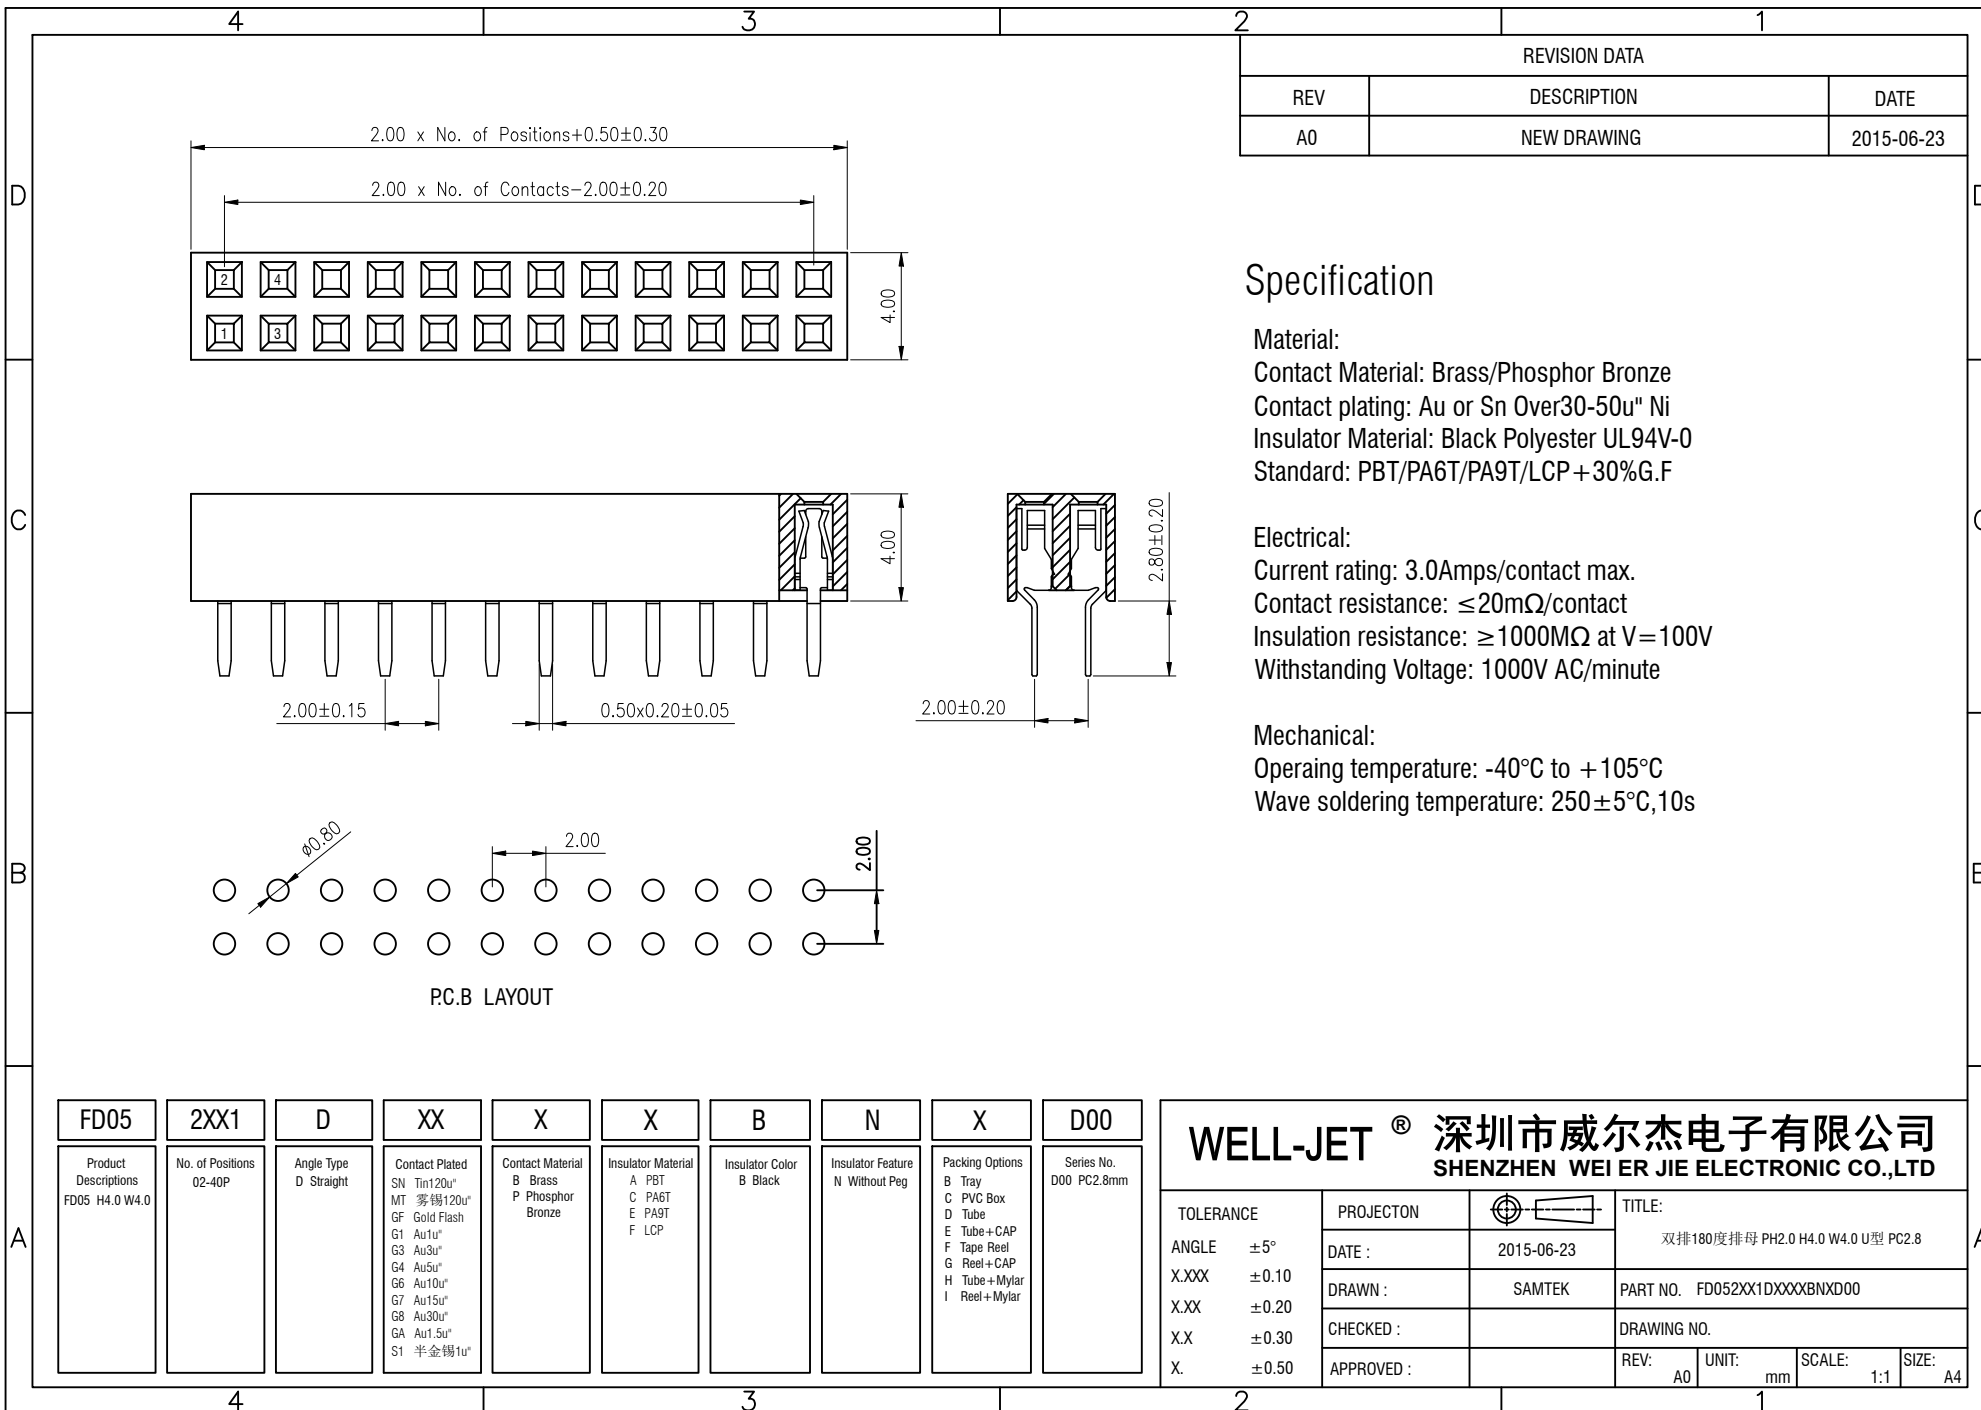

Specification

Material:

Contact Material: Brass/Phosphor Bronze

Contact plating: Au or Sn Over30-50u" Ni

Insulator Material: Black Polyester UL94V-0

Standard: PBT/PA6T/PA9T/LCP+30%G.F

Electrical:

Current rating: 3.0Amps/contact max.

Contact resistance: ≤20mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V

Withstanding Voltage: 1000V AC/minute

Mechanical:

Operating temperature: -40°C to +105°C

Wave soldering temperature: 250±5°C,10s