
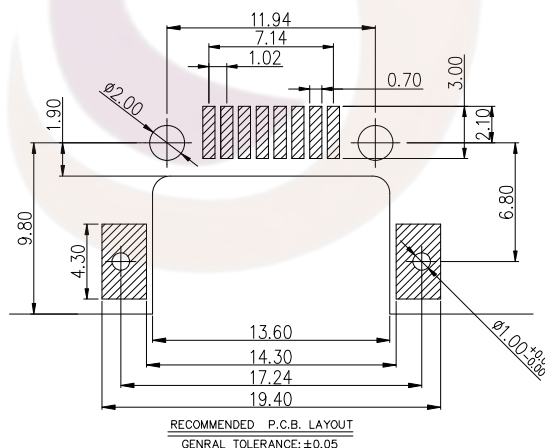
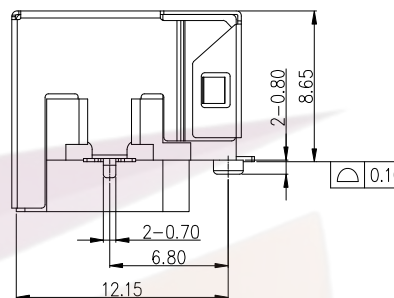
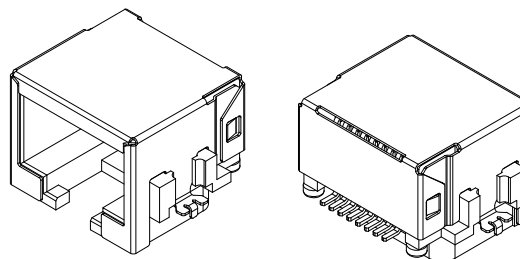
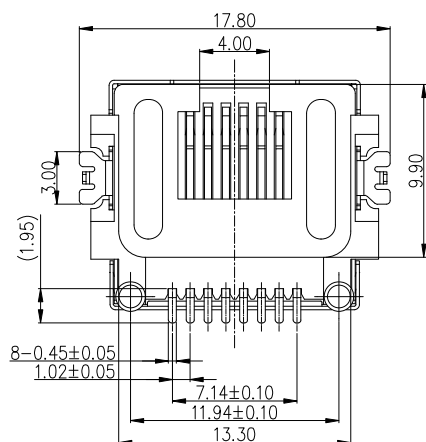
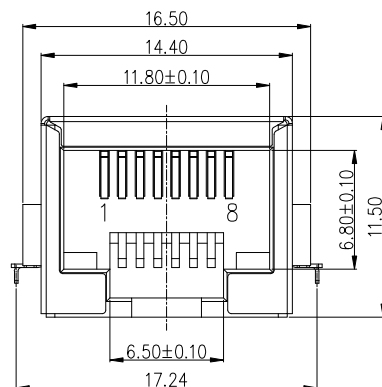


RoHS
Compliant

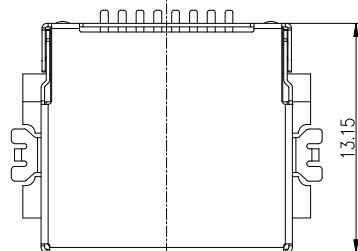

说明:

1. 材质:
胶芯: LCP, UL94V-0; COLOR: BLACK
端子: C5191
外壳: C2680
2. 电镀说明:
端子: 接触区域镀金G.F
焊锡区域镀锡
全部区域镍底
外壳: 表面镀镍
3. 性能说明:
1) 电压: 150V AC RMS.
2) 额定电流: 1.5A.
3) 接触电阻: 40mΩ Max.
4) 绝缘电阻: 500MΩ MIN.
5) 绝缘耐压: 1000V AC.
6) 工作温度: -40° C TO +80° C.
7) 耐久性: 500 Mating Cycles MIN.

PIN	Name	Description
1	TX+	Transceive Data+(发信号+)
2	TX-	Transceive Data-(发信号-)
3	RX+	Receive Data+(收信号+)
4	N/C	Not connected(空脚)
5	N/C	Not connected(空脚)
6	RX-	Receive Data-(收信号-)
7	N/C	Not connected(空脚)
8	N/C	Not connected(空脚)

Guangdong Tengjun Electronic Technology Co., Ltd

Website:

<https://www.tengjunconn.com>

TEL:

0769-23323869



PART NAME

RJ45沉板8.6全包 SMT

PART NO.

TJDRJ2S-N1L1-01

TOLERANCE UNLESS
OTHERWISE SPECIFIED:

X ±0.2
X.X ±0.15
X.XX ±0.10
X.XXX ±0.050

DRAWING:

Li

DATE:

2019.11.12

SCALE

SHEET

REV A0

CHECK:

Chen

DATE:

2019.11.12

1:1

1/2

SIZE: A4

APPROVAL:

Yuan

DATE:

2019.11.12

☐

F	E	D	C	B	A
---	---	---	---	---	---