
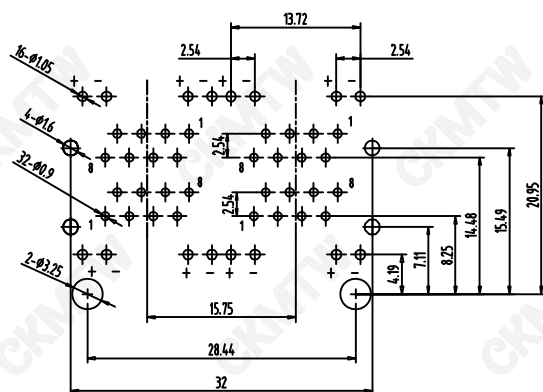



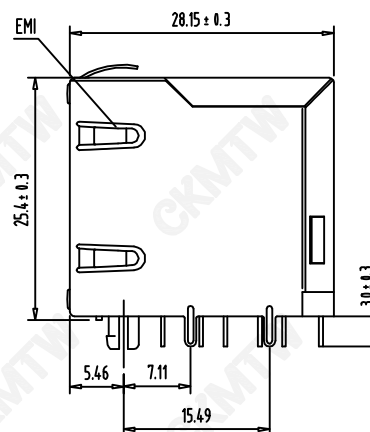

PC Board Layout
Component Side Shown

NOTES:

MATERIAL:

- | | |
|--------------------|-----------------------------------|
| 1.HOUSING MATERIAL | :GLASS FILLED POLYESTER UL94 V-0. |
| 2.CONTACT MATERIAL | :PHOSPHOR BRONZE Ø0.46mm. |
| 3.PLATING | :GOLD PLATING OVER NICKEL. |
| 4.LED | :OPTION |

ELECTRICAL:

- | | |
|--------------------------------------|----------------------------|
| 1.VOLTAGE RATING | :125 VAC RMS. |
| 2.CURRENT RATING | :1.5 AMP. |
| 3.CONTACT RESISTANCE | :30 MILLIOHMS MAX. |
| 4.INSULATION RESISTANCE | :500 MEGOHMS MIN @ 500V DC |
| 5.DIELECTRIC WITHSTANDING RESISTANCE | :1000V AC RMS 50Hz. 1MIN. |

MECHANICAL:

- | | |
|----------------------------|------------------|
| 1.DURRABILITY | :750 CYCLES MIN. |
| 2.PCB RETENTION PRE-SOLDER | :1 LB MIN. |

ENVIRONMENTAL:

1. STORAGE : -40℃~+85℃
2. OPERATION : -25℃~+85℃

TOLERANCE TABLE	
.0	±0.20
.00	±0.10
.000	±0.05

APPROVED:	DATE:	Ckmtw 深圳市灿科盟实业有限公司 CHANKLEMENT INDUSTRYCO., LTD					
CHECKED:	DATE:	TITLE: 网口插座 RJ45-8P/8C 5JC-2*2 弯插 带屏蔽 带灯 带弹 PART. NO. R-RJ45R08P-C404					
DRAWN: L. YUN	DATE: 2020-05-28	UNIT	mm	SCALE	free		
		FILE NO.	Ckmtw-RJ45-0405	REV.	A	HY04	