
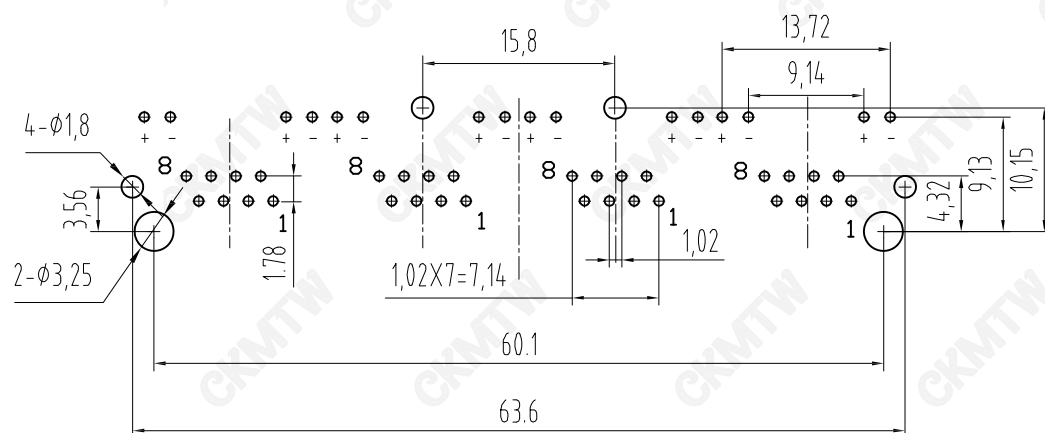
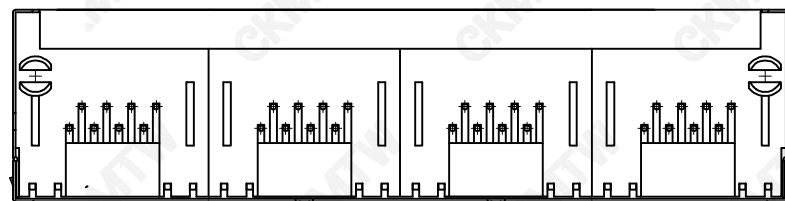


日期

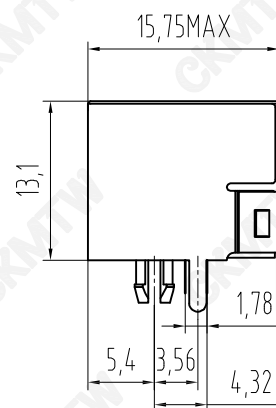

PC Board Layout
Component Side Shown

MATERIAL :

- ELECTRICAL:

- | | |
|---|----------------------------|
| 1.VOLTAGE RATING | :125 VAC RMS. |
| 2.CURRENT RATING | :15 AMP. |
| 3.CONTACT RESISTANCE | :30 MILLIOHMS MAX. |
| 4.INSULATION RESISTANCE | :500 MEGOHMS MIN @ 500V DC |
| 5.DIELECTRIC WITHSTANDING
RESISTANCE | :1000V AC RMS 50Hz. 1MIN. |

MECHANICAL:

- 1.DURRABILITY :750 CYCLES MIN.
2.PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : -40℃~+85℃
2. OPERATION : -25℃ TO +85℃

TOLERANCE TABLE

. 0	± 0.30
. 00	± 0.20
. 000	± 0.05

APPROVED:	DATE:	Ckmtw 深圳市灿科盟实业有限公司 CHANKEMENG INDUSTRYCO., LTD									
CHECKED:	DATE:	TITLE: 网口插座 RJ45-8P/8C 5JA-1*4 四胞胎 弯插 带屏蔽 带灯 无弹									
DRAWN: ZYJ	DATE: 2019-06-21	PART. NO.			R-RJ45R08P-C403						
		UNIT		mm		SCALE		free			
		FILE NO.		Ckmtw-RJ45-0182			REV.		A		HY04