



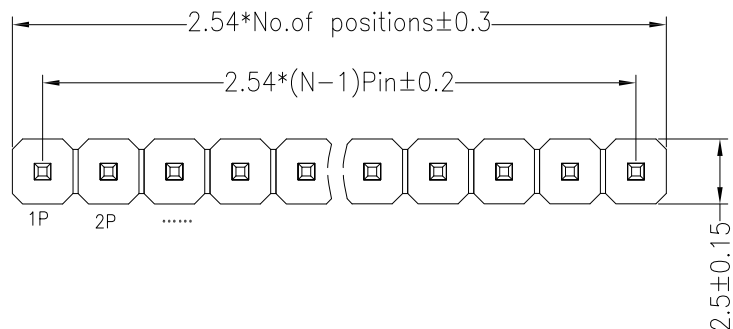

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

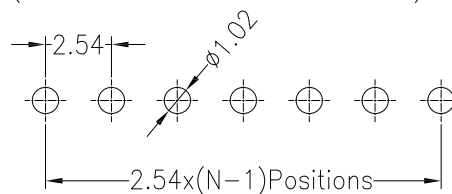

SPECIFICATIONS

Rated Current: 3.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

Contact Material: Brass
Contact Plating: Au Over Ni
Insulator Material: Polyester (UL94V-0)
Standard: PA6T
Max. Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Dimension antitheses list			
ITEM	PA	PC	L
Standard	4.00	2.50	9.00
Alternate			

Ordering Information

PZ 254 - * - N - Z - * - *



No. of Rows
1=Single Row
2=Dual Row

No. of Pins
2-40Pin

Type
Z=直排
N=单排
S=双排
V=垂直

Length
(产品长度)

Contact Plating
G0: Gold Flash
G1: 1u" Gold
G2: 3u" Gold
G3: 5u" Gold
G4: 10u" Gold
G5: 15u" Gold
G6: 30u" Gold
S0: Gold Flash/Tin
S1: Tin

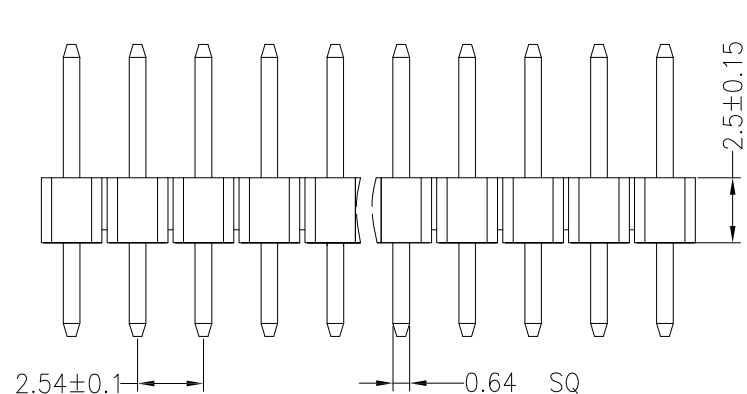

			GENERAL TOLERANCE		制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM	TOL	审 核 CHECK					
			X. X	± 0.30	批 准 APPROVAL		产品名称 TITLE	2.54单排 直排针(塑高2.5)	版 本 REV.	A
			X. XX	± 0.20	比 例 SCALE		产品料号 PART NO.	PZ254-1-N-Z-2.5-XX(PA. 0-PC. 5)	单 位 UNITS	mm
			X. XXX	± 0.10	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE								