

ECN NO.	DESCRIPTION	DATE
A-0	更新外形及尺寸	2024.11.14

材料Material:

- 外壳材质: PBT,PA46 (UL 94V-0)
Housing Material: PBT,PA46 (UL 94V-0)
- 触点材料: 圆针直径0.46mm磷青铜; 镀镍后镀金
Contact Material: Round Pins-0.46mm Diameter
Phosphor Bronze;
Gold Plating Over Nickel
- 屏蔽壳: 镀镍铜合金, 厚度0.2mm
Shield: 0.20mm Thickness Copper Alloy
With Nickel Plated

电气Electrical

- 额定电压: 125伏
Voltage Rating : 125 V Rms
- 额定电流: 1.5安培
Current Rating: 1.5 AMP
- 接触电阻: 最大30毫欧
Contact Resistance: 30 Milliohms MaX
- 绝缘电阻: 500V下, 绝缘最小500兆欧
Insulation Resistance: 500 megohms min @500V
- 绝缘耐压: 60Hz 1000V下, 1分钟
Dielectric Withstanding
Resistance: 1000V Rms 60Hz. 1Min
- 耐久: 插拔750次以上
Durability: 750 Cycles Min
- 工作温度: -40℃~+85℃
Operation Temperature: -40℃~+85℃

5902 - X X X X X X X





Positions	Contacts	Ports	Shield	septum	Plastic	Gold Plating
8	2, 4, 6 or 8	1-2x1 2-2x2 3-2x3 4-2x4 5-2x5 6-2x6 7-2x7 8-2x8	0-W/O Shield 1- Shield W/ EMI 2- Shield W/O EMI 3- W/ half Shield	0-entirely 1-W/O septum 2-W septum	1-PBT 2-PA46 3-Other	1-G/Fu" 2-1u" 3-3u" 4-6u" 5-15u" 6-Other

A

B

C

D

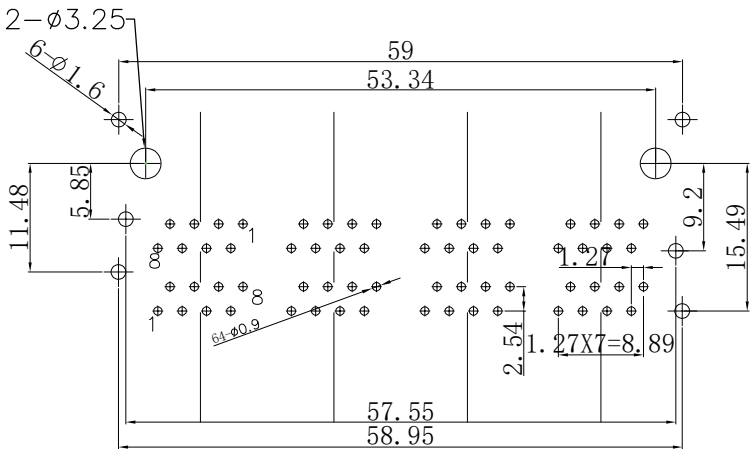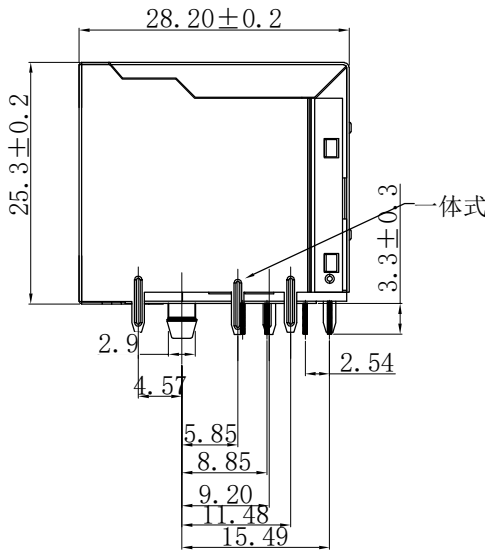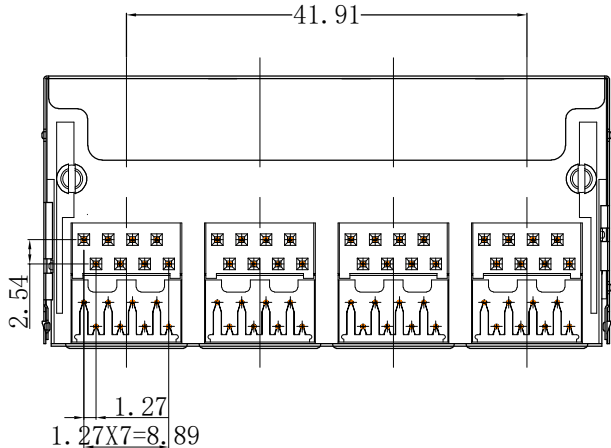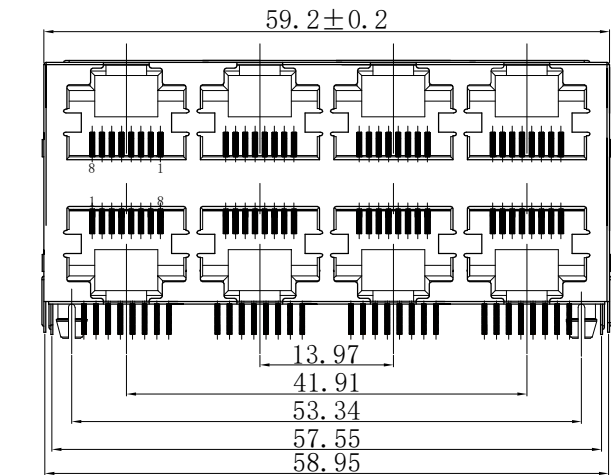

PC Board Layout
Component Side Shown

未注公差	设计	X.C.S	比例	1: 1
尺寸标注	公差	审核	单位	mm
	长度	Z.J.G	图幅	A4
X.	±0.25 ±2.0°	批准	版本	A-0
.X	±0.20 ±1.5°	角法	图数	第1页 共1页
.XX	±0.15 ±1.0°			
.XXX	±0.10 ±0.5°			

恒连电子科技有限公司
EVERCOM ELECTRONIC TECHNOLOGY CO.,LTD
<http://www.chinarj45.com>
产品型号 5902 2×4 8P8C 屏蔽无弹一体式
产品编号 5902-88420XX 图纸编号