



Data Sheet



Shenzhen Deyan Electronics Co., Ltd

Mini Molded Chip Power Inductors

1. Scope

Features

- 1.1 Metal material for large current and low loss.
- 1.2 High performance (Isat) realized by metal dust core.
- 1.3 Low loss realized with low DCR.
- 1.4 Closed magnetic circuit design reduces leakage flux.
- 1.5 Vinyl thermal spray, better surface compactness.
- 1.6 100% lead (Pb) free meet RoHS standard.

Application

- 2.1 DC/DC converters.
- 2.2 Pad, Smart phone.
- 2.3 Portable gaming devices, Smart wear, Wi-Fi module.
- 2.4 Notebooks, VR, AR.
- 2.5 LCD displays, HDDs, DVCs, DSCs, etc.
- 2.6 Baseband power supply, Amplifier, Power management, Module power supply, Camera power management.

2. Ordering Procedure

D 303020 TP - 1R0 MT -G

① ② ③ ④ ⑤ ⑥

① Series Name: Mini Molded Chip Power Inductor

② External Dimensions(L×W×H):3030=3.0*3.0*2.0mm

③ Material: Carbonyl Iron Powder

④ Inductance value: 1R0=1.0uH

⑤ Tolerance: K=±10% M=±20% N=±30%

⑥ Coating color: B=Black

Test remarks

Note 1. : All test data is referenced to 25 °C ambient.

Note 2. : Test Condition: 1MHz, 1.0Vrms.

Note 3. : Irms: DC current (A) that will cause an approximate ΔT of 40 °C.

Note 4. : Isat: DC current (A) that will cause L0 to drop approximately 30%.


Note 5. : Operating Temperature Range -55°C to + 125°C.

Note 6. : The part temperature (ambient + temp rise) should not exceed 125 under °C the worst case operating conditions. Circuit design, component placement, PCB trace size and thickness, airflow and other cooling provision all affect the part temperature. Part temperature should be verified in the end application.


Note 7. : The rated current as listed is either the saturation current or the heating current depending on which value is lower.

Mini Molded Chip Power Inductors

3. SHAPE AND DIMENSIONS

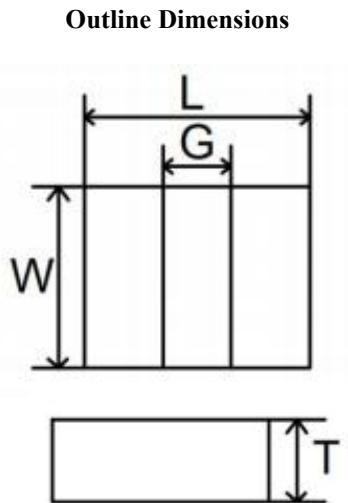

Recommend Land Pattern Dimensions



Units:mm

Series	L	G	W	T	A	B	C
D303020TP	3.0 ± 0.1	1.0 ± 0.2	3.0 ± 0.1	2.0Max.	2.90	0.90	2.90

4. Marking

No Marking


5. Specifications

P/N	L0(μH) @(0A) 1MHz	Rdc(mΩ)		Heat rating current Irms(A)		Saturation current Isat(A)	
		Typical	Max	Typical	Max	Typical	Max
D303020TP-1R0MT-G	1.0	14	20	6.5	6.0	8.0	7.0

6. Current Characteristic




7. Structure

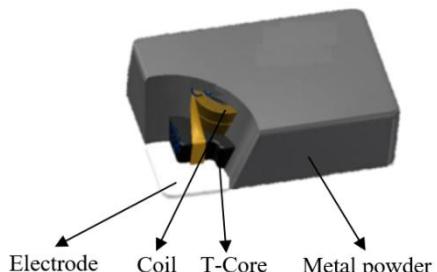

Mini Molded Chip Power Inductors

NO	ITEM	MATERIAL	MANUFACTURER	UL NO.
1	CORE	carbonyl iron powder	江苏天一超细金属粉末有限公司	/
2	WIRE	Copper line	佳腾电业(赣州)有限公司	E318511
3	Coating	Resin	明新软磁科技(江苏)有限公司	/
4	SOLDER	Cu: 5±2um Ni: 5±2um Sn: 10±5um	昆山福莱泰电子有限公司	/
5	Packing materials	GPPS	昆山宇昕和电子科技有限公司	/

7.1 Core Loss

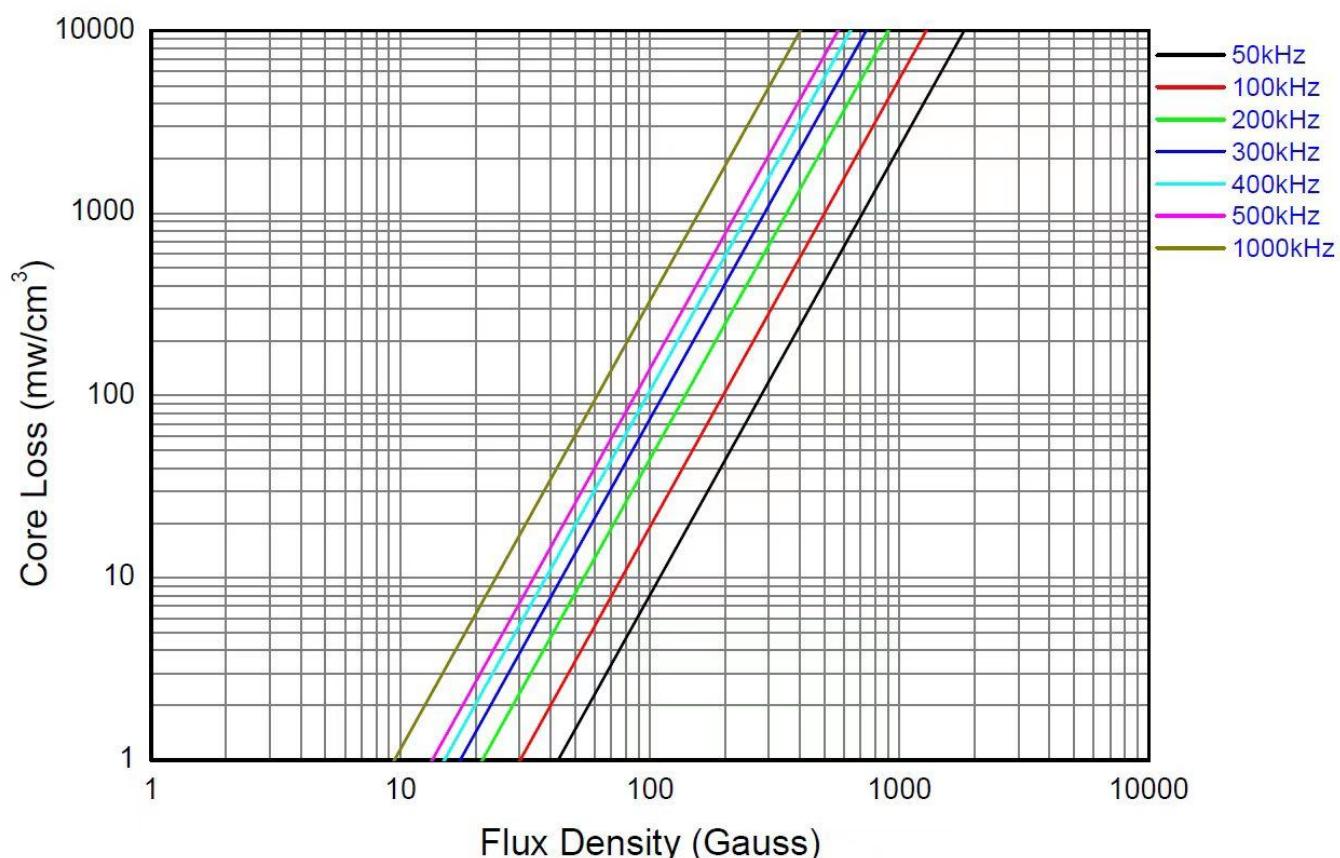

Mini Molded Chip Power Inductors

8. Reliability


Item	Requirements	Test Methods and Remarks
Insulation Resistance	$\geq 100M\Omega$	100 VDC between inductor coil and The middle of the top surface of the body for 60 seconds.
Solderability	90% or more of electrode area shall be coated by new solder.	Dip pads in flux . Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free). Solder Temperature: $245 \pm 5^\circ\text{C}$. Immersion Time: (5 ± 1) s.
Resistance to Soldering Heat	No visible mechanical damage. Inductance change: Within $\pm 10\%$.	Dip pads in flux. Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free). Solder Temperature: $260 \pm 5^\circ\text{C}$. Immersion Time: 10 ± 1 sec.
Adhesion of teral electrode	Strong bond between the pad and the core, without come off PCB.	Inductors shall be subjected to $(260 \pm 5)^\circ\text{C}$ for (20 ± 5) s Soldering in the base with 0.3mm solder. And then aplombelectrode way plus tax 10 N for (10 ± 1) seconds.
High temperature	No case deformation or change in appearance. Inductance change: Within $\pm 10\%$	Temperature: $125 \pm 2^\circ\text{C}$. Time : 1000 hours. Measurement at 24 ± 4 hours after test conclusion.
Low temperature	No visible mechanical damage. Inductance change: Within $\pm 10\%$	Temperature: $-55 \pm 2^\circ\text{C}$. Time : 1000 hours. Measurement at 24 ± 4 hours after test conclusion.
Thermal shock	No visible mechanical damage. Inductance change: Within $\pm 10\%$	The test sample shall be placed at $(-55 \pm 3)^\circ\text{C}$ and $(125 \pm 3)^\circ\text{C}$ for (30 ± 3) , different temperature conversion time is 2~3 utes. The temperature cycle shall be repeated 32 cycles. Placed at room temperature for 2 hours, within 48 ± 4 hours of testing.
Temperature characteristic	Inductance change P_{c-b}, P_{c-d} : Within $\pm 20\%$	a: $+20^\circ\text{C}$ $(30 \sim 45) \rightarrow$ b: -40°C $(30 \sim 45) \rightarrow$ c: $+20^\circ\text{C}$ $(30 \sim 45) \rightarrow$ d: $+125^\circ\text{C}$ $(30 \sim 45) \rightarrow$ e: $+20^\circ\text{C}$ $(30 \sim 45)$ $P_{c-b} = \frac{L_b - L_c}{L_c} \times 100\% \quad P_{c-d} = \frac{L_d - L_c}{L_c} \times 100\%$ $; \quad ;$
Static Humidity	◦ No visible mechanical damage. Inductance change: Within $\pm 10\%$	Inductors shall be subjected to $(95 \pm 3)\%$ RH . $at(60 \pm 2)^\circ\text{C}$ for (1000 ± 4) h . Placed at room temperature for 2 hours, within 48 hours of testing.
Life	No visible mechanical damage. Inductance change: Within $\pm 10\%$	Inductors shall be store at $(85 \pm 2)^\circ\text{C}$ for (1000 ± 4) hours with I_{rms} applied. Placed at room temperature for 2 hours, within 48 hours of testing

Mini Molded Chip Power Inductors

9. Soldering Condition

(This is for recommendation, please customer perform adjustment according to actual application)

Recommend Reflow Soldering Profile : (solder : Sn96.5 / Ag3 / Cu0.5)

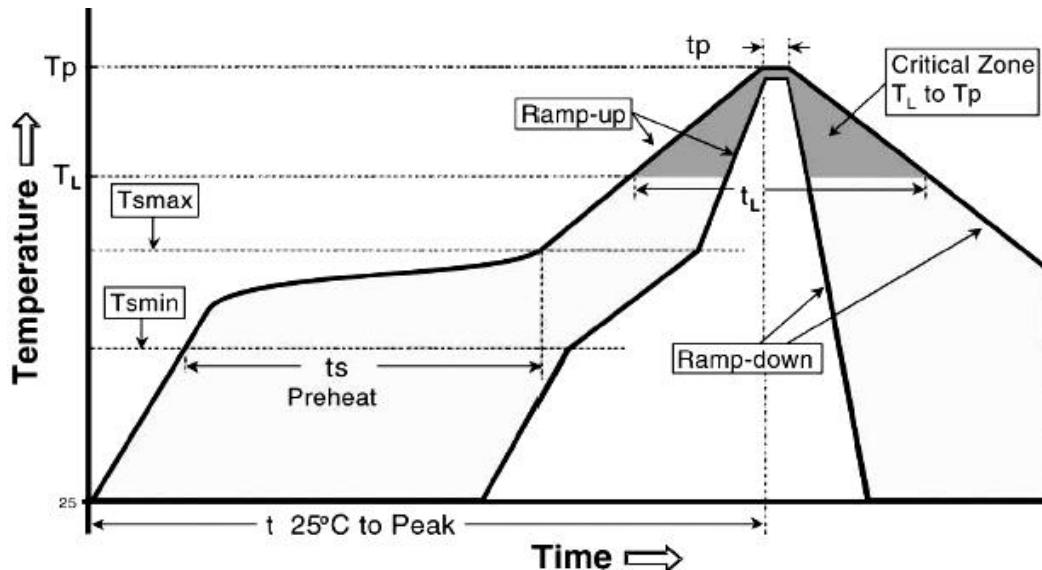


Profile Feature	Lead (Pb)-Free solder
Preheat:	
Temperature Min (T _{smin})	150°C
Temperature Max (T _{smax})	200°C
Time (T _{smin} to T _{smax}) (ts)	60 -120 seconds
Average ramp-up rate:	
(T _{smax} to T _p)	3°C / second max.
Time maintained above :	
Temperature (T _L)	217°C
Time (t _L)	60-150 seconds
Peak Temperature (T _p)	260°C
Time within $\frac{+0}{-5}$ °C of actual peak Temperature (t _p) ²	10 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8minutes max.

Allowed Re-flow times : 2 times

Remark : To avoid discoloration phenomena of chip on terminal electrodes, please use N₂ Re-flow furnace .

10. Packing

10.1 Dimension of plastic taping: (Unit: mm)

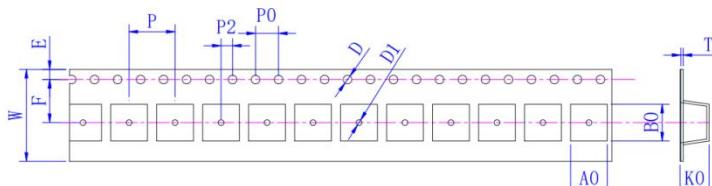


Mini Molded Chip Power Inductors

Series	W ±0.30	A0 ±0.10	B0 +0.1/-0	D +0.1/-0	D1 Min	E ±0.10	F ±0.10	K0 ±0.10	P0 ±0.10	P2 ±0.10	P ±0.10	T ±0.05	Qty/Reel
303020	12.0	3.40	3.40	1.50	1.0	1.75	5.50	2.20	4.00	2.00	8.00	0.35	3KPCs

10.2 Dimension of Reel : (Unit: mm)

Type	A ±2.0	B ±1.0	C ±1.0	D ±0.3
All	330	100	13.5	2.0

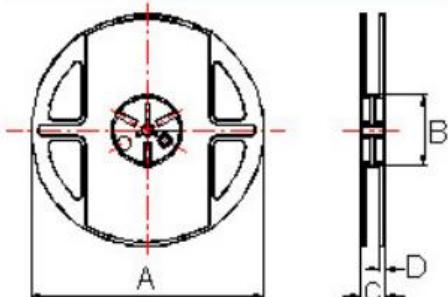

11. Note

11.1 Huacui recommend products store in warehouse with temperature between 15 to 35°C under humidity between 25 to 75%RH.

Even under storage conditions recommended above, solder ability of products will be degraded stored over 1 year old.

11.2 Cartons must be placed in correct direction which indicated on carton, otherwise the reel or wire will be deformed.

11.3 Storage conditions as below are inappropriate:

- Stored in high electrostatic environment
- Stored in direct sunshine, rain, snow or condensation.
- Exposed to sea wind or corrosive gases, such as Cl₂, H₂S, NH₃, SO₂, NO₂, etc.

11.4 The products are used in circuit board thickness greater than 1.6mm. If customers use less than the thickness of the circuit board that you should confirm with the company, in order to recommend a more suitable product.

12. Record

Version	Description	Page	Date	Amended by	Checked by
A0	First version	1~7	May.26.2023	Xirui.Niu	Dirk.Wang

©Shenzhen Deyan Electronics Co., Ltd All rights reserved. Specification herein will be changed at any timewithout prior notice.