

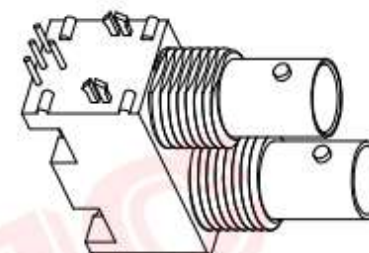


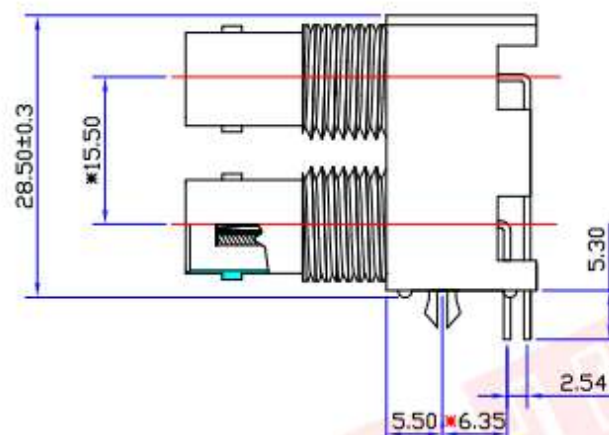


Product NO.		RHT-610-0049		
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. Wang	2016/3/08	John kine
B	Product dimensions are subject to change	Gavin	2022/09/29	John kine


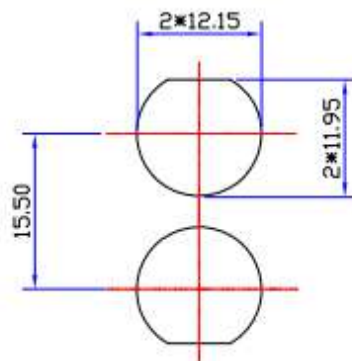


Specification:

Impedance:50 Ohms
VSWR:1.3MAX
Frequency range:DC~4G
Working Voltage:500V rms @ sea level
Insulation resistance:5000 Ohms min
Temperature range:-55℃ TO +155℃
Relative temperature:≤95%(40° C±2° C)



1/4-28UNEF-2A

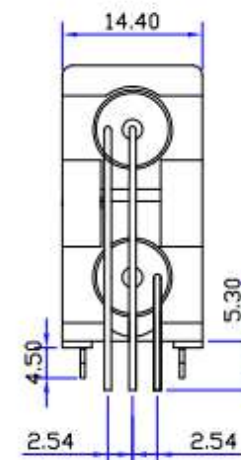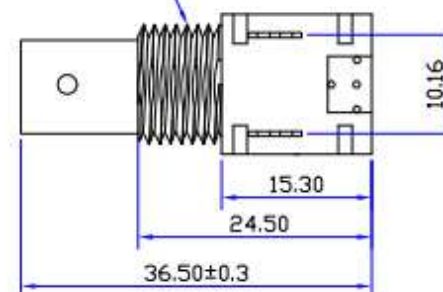

NOTE:


1	Body	Zinc	NI:80-120u"
2	Center contact	Brass	AU:1u"
3	Lead	Iron	AU:1u"
4	Fixed footrest	Iron	NI:80-120u"
5	Insulator	POM	White
6	Fixed mount	ABS	White
7	Washer	Brass	NI:80-120u"
8	Hex nut	Brass	NI:80-120u"
NO	Component Number	Material	Finish

DRAWN	2022/09/29
Gavin	
CHECKED	
APPROVALS	2022/09/29
John Kine	

Tolerance

0-8	±0.20
8-30	±0.25
30-120	±0.30
Angular	±2°

View



UNIT

MM

SCALE

1:1



RENHOTEC GROUP

Name: BNC JACK CONNECTOR

SIZE A Product NO. RHT-610-0049 REV B

DateTime 2022/09/29 CAD FILE D/company drawings/BD SHEET: 1 OF 1