





3D View

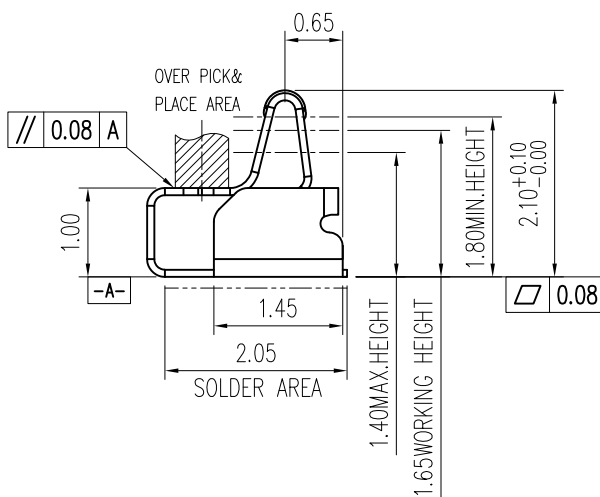


## NOTES


- (1) MATERIAL: SUS-301 THICKNE=0.08mm  
(2) PRODUCT SPECIFICATIONS:  
2-1: RATED CURRENT: 1.0A  
2-2: VOLTAGE RATING: 1.50V  
2-3: CONTACT RESISTANCE: 80mΩ/MAX  
2-4: WELDING THRUST: ≥3KG  
2-5: OPERATING TEMPERATURE: -40°C~+85°C  
2-6: DURABILITY: 1500 CYCLES  
(3): SALT SPRAY: 24 HOURS  
(4): REQUIREMENTS  
4-1: TERMINAL TO EAT FULL TIN, NOT PEELING  
WELDING OBVIOUS COLOR AND OTHER ADVERSE  
4-2: ROHS, REACH, HF HALOGEN ADVERSE OF DOMESTIC  
AND INTERNATIONAL ENVIRONMENTAL REQUIREMENTS

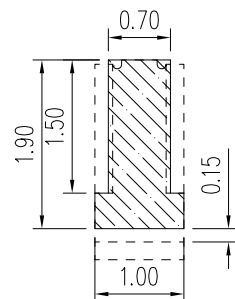

RECOMMENDED PCB LAYOUT  
TOLERANCE: ±0.05 (焊盘推荐图)

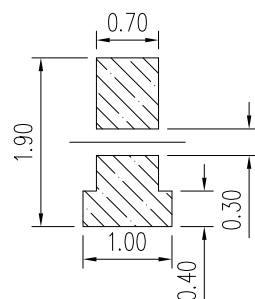

METAL MASK T=0.10  
TOLERANCE: ±0.05 (钢网推荐图)



(For Reference Only)  
Stated At Compression



深圳市华宇创精密电子有限公司

|                                                                            |                    |                      |                                       |
|----------------------------------------------------------------------------|--------------------|----------------------|---------------------------------------|
| TOLERANCE:<br>X.X ±0.30<br>X.XX ±0.25<br>X.XXX ±0.15<br>X.' ±2' X.X' ±0.5' | DRAWN BY :<br>陈一鸣  | DATE :<br>2014-02-23 | PART NAME:<br>天线弹片 L2. 25*W1.00*H2.10 |
|                                                                            | CHECKED BY:<br>马跃  | DATE :<br>2014-02-23 | PART NO.<br>HYCW-TXT2251021A          |
| <br>UNIT: mm [inch]<br>SCALE: 1:1 SIZE: A4                                 | APPROVED BY:<br>邱敏 | DATE :<br>2014-02-23 | DRAW NO:<br>HYC-2412171524            |
|                                                                            |                    |                      | SHEET NO.<br>1 OF 1                   |