


深圳市灿科盟实业有限公司






PCN 申请书		发行编号			
发 行		发行(供方名)	承 办	审 核	批 准
		灿科盟	覃冰		
	2025-11-18	对贵司所购入品或购入品的质量体系希望发生以下的变化,特此联系。请于 2025 年 11 月 30 日前给出答复。			
适 用 购 入 品	品名	U-MICRM05P-BF13			
	客户规格	Micro usb 5P B型 SMT 四脚加长插板 带柱 卷边			
	客户料号	/			
	分类(打勾)	<input type="checkbox"/> 人、 <input type="checkbox"/> 机、 <input checked="" type="checkbox"/> 料、 <input type="checkbox"/> 法、			
变 更 的 内 容 · 理 由	变更内容:	变更前	变更后		
	变更原因:	因该款四脚加长插板的产品,市场需求较少,已经停产,现建议改用常规的产品,四脚为普通长度,如上图所示,此变化会对客户安装,焊板会有一定影响,但对产品的功能无影响。			
	起始变更标志	日期: 2025 年 11 月 18 日	批次:	编号:	
	针对以上联系做出以下回答。				
客户意见	签名:				
最终结果	<input type="checkbox"/> 同意变更。 <input type="checkbox"/> 基本同意, 需生产 ____ PCS, 量试后决定。				
	<input type="checkbox"/> 不同意变更。 <input type="checkbox"/> 其它: _____。				
	承认:	审核:	批准:	年 月 日	

深圳市灿科盟实业有限公司

产品变更前后对照图片（左边为变更前，右边为变更后）

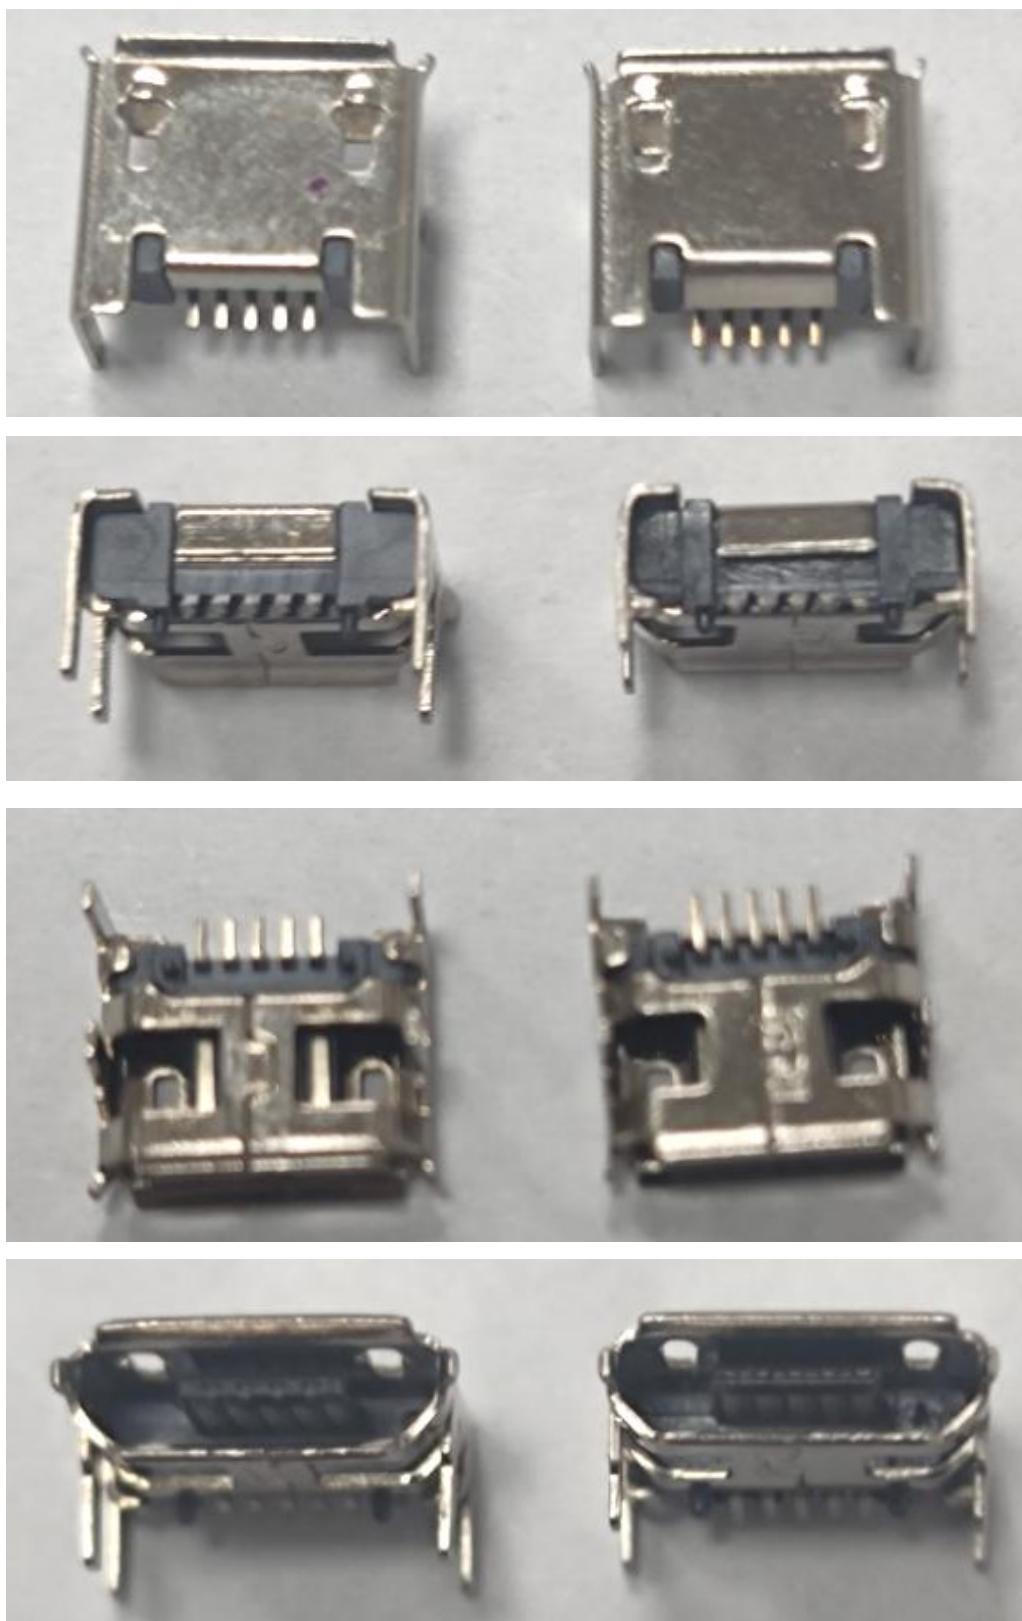

(备注:变更后四个固定引脚会偏短 0.5mm, 客户须评估对焊板是否会有影响)

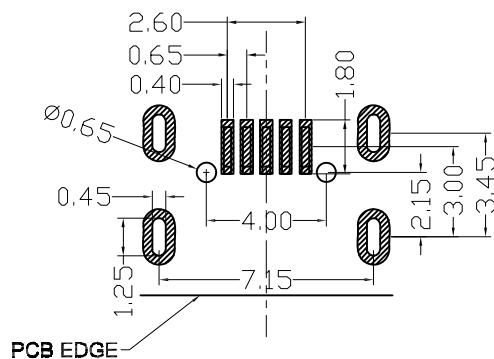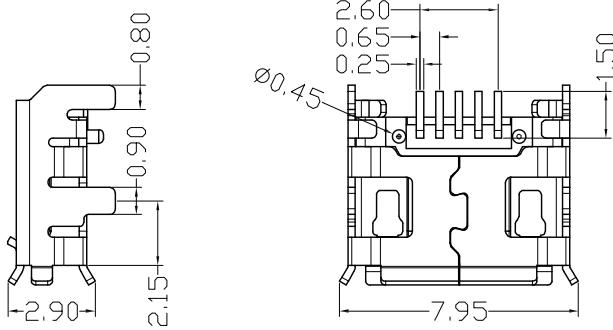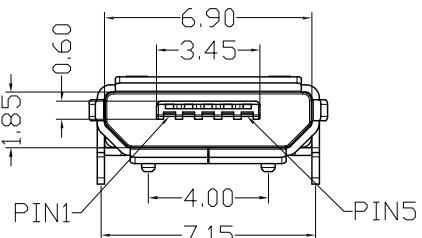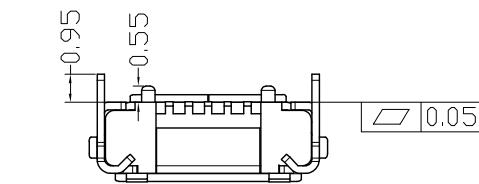

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05

TOLERANCE TABLE	
.0	± 0.30
.00	± 0.20
.000	± 0.05

NOTES:

1. MATERIAL:

1.1 HOUSING:THERMOPLASTIC FLAMMABILITY RATING UL94-0

1.2 CONTACT:COPPERY ALLOY T=0.15MM

1.3 SHELL: COPPERY ALLOY T=0.25MM

2. FINISH:

2.1 CONTACT:

1U"MIN,PLATED ON CONTACT AREA
G/F PLATING ON SOLDER TAIL AREA
50~80U" NICKEL UNDERPLATING OVERALL

2.2 SHELL:

80~120U" MATTER TIN PLAING ALL
50~80U" NICKEL UNDERPLATING OVERALL

3. SPECIFICATION:

3.3 CURRENT RATING:0.5A(2.3.4CONTACT)/1.8A
(1.5CONTACT)MAX.

3.2 VOLTAGE:30 VAC

3.3 TEMPERATURE RANGE:-30°C~85°C

3.4 CONTACT RESISTANCE:30 MILLIONHM MAX.

3.5 DIELECTRIC WITHSTANDING VOLTAGE:250VAC R.M.S

3.6 INSULATION RESISTNACE:100 MEGOHMS MIN

APPROVED:	DATE:	深圳市灿科盟实业有限公司	
CHECKED:	DATE:	TITLE: Micro usb 5P B型 SMT 四脚插板 带柱 卷边	
DRAWN:	DATE:	PART. NO.	U-MICRM05P-BF21
HCY	2025-08-02	UNIT	mm
		SCALE	free
		FILE NO.	Ckmtw-MICRO-0067
		REV.	A
			HK00