




Signal contact

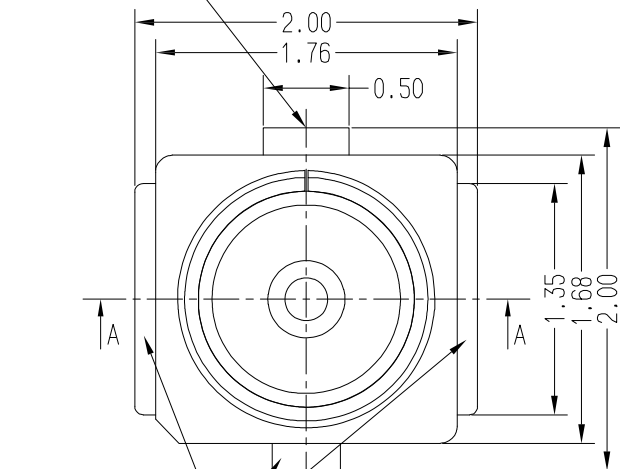

Ground contact

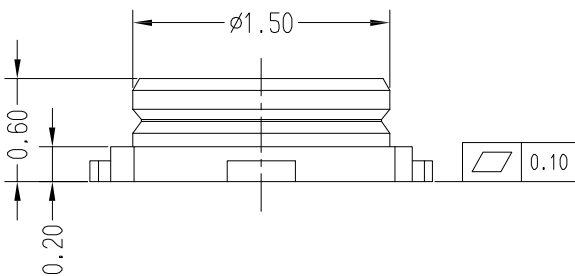


Ground contact

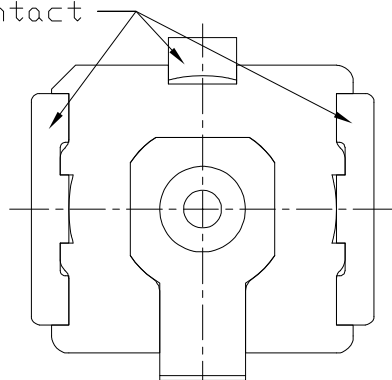


Signal contact

NOTES:


1. FREQUENCY RANGE:
DC TO 6GHZ (VSWR: 1.3MAX AT 0.1~3GHZ, 1.4MAX AT 3~6GHZ)
2. CHARACTERISTIC IMPEDANCE: 50Ω (NOMINAL);
3. TEMPERATURE: -40°C TO $+90^{\circ}\text{C}$;
4. RATED VOLTAGE : 60VAC;
5. CONTACT RESISTANCE :
 $20\text{m}\Omega$ MAX. (SIGNAL CONTACT)
 $20\text{m}\Omega$ MAX. (GROUND CONTACT)
6. WITHSTAND VOLTAGE : 200VAC FO、1 MINUTE MIN;
7. INSULATION RESISTANCE : $500\text{M}\Omega$ MIN. AT 100VDC;
8. THIS COMPONENT IS HALOGEN FREE.

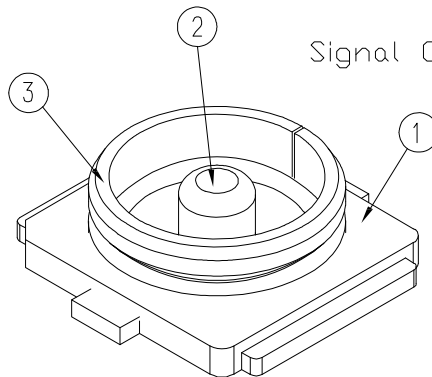

Signal Contact

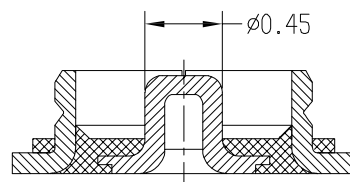

SECTION: A-A

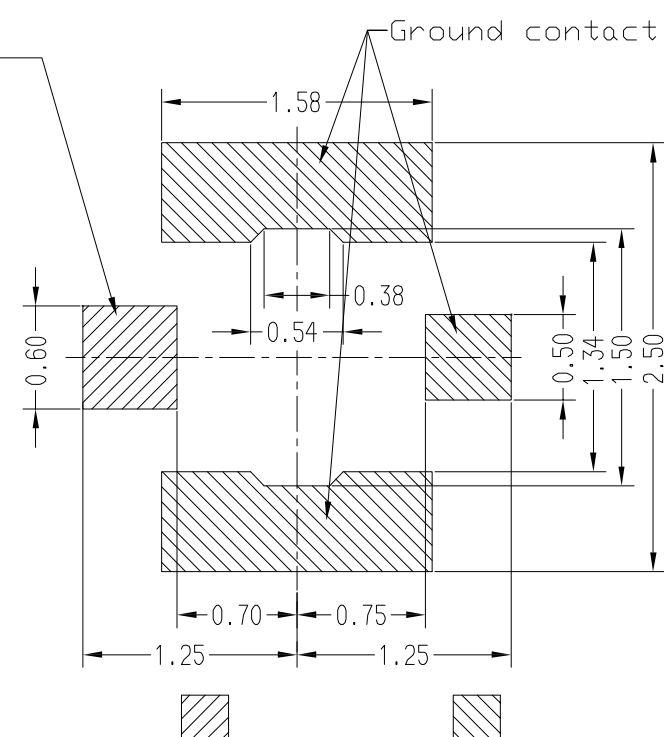

Ground contact

SIGNAL CONTACT GROUND CONTACT

P.C.B DIMENSION (TOP VIEW)
(TOLERRANCE ± 0.05)

LT-IPEX4

3	SHELL	1	COPPER ALLOY	Ni: 50u"~100u"/ Gold Flash.	
2	CONTACT	1	COPPER ALLOY	Ni: 50u"~100u"/ Gold Flash.	
1	HOUSING	1	LCP(BLACK)	UL94V-0	
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARK

Qeloto

www.qeloto.com

RF BOARD END CONNECTOR, FORTH GENERATION
I TYPEDWG NO.:
113-0000-007PART NO. (料号):
ZP000184RFB

.X± 0.25 .X± 5'

APPD: Max 11/2'12

CUSTOMER
DRAWING

.XX± 0.25 .XX± 3'

CHKD: Max 11/2'12

.XXX± .XXX± 1'

DR: Andy 11/2'12

UNITS SCALE SHEET REV.
mm 1:1 1/1 A