

Working Peak Reverse Voltage: 5.0 to 440 Volts
Power Dissipation: 400Watts
RoHS Device
Halogen Free




Features


- 400W peak pulse power capability with a 10/1000us waveform, repetitive rate (duty cycle):0.01%
- For surface mounted applications to optimize board space
- Low incremental surge impedance
- Excellent clamping capability
- Very fast response time
- Uni and Bidirectional unit
- Plastic package has underwriters laboratory flammability 94V-0
- Meet Halogen free and RoHS compliant
- IEC 61000-4-2(ESD) $\pm 30\text{KV}$ (Air); $\pm 30\text{KV}$ (Contact)

Mechanical data

- Case: SMA/DO-214AC, molded plastic.
- Terminals: solderable per MIL-STD-750, method 2026.
- Polarity: Color band denotes positive end (cathode) bi-directional models

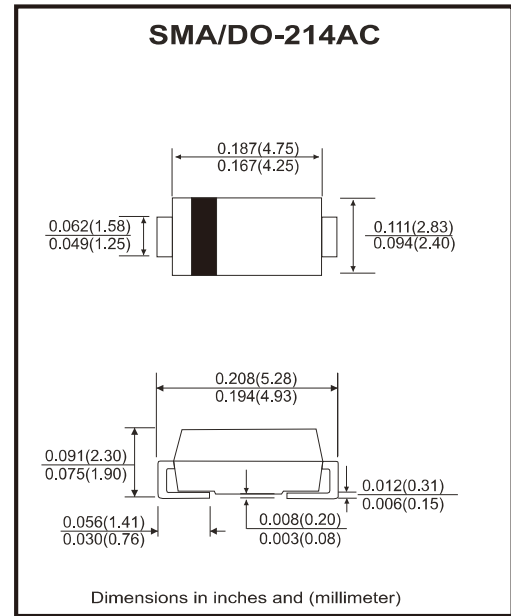

Circuit Diagram

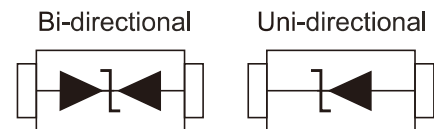

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz resistive or inductive load. For capacitive load, derate current by 20%.

Characteristics	Symbol	Value	Units
Peak power dissipation on a 10/1000μs waveform (Note 1)	P_{PP}	400	W
Peak pulse current on a 10/1000μs waveform (Note 1)	I_{PP}	See Next Table	A
Steady state power dissipation at $T_L=50^\circ\text{C}$	P_D	3.3	W
Peak forward surge current, 8.3ms single half sine-wave uni-directional only (Note 2)	I_{FSM}	40	A
Maximum instantaneous forward voltage at 25 A for uni-directional only	V_F	3.5/5.0	V
Operation junction and storage temperature range	T_J, T_{STG}	-55 to +150	°C

Notes: 1. Non-repetitive current pulse, and derated above $T_A=25^\circ\text{C}$
2. Mounted on 0.2 x 0.2" (5.0 x 5.0 mm) copper pads to each terminal
3. $V_F < 3.5\text{V}$ for devices of $V_{BR} < 200\text{V}$ and $V_F < 5.0\text{V}$ for devices of $V_{BR} > 201\text{V}$

Electrical Characteristics (at TA=25°C, unless otherwise specified)

Part No.	Breakdown voltage VBR @ IT			Maximum Reverse Leakage @VRWM IR (μA)	Working Peak Reverse Voltage VRWM (V)	Maximum Reverse Surge Current IPP (A)	Maximum Clamping Voltage @IPP VC (V)	Marking Code	
	Min. (V)	Max. (V)	IT (mA)					UNI	BI
SMAJ5.0(C)A	6.40	7.25	10	800	5.0	43.5	9.2	AE	WE
SMAJ6.0(C)A	6.67	7.37	10	800	6.0	38.8	10.3	AG	WG
SMAJ6.5(C)A	7.22	7.98	10	500	6.5	35.7	11.2	AK	WK
SMAJ7.0(C)A	7.78	8.60	10	200	7.0	33.3	12.0	AM	WM
SMAJ7.5(C)A	8.33	9.21	1	100	7.5	31.0	12.9	AP	WP
SMAJ8.0(C)A	8.89	9.83	1	50	8.0	29.4	13.6	AR	WR
SMAJ8.5(C)A	9.44	10.40	1	10	8.5	27.8	14.4	AT	WT
SMAJ9.0(C)A	10.00	11.10	1	5	9.0	26.0	15.4	AV	WV
SMAJ10(C)A	11.10	12.30	1	5	10.0	23.5	17.0	AX	WX
SMAJ11(C)A	12.20	13.50	1	5	11.0	22.0	18.2	AZ	WZ
SMAJ12(C)A	13.30	14.70	1	5	12.0	20.1	19.9	BE	XE
SMAJ13(C)A	14.40	15.90	1	5	13.0	18.6	21.5	BG	XG
SMAJ14(C)A	15.60	17.20	1	5	14.0	17.2	23.2	BK	XK
SMAJ15(C)A	16.70	18.50	1	5	15.0	16.4	24.4	BM	XM
SMAJ16(C)A	17.80	19.70	1	5	16.0	15.4	26.0	BP	XP
SMAJ17(C)A	18.90	20.90	1	5	17.0	14.5	27.6	BR	XR
SMAJ18(C)A	20.00	22.10	1	5	18.0	13.7	29.2	BT	XT
SMAJ20(C)A	22.20	24.50	1	5	20.0	12.3	32.4	BV	XV
SMAJ22(C)A	24.40	26.90	1	5	22.0	11.3	35.5	BX	XX
SMAJ24(C)A	26.70	29.50	1	5	24.0	10.3	38.9	BZ	XZ
SMAJ26(C)A	28.90	31.90	1	5	26.0	9.5	42.1	CE	YE
SMAJ28(C)A	31.10	34.40	1	5	28.0	8.8	45.4	CG	YG
SMAJ30(C)A	33.30	36.80	1	5	30.0	8.3	48.4	CK	YK
SMAJ33(C)A	36.70	40.60	1	5	33.0	7.5	53.3	CM	YM
SMAJ36(C)A	40.00	44.20	1	5	36.0	6.9	58.1	CP	YP
SMAJ40(C)A	44.40	49.10	1	5	40.0	6.2	64.5	CR	YR
SMAJ43(C)A	47.80	52.80	1	5	43.0	5.8	69.4	CT	YT
SMAJ45(C)A	50.00	55.30	1	5	45.0	5.5	72.7	CV	YV
SMAJ48(C)A	53.30	58.90	1	5	48.0	5.2	77.4	CX	YX
SMAJ51(C)A	56.70	62.70	1	5	51.0	4.9	82.4	CZ	YZ
SMAJ54(C)A	60.00	66.30	1	5	54.0	4.6	87.1	RE	ZE
SMAJ58(C)A	64.40	71.20	1	5	58.0	4.3	93.6	RG	ZG
SMAJ60(C)A	66.70	73.70	1	5	60.0	4.1	96.8	RK	ZK
SMAJ64(C)A	71.10	78.60	1	5	64.0	3.9	103.0	RM	ZM
SMAJ70(C)A	77.80	86.00	1	5	70.0	3.5	113.0	RP	ZP
SMAJ75(C)A	83.30	92.10	1	5	75.0	3.3	121.0	RR	ZR
SMAJ78(C)A	86.70	95.80	1	5	78.0	3.2	126.0	RT	ZT
SMAJ85(C)A	94.40	104.00	1	5	85.0	2.9	137.0	RV	ZV
SMAJ90(C)A	100.00	111.00	1	5	90.0	2.7	146.0	RX	ZX
SMAJ100(C)A	111.00	123.00	1	5	100.0	2.4	162.0	RZ	ZZ

Electrical Characteristics (at TA=25°C, unless otherwise specified)

Part No.	Breakdown voltage V _{BR} @ I _T			Maximum Reverse Leakage @V _{RWM} I _R (μA)	Working Peak Reverse Voltage V _{RWM} (V)	Maximum Reverse Surge Current I _{PP} (A)	Maximum Clamping Voltage @I _{PP} V _C (V)	Marking Code	
	Min. (V)	Max. (V)	I _T (mA)					UNI	BI
SMAJ110(C)A	122.0	135.0	1	5	110.0	2.2	177.0	SE	VE
SMAJ120(C)A	133.0	147.0	1	5	120.0	2.1	193.0	SG	VG
SMAJ130(C)A	144.0	159.0	1	5	130.0	1.9	209.0	SK	VK
SMAJ150(C)A	167.0	185.0	1	5	150.0	1.6	243.0	SM	VM
SMAJ160(C)A	178.0	197.0	1	5	160.0	1.5	259.0	SP	VP
SMAJ170(C)A	189.0	209.0	1	5	170.0	1.4	275.0	SR	VR
SMAJ180(C)A	200.0	220.0	1	5	180.0	1.3	291.6	ST	VT
SMAJ200(C)A	224.0	247.0	1	1	200.0	1.2	324.0	SV	VV
SMAJ220(C)A	246.0	272.0	1	1	220.0	1.1	356.0	SX	VX
SMAJ250(C)A	279.0	309.0	1	1	250.0	1.0	405.0	SZ	VZ
SMAJ300(C)A	335.0	371.0	1	1	300.0	0.8	486.0	TE	UE
SMAJ350(C)A	391.0	432.0	1	1	350.0	0.7	567.0	TG	UG
SMAJ400(C)A	447.0	494.0	1	1	400.0	0.6	648.0	TK	UK
SMAJ440(C)A	492.0	543.0	1	1	440.0	0.6	713.0	TM	UM

Rating and Characteristic Curves (SMAJ5.0(C)A THRU SMAJ440(C)A)

Fig.1 - Pulse Derating Curve

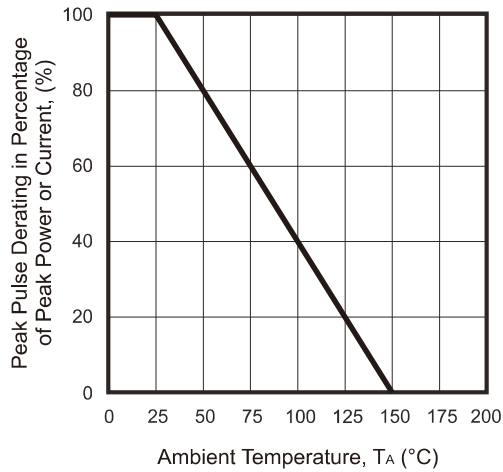


Fig.2 - Maximum Non-Repetitive Surge Current

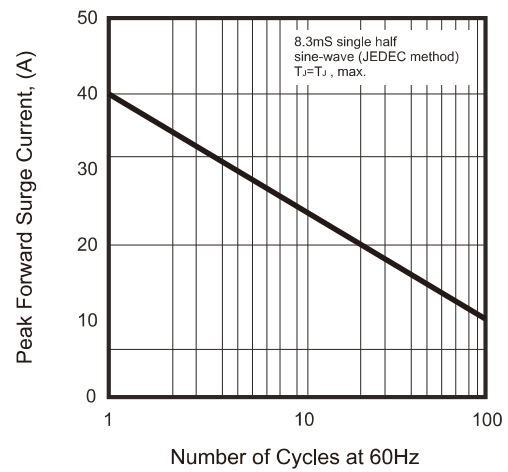


Fig.3 - Steady State Power Derating Curve

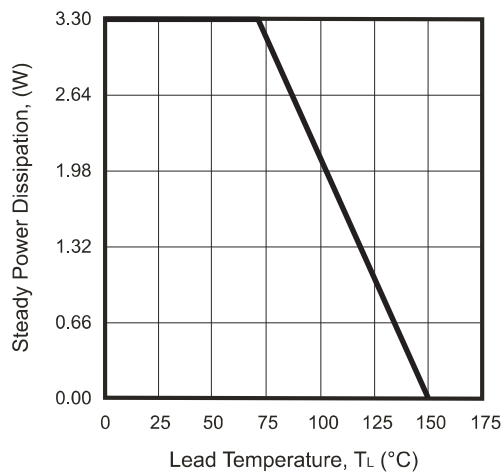


Fig.4 - Peak Pulse Power Rating Curve

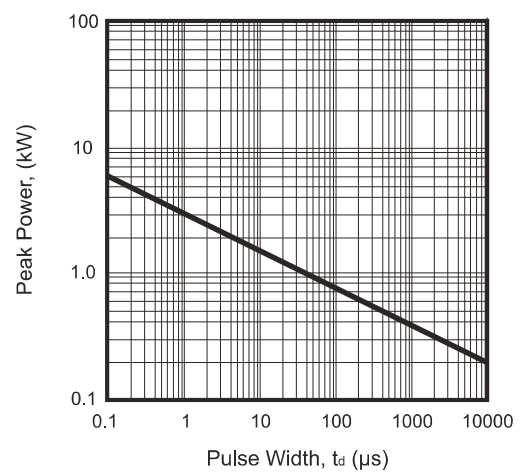


Fig.5 - Pulse Waveform



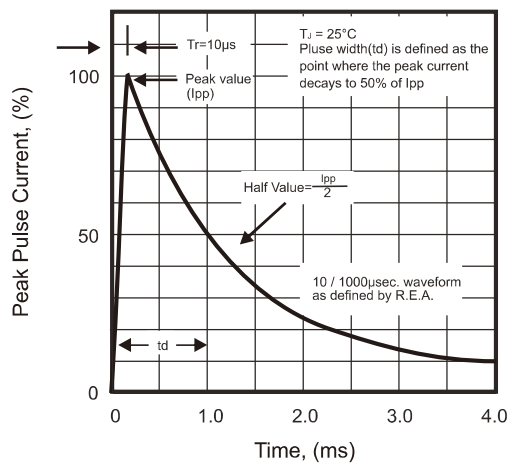


Fig.6 - Typical Junction Capacitance

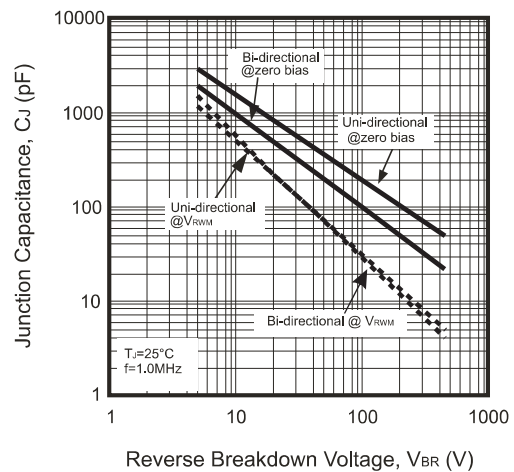

Marking Code


Part Number	Marking Code
SMAJ - Series	See Page 2~3

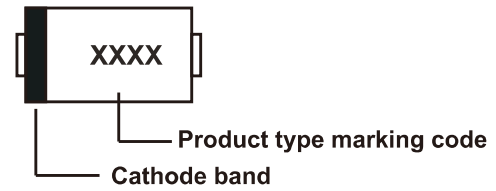

xxxx = Marking code (See Page 2~3)

Suggested PAD Layout


SIZE	DO-214AC(SMA)	
	(mm)	(inch)
A	5.58	0.220
B	1.66	0.065
C	1.96	0.077
D	2.04	0.080

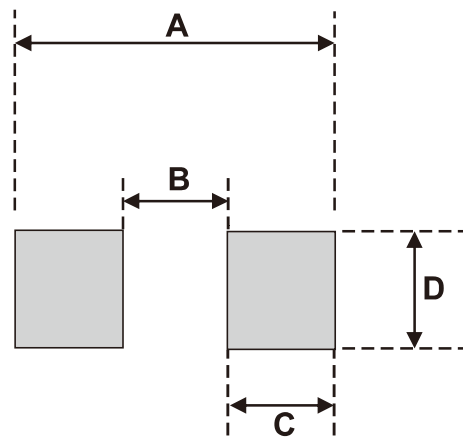

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SMA/DO-214AC	5,000	13

Reel Taping Specification

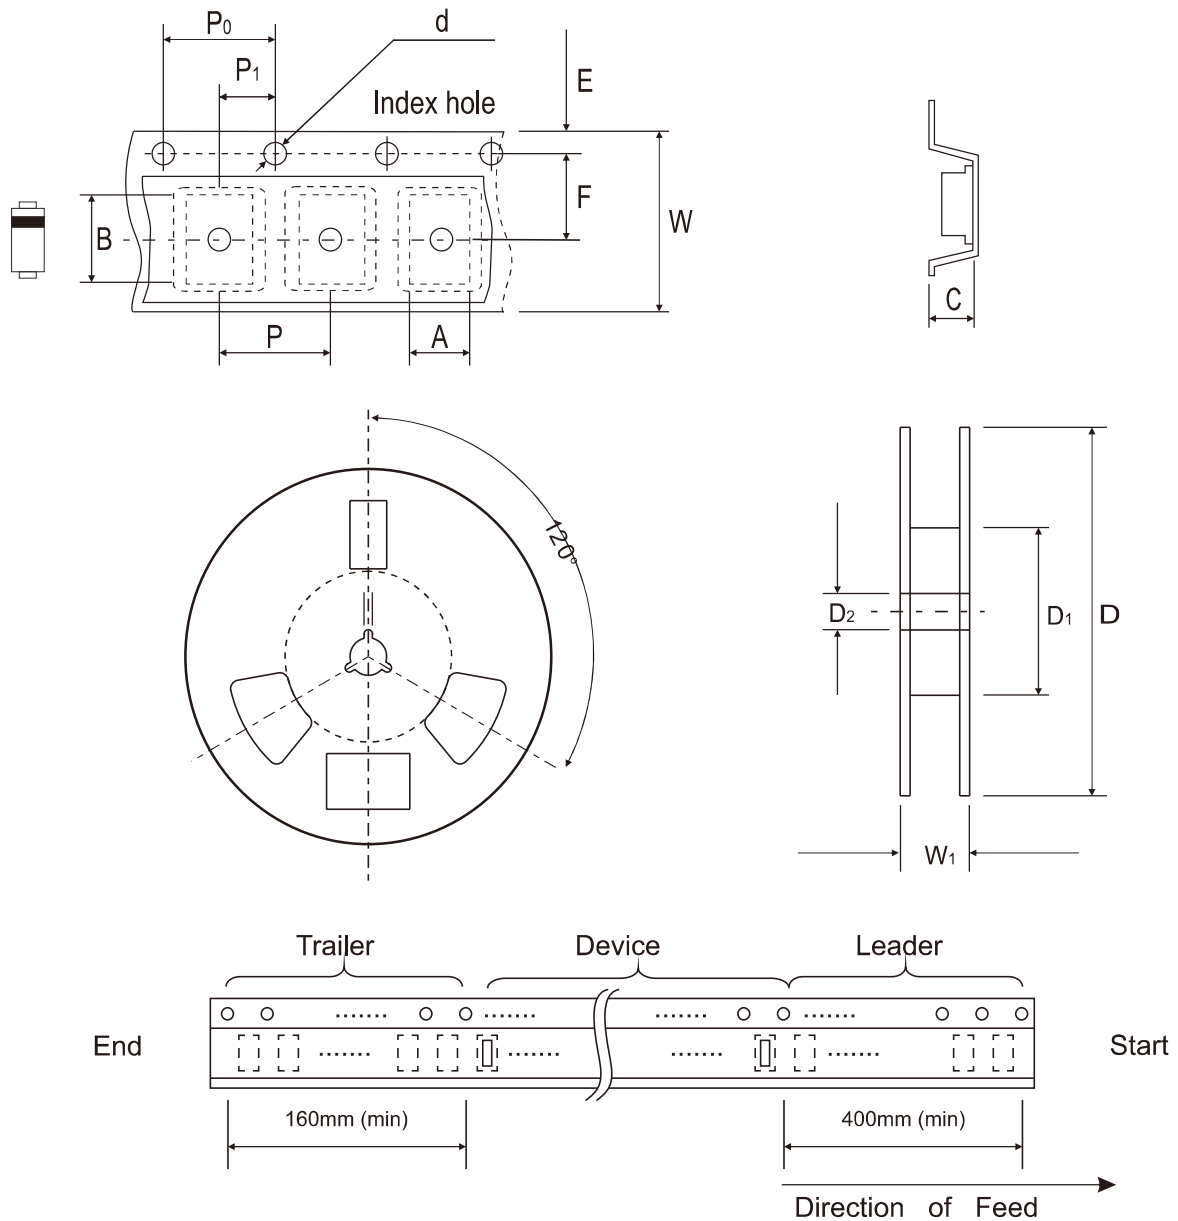

SMA/DO-214AC	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	2.79 ± 0.10	5.33 ± 0.10	4.50 (max)	1.75 ± 0.10	330MAX	50.0 MIN.	13.0 ± 0.2
	(inch)	0.110 ± 0.004	0.210 ± 0.004	0.177 (max)	0.069 ± 0.004	13.00MAX	1.969 MIN.	0.512 ± 0.008

SMA/DO-214AC	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	5.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	12.0 ± 0.30	18.4 MAX.
	(inch)	0.069 ± 0.004	0.216 ± 0.002	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.472 ± 0.012	0.724 MAX.