


Features

- 68V/90A
 $R_{DS(ON)}=6.5m\Omega(\text{typ.})@V_{GS}=10V$
- 100% UIS + R_g Tested
- Reliable and Rugged
- Lead Free and Green Devices Available
(RoHS Compliant)
- Moisture Sensitivity Level MSL1
(per JEDEC J-STD-020D)

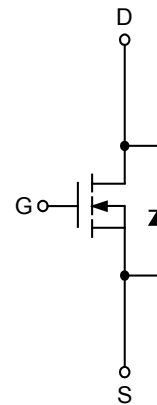
Applications

- Power Management for SMPS.
- DC-DC Converter.

Pin Description



Top View of TO-263



N-Channel MOSFET

Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$ Unless Otherwise Noted)

Symbol	Parameter		Rating	Unit
Common Ratings				
V _{DSS}	Drain-Source Voltage		68	V
V _{GSS}	Gate-Source Voltage		±20	
T _J	Maximum Junction Temperature		150	°C
T _{STG}	Storage Temperature Range		-55 to 150	
I _S	Diode Continuous Forward Current	T _C =25°C	90	A
I _D	Continuous Drain Current	T _C =25°C	90	
	Continuous Drain Current	T _C =100°C	54	
I _{DM}	Pulsed Drain Current	T _C =25°C	270	
P _D	Maximum Power Dissipation	T _C =25°C	89.3	W
		T _C =100°C	35.7	
R _{θJC}	Thermal Resistance-Junction to Case	Steady State	1.4	°C/W
R _{θJA} ^b	Thermal Resistance-Junction to Ambient	Steady State	50	°C/W
I _{AS} ^c	Avalanche Current, Single pulse	L=0.5mH	39	A
E _{AS} ^c	Avalanche Energy, Single pulse	L=0.5mH	380	mJ

Note * : Current limited by bonding wire.

Note a : Pulse width limited by max. junction temperature.

Note b : Surface mounted on 1in^2 pad area.

Note c : UIS tested and pulse width limited by maximum junction temperature (initial temperature $T_J=25^{\circ}\text{C}$).

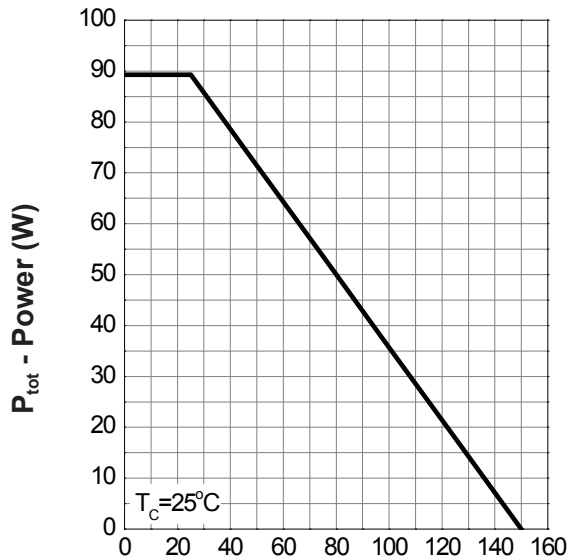
Electrical Characteristics (T_A = 25°C unless otherwise noted)

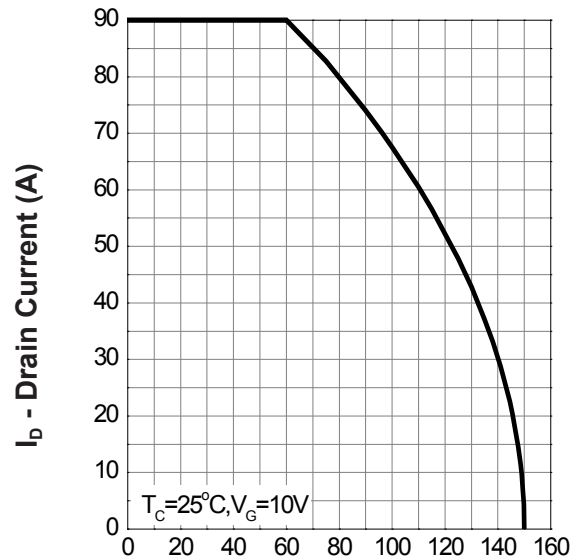
Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _{DS} =250μA	68	-	-	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =54.4V, V _{GS} =0V T _J =85°C	-	-	1 30	μA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _{DS} =250μA	2	3	4	V
I _{GSS}	Gate Leakage Current	V _{GS} =±20V, V _{DS} =0V	-	-	±100	nA
R _{DS(ON)} ^d	Drain-Source On-state Resistance	V _{GS} =10V, I _{DS} =40A	-	6.5	8	mΩ
Diode Characteristics						
V _{SD} ^d	Diode Forward Voltage	I _{SD} =20A, V _{GS} =0V	-	0.8	1.3	V
t _{rr}	Reverse Recovery Time	I _{SD} =40A, dI _{SD} /dt=100A/μs	-	34	-	ns
Q _{rr}	Reverse Recovery Charge		-	31	-	nC
Dynamic Characteristics ^e						
R _G	Gate Resistance	V _{GS} =0V, V _{DS} =0V, F=1MHz	-	1	-	Ω
C _{iss}	Input Capacitance	V _{GS} =0V, V _{DS} =30V, Frequency=1.0MHz	-	2380	3095	pF
C _{oss}	Output Capacitance		-	450	-	
C _{rss}	Reverse Transfer Capacitance		-	65	-	
t _{d(ON)}	Turn-on Delay Time	V _{DD} =30V, R _L =30Ω, I _{DS} =1A, V _{GEN} =10V, R _G =6Ω	-	18	32	ns
t _r	Turn-on Rise Time		-	8	14	
t _{d(OFF)}	Turn-off Delay Time		-	48	86	
t _f	Turn-off Fall Time		-	50	90	
Gate Charge Characteristics ^e						
Q _g	Total Gate Charge	V _{DS} =30V, V _{GS} =4.5V, I _{DS} =40A	-	17	-	nC
Q _g	Total Gate Charge	V _{DS} =30V, V _{GS} =10V, I _{DS} =40A	-	37	52	
Q _{gs}	Gate-Source Charge		-	9.1	-	
Q _{gd}	Gate-Drain Charge		-	5	-	

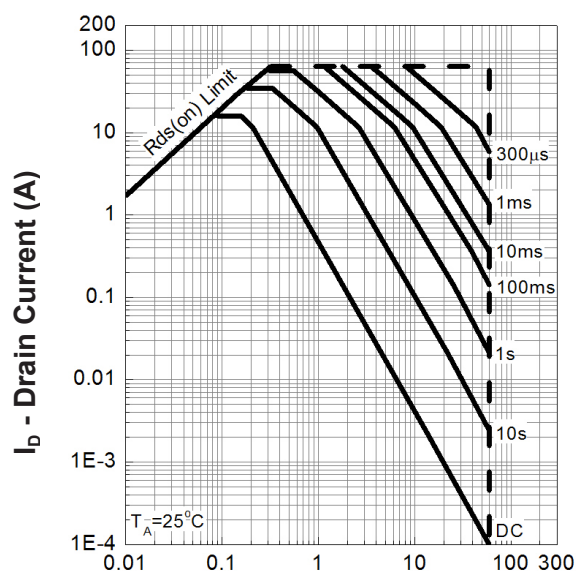
Note d : Pulse test ; pulse width≤300μs, duty cycle≤2%.

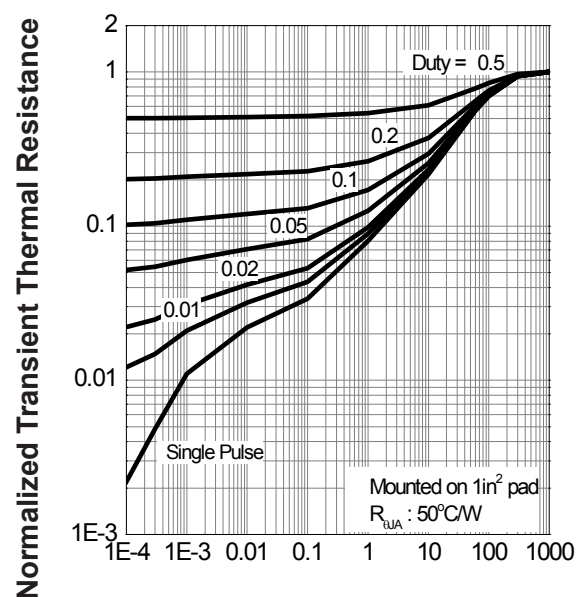
Note e : Guaranteed by design, not subject to production testing.

Typical Operating Characteristics

Power Dissipation

 T_j - Junction Temperature ($^{\circ}\text{C}$)

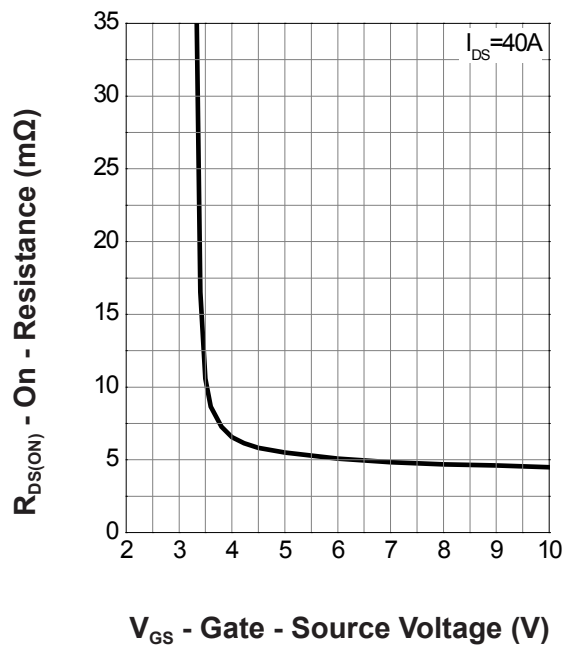
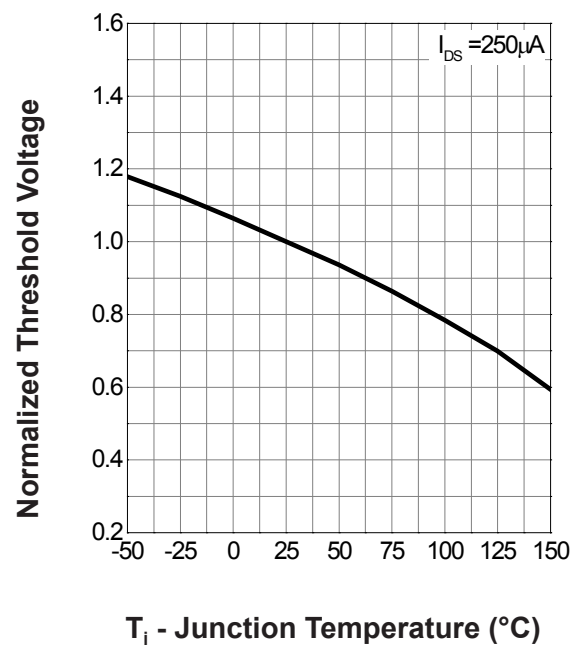
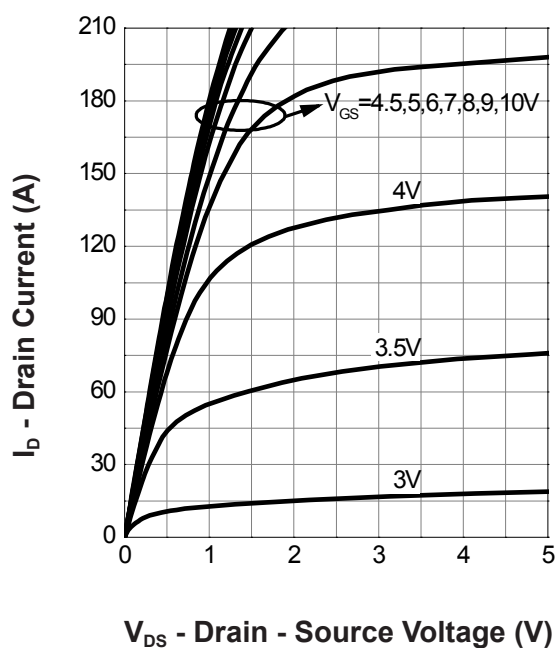
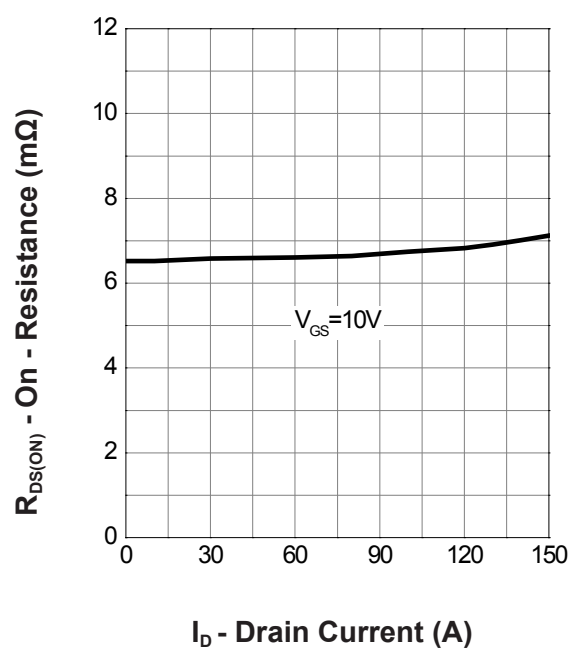
Drain Current

 T_j - Junction Temperature ($^{\circ}\text{C}$)

Safe Operation Area

 V_{DS} - Drain - Source Voltage (V)

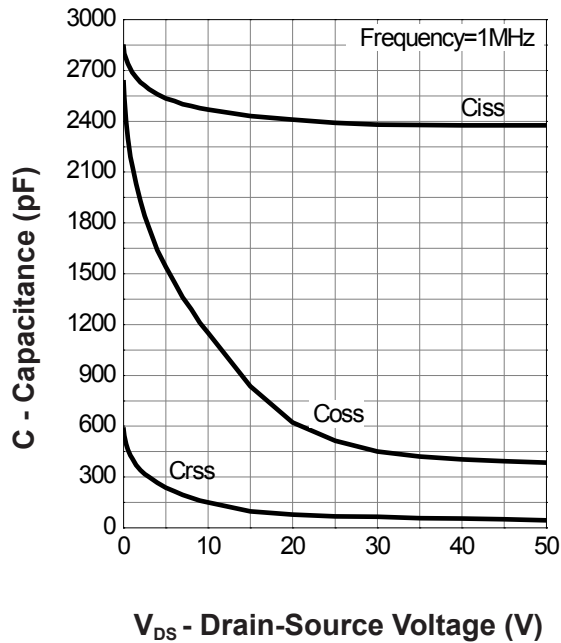
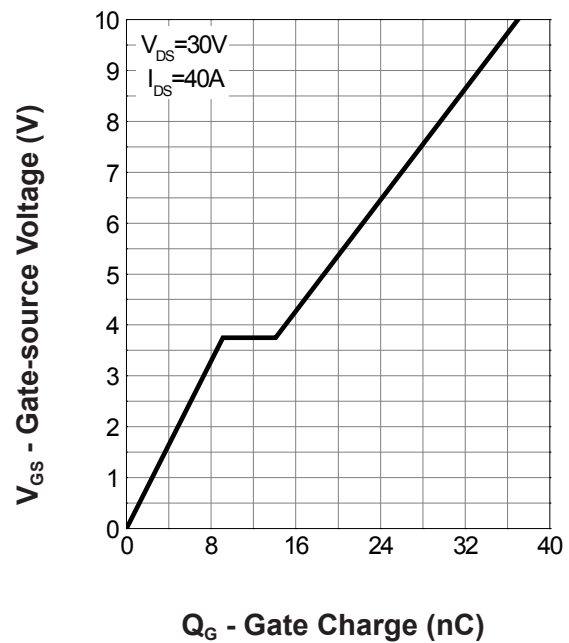
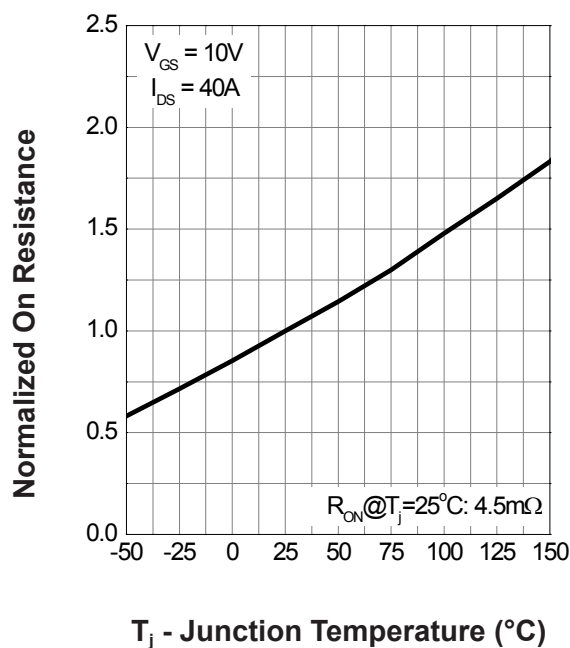
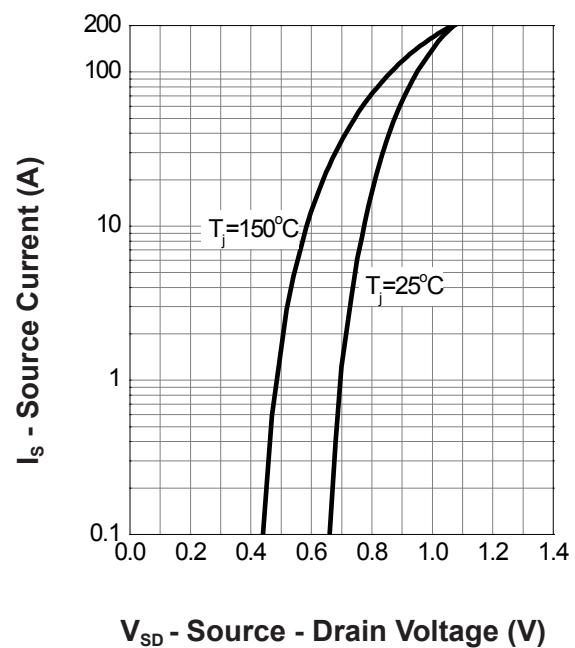
Thermal Transient Impedance


Square Wave Pulse Duration (sec)

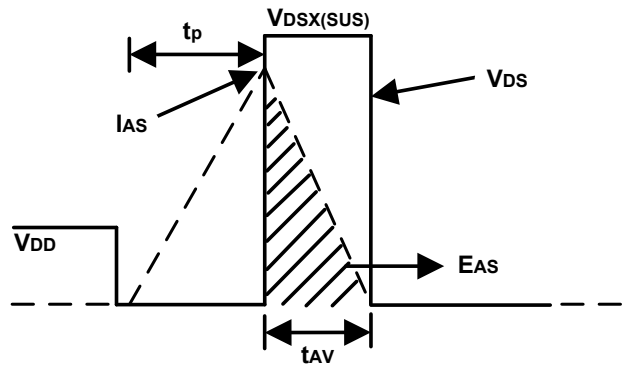
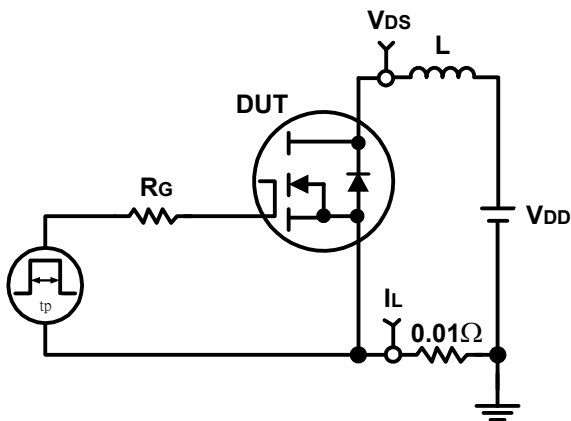
Typical Operating Characteristics(Cont.)

Gate-Source On Resistance

Gate Threshold Voltage

Output Characteristics

Drain-Source On Resistance


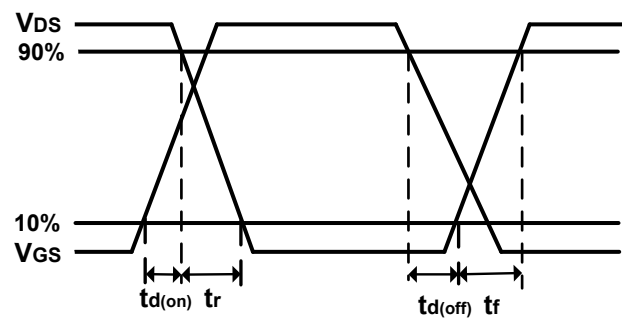
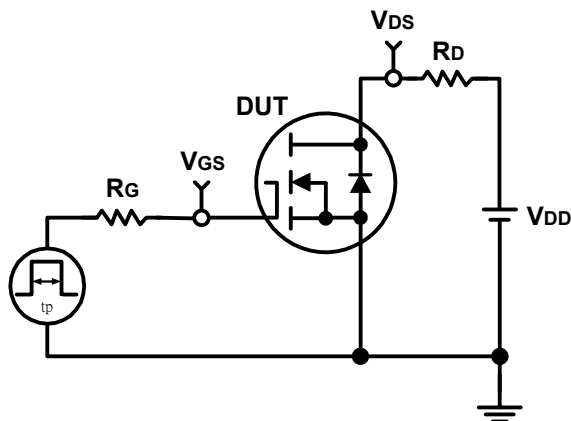
Typical Operating Characteristics(Cont.)

Capacitance

Gate Charge

Drain-Source On Resistance

Source-Drain Diode Forward


Avalanche Test Circuit and Waveforms

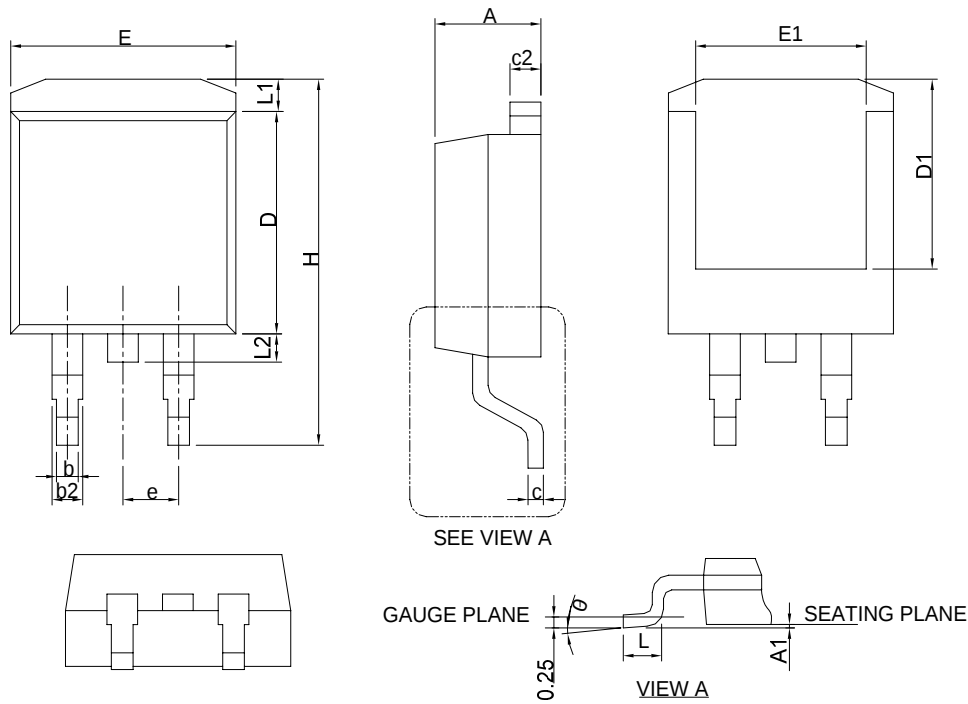


Switching Time Test Circuit and Waveforms



Package Information

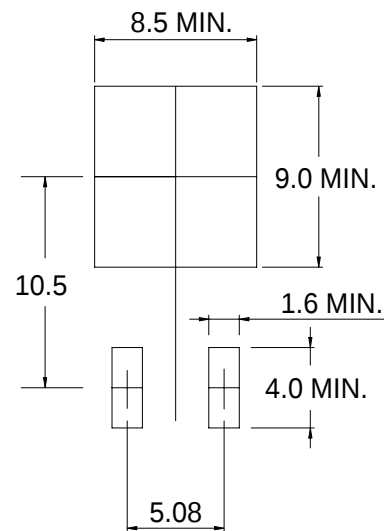
TO-263



SYMBOL	TO-263			
	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A	4.06	4.83	0.160	0.190
A1	0.00	0.25	0.000	0.010
b	0.51	0.99	0.020	0.039
b2	1.14	1.78	0.045	0.070
c	0.38	0.74	0.015	0.029
c2	1.14	1.65	0.045	0.065
D	8.38	9.65	0.330	0.380
D1	6.00	9.00	0.236	0.354
E	9.65	11.43	0.380	0.450
E1	6.22	9.00	0.245	0.354
e	2.54 BSC		0.100 BSC	
H	14.61	15.88	0.575	0.625
L	1.78	2.79	0.070	0.110
L1	-	1.68	-	0.066
L2	-	1.78	-	0.070
θ	0°	8°	0°	8°

Note : Follow JEDEC TO-263 AB.

RECOMMENDED LAND PATTERN



UNIT: mm