


Features

- 60V/65A
 $R_{DS(ON)} = 8m\Omega (typ.) @ V_{GS} = 10V$
 $R_{DS(ON)} = 10m\Omega (typ.) @ V_{GS} = 4.5V$
- 100% UIS + R_g Tested
- Reliable and Rugged
- Lead Free and Green Devices Available (RoHS Compliant)
- Moisture Sensitivity Level MSL1 (per JEDEC J-STD-020D)


Applications

- DC-DC Converter.
- Motor Control.
- Power Tools.
- Load Switching.

Pin Description

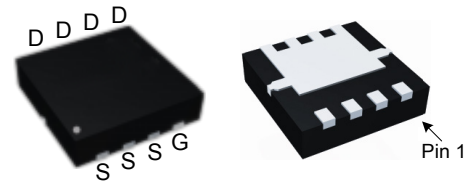

pdfn3.3*3.3-8L

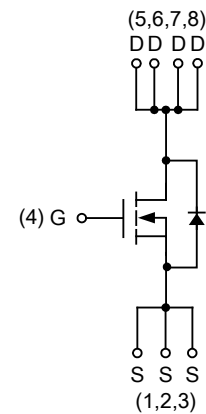

N-Channel MOSFET

Absolute Maximum Ratings (T_A=25°C Unless Otherwise Noted)

Symbol	Parameter		Rating	Unit
Common Ratings				
V _{DSS}	Drain-Source Voltage		60	V
V _{GSS}	Gate-Source Voltage		±20	
T _J	Maximum Junction Temperature		150	°C
T _{STG}	Storage Temperature Range		-55 to 150	
I _S	Diode Continuous Forward Current	T _C =25°C	65	A
I _D	Continuous Drain Current	T _C =25°C	65	A
		T _C =100°C	40	
I _{DM} ^a	Pulsed Drain Current	T _C =25°C	195	A
P _D	Maximum Power Dissipation	T _C =25°C	43.1	W
		T _C =100°C	17.2	
R _{θJC}	Thermal Resistance-Junction to Case		2.9	°C/W
R _{θJA} ^c	Thermal Resistance-Junction to Ambient		80	°C/W
I _{AS} ^b	Avalanche Current, Single pulse	L=0.5mH	11	A
E _{AS} ^b	Avalanche Energy, Single pulse	L=0.5mH	30	mJ

Note * : Current limited by bonding wire.

Note a : Pulse width is limited by maximum junction temperature.

Note b : UIS tested and pulse width limited by maximum junction temperature (initial temperature T_J=25°C).

Note c : Surface mounted on 1in² pad area.

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _{DS} =250μA	60	-	-	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =48V, V _{GS} =0V T _J =85°C	-	-	1 30	μA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _{DS} =250μA	1	2	3	V
I _{GSS}	Gate Leakage Current	V _{GS} =±20V, V _{DS} =0V	-	-	±100	nA
R _{DS(ON)} ^d	Drain-Source On-state Resistance	V _{GS} =10V, I _{DS} =15A V _{GS} =4.5V, I _{DS} =12A	-	8 10	10 13	mΩ
Diode Characteristics						
V _{SD} ^d	Diode Forward Voltage	I _{SD} =20A, V _{GS} =0V	-	0.8	1.3	V
t _{rr} ^e	Reverse Recovery Time	I _{SD} =20A, dI _{SD} /dt=100A/μs	-	30	-	ns
Q _{rr} ^e	Reverse Recovery Charge		-	25	-	nC
Dynamic Characteristics [°]						
R _G	Gate Resistance	V _{GS} =0V, V _{DS} =0V, F=1MHz	-	1	-	Ω
C _{iss}	Input Capacitance	V _{GS} =0V, V _{DS} =30V, Frequency=1.0MHz	-	1200	1550	pF
C _{oss}	Output Capacitance		-	180	-	
C _{rss}	Reverse Transfer Capacitance		-	4	-	
t _{d(ON)}	Turn-on Delay Time	V _{DD} =30V, R _L =30Ω, I _{DS} =1A, V _{GEN} =10V, R _G =6Ω	-	14	25	ns
t _r	Turn-on Rise Time		-	6	11	
t _{d(OFF)}	Turn-off Delay Time		-	33	59	
t _f	Turn-off Fall Time		-	31	56	
Gate Charge Characteristics [°]						
Q _g	Total Gate Charge	V _{DS} =30V, V _{GS} =4.5V, I _{DS} =20A	-	11.4	-	nC
Q _g	Total Gate Charge	V _{DS} =30V, V _{GS} =10V, I _{DS} =20A	-	24	34	
Q _{gs}	Gate-Source Charge		-	4.6	-	
Q _{gd}	Gate-Drain Charge		-	3.8	-	

Note d : Pulse test ; pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.

Note e : Guaranteed by design, not subject to production testing.


Typical Operating Characteristics

Power Dissipation

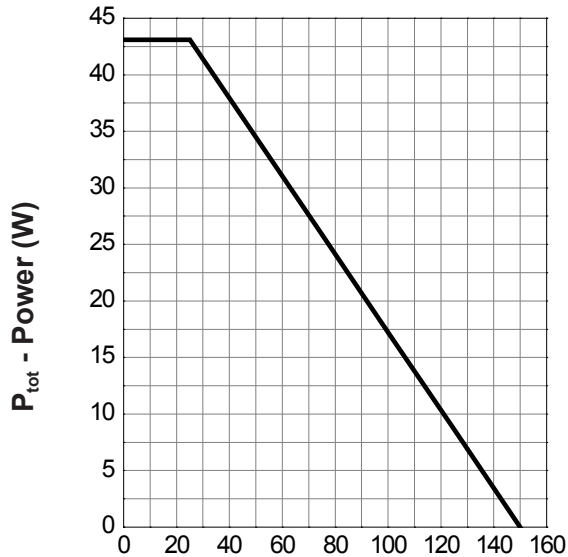


T_c - Case Temperature (°C)

Drain Current

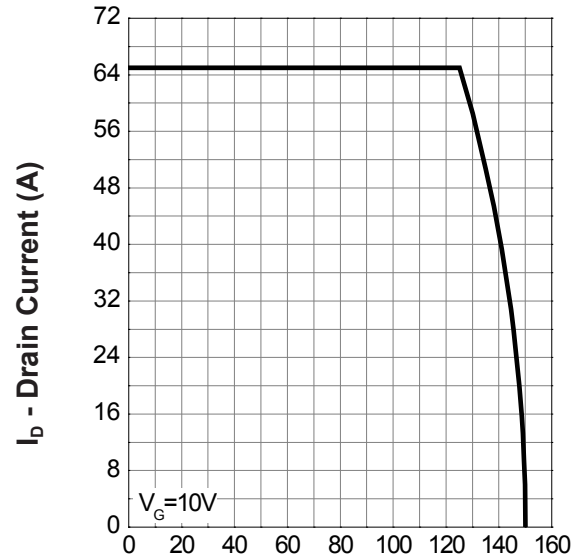


T_c - Case Temperature (°C)

Safe Operation Area

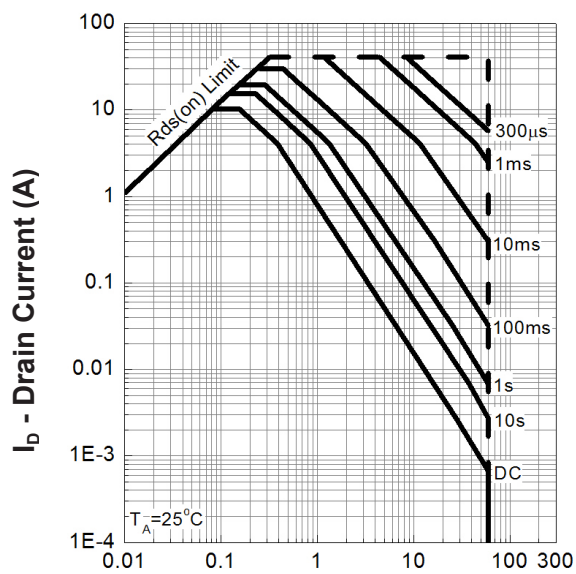

V_{DS} - Drain - Source Voltage (V)


Thermal Transient Impedance

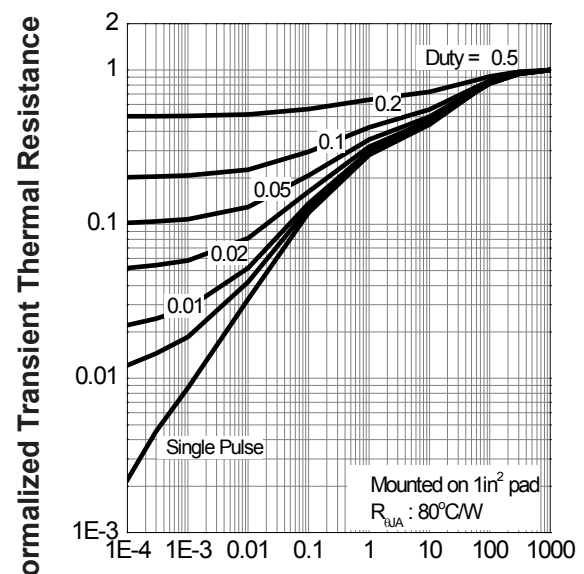


Square Wave Pulse Duration (sec)

Typical Operating Characteristics(Cont.)


Gate-Source On Resistance

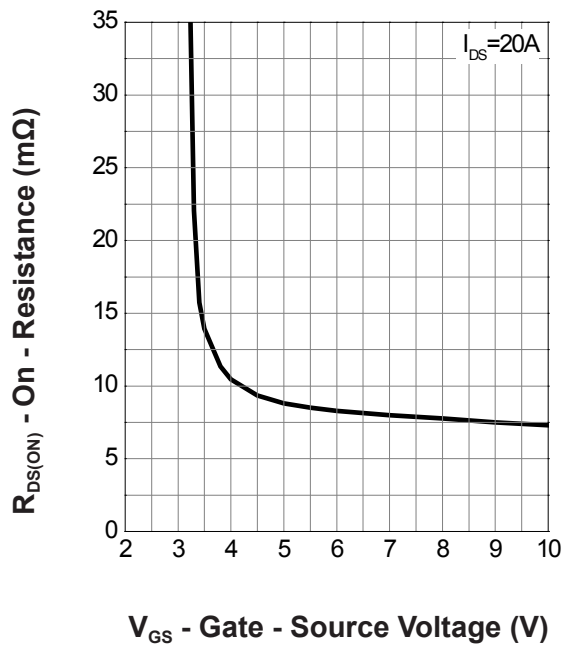


Gate Threshold Voltage

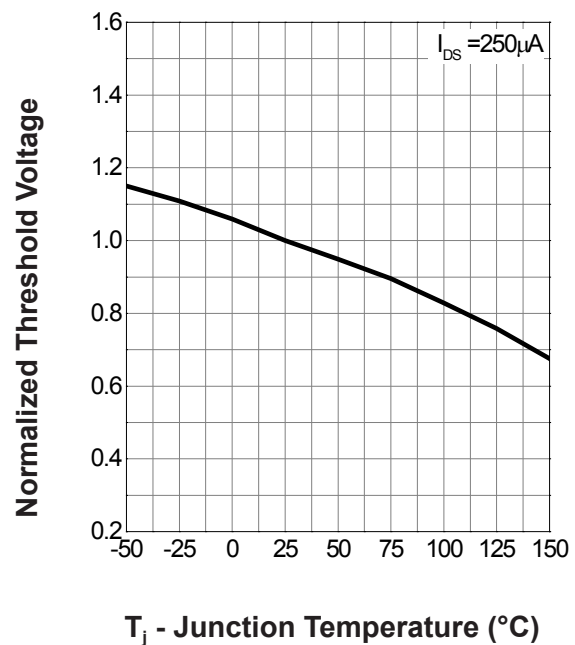

Output Characteristics

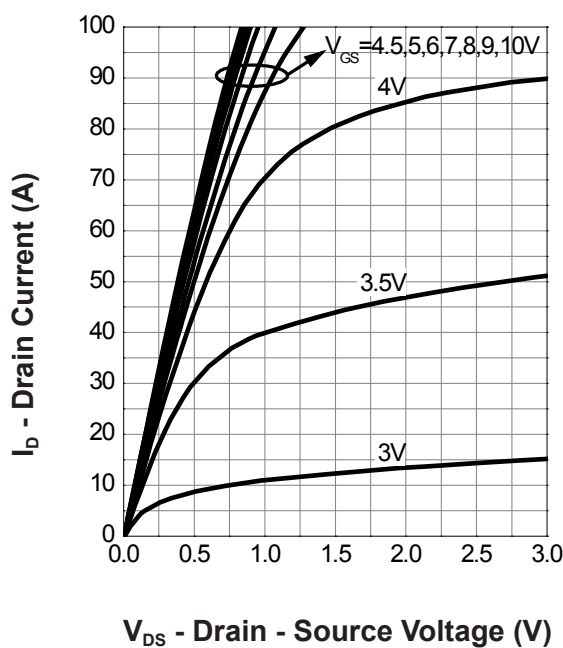


Drain-Source On Resistance

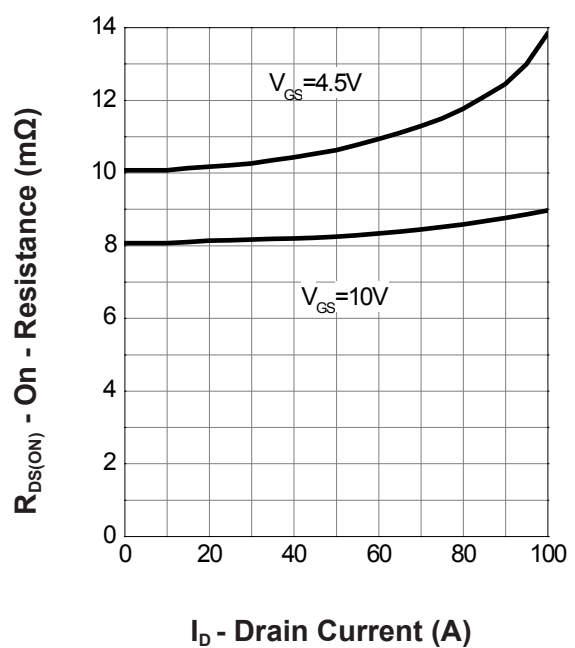


Typical Operating Characteristics(Cont.)


Capacitance

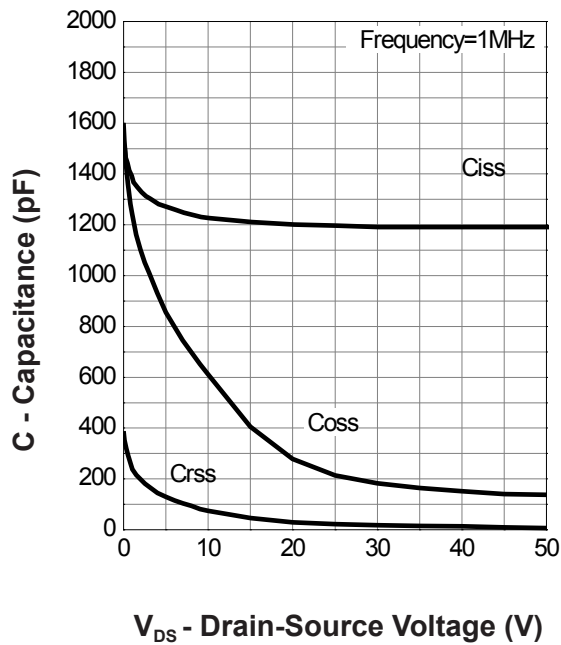


Gate Charge

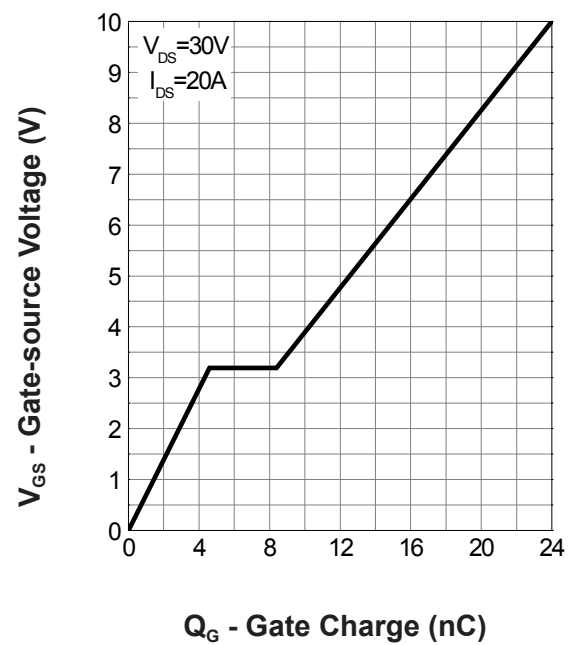



Drain-Source On Resistance

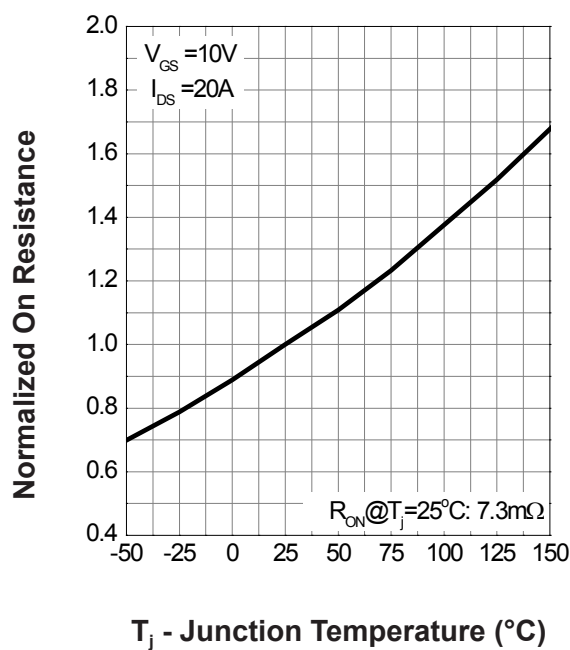



Source-Drain Diode Forward

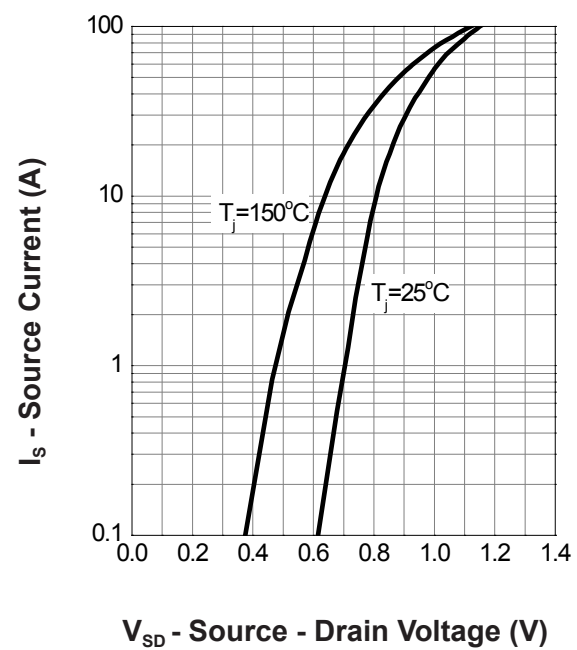

Avalanche Test Circuit and Waveforms

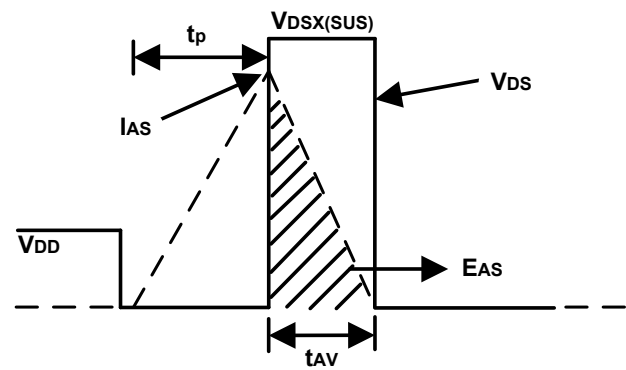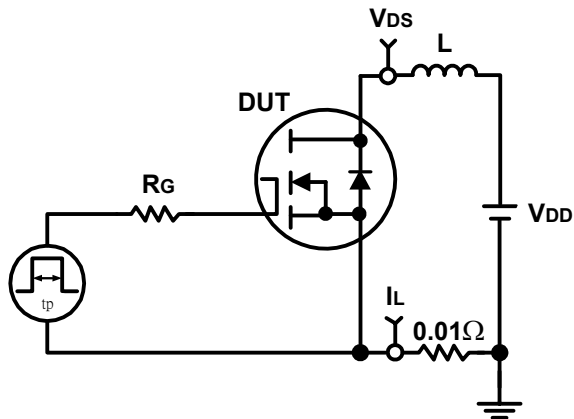


Switching Time Test Circuit and Waveforms

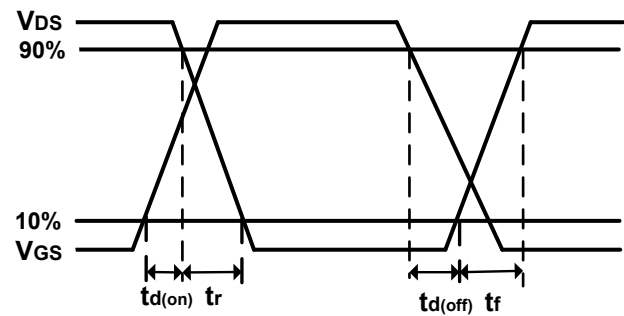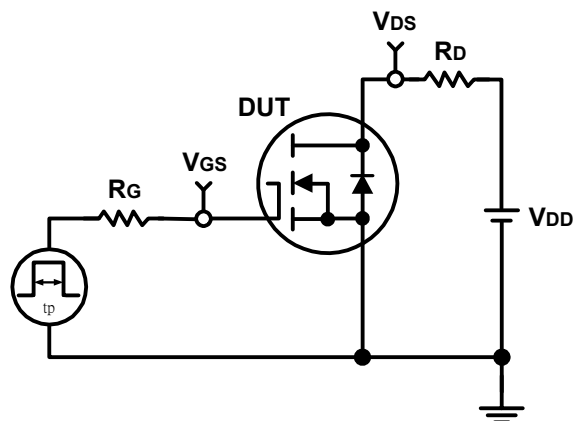

Package Information

pdfn3.3*3.3-8L

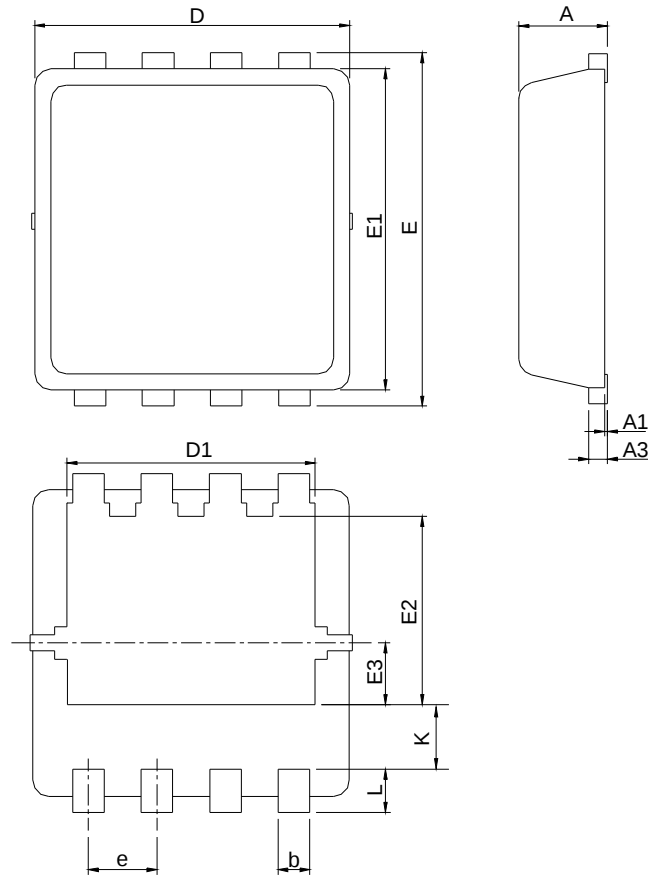

SYMBOL	pdfn3.3*3.3-8L			
	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A	0.80	1.00	0.031	0.039
A1	0.00	0.05	0.000	0.002
A3	0.10	0.25	0.004	0.010
b	0.24	0.35	0.009	0.014
D	2.90	3.10	0.114	0.122
D1	2.25	2.45	0.089	0.096
E	3.10	3.30	0.122	0.130
E1	2.90	3.10	0.114	0.122
E2	1.65	1.85	0.065	0.073
E3	0.56	0.58	0.022	0.023
e	0.65 BSC		0.026 BSC	
K	0.475	0.775	0.019	0.031
L	0.30	0.50	0.012	0.020

RECOMMENDED LAND PATTERN

