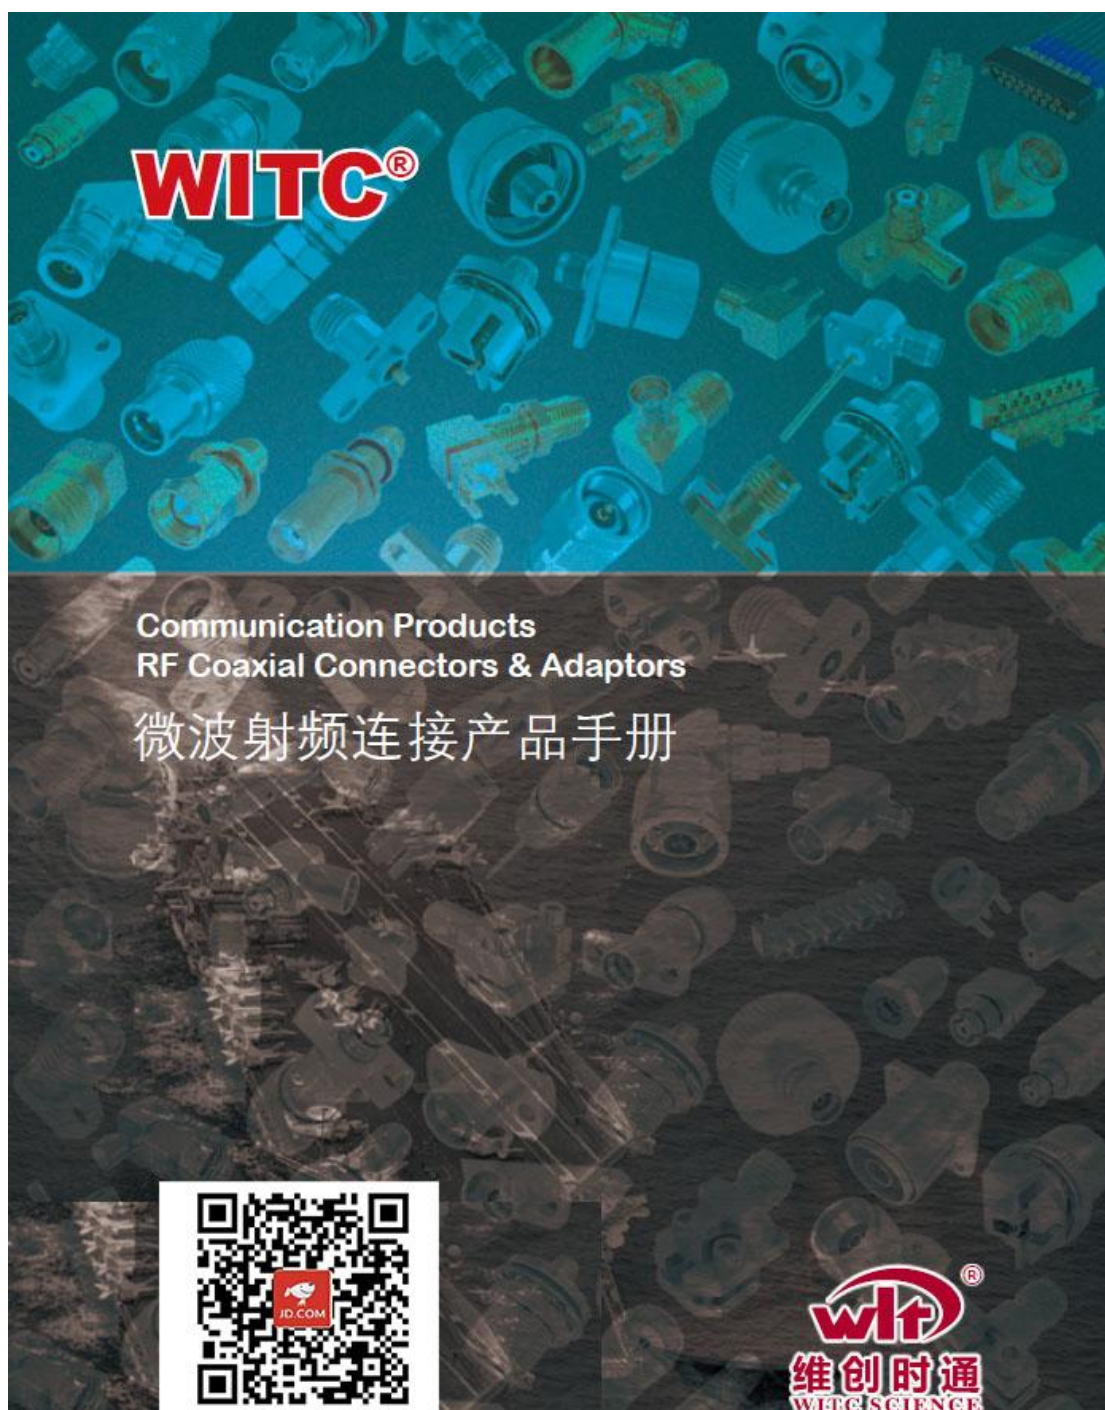



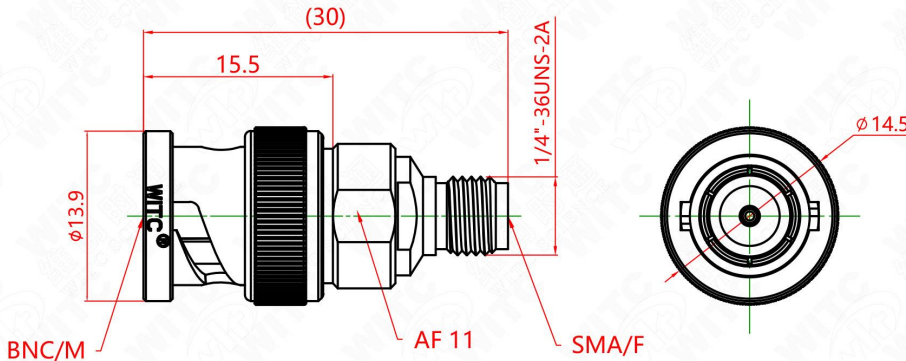


射频同轴转接器适配器：BNC 转 SMA

BNC 公头转 SMA 母头，BNC 母头转 SMA 母头

BNC 公头转 SMA 公头，BNC 母头转 SMA 公头

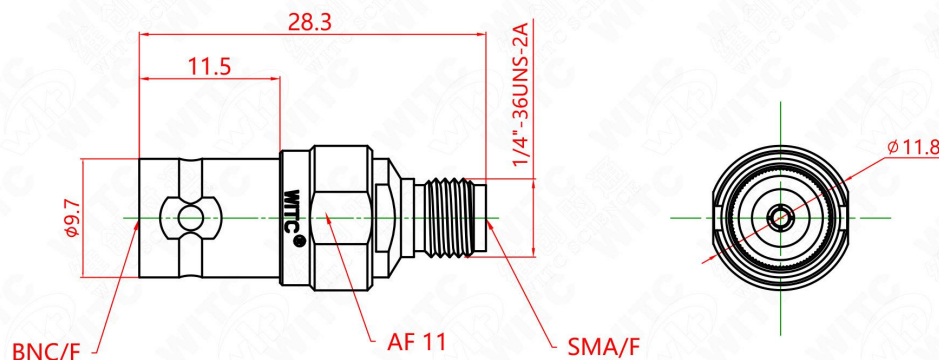
WITC

产品型号/Type	产品编号/Part No.	转接器/Adapter	
BNC/SMA-JKG1	10041-01-SA1		
RoHS			
			
电气特性/Electrical Specifications 特性阻抗/Impedance50Ω 频率范围/Frequency RangeDC-10GHz 驻波/VSWR1.35(Max) 插损/Insertion loss≤ 0.05 x SQRT(f(GHz))dB 中心体接触电阻 SMA/Center contact resistance≤ 3.0 mΩ 外导体接触电阻 SMA/Outer contact resistance≤ 2.5 mΩ 中心体接触电阻 BNC/Center contact resistance≤ 1.5 mΩ 外导体接触电阻 BNC/Outer contact resistance≤ 1.0 mΩ 介质耐压/Dielectric withstand voltage1000V rms			
界面/Interface SMA side : GB/T 11313.16-2015 BNC side : GB/T 11313.8-2015			
机械参数/Mechanical Data 中心针保持力/Center contact captivation≥26 Nm 连接耐久性/Connector Durability≥500 连接测试力矩 SMA/Coupling test torque1.7 Nm 推荐力矩 SMA/Recommended torque0.8 Nm~1.1 Nm			
材料/Material Data 零件/Piece Parts 中心导体/Center contact 外导体/Outer contact 连接螺帽/Coupling nut 密封圈/Gasket 绝缘体/Insulator 材料/Material 铍青铜/Beryllium bronze 不锈钢/Stainless steel 不锈钢/Stainless steel 硅橡胶/Silicone rubber 聚醚酰亚胺,聚四氟乙烯/PEI,PTFE 镀层/Surface Plating 镀金/Gold plating (Nickel underplated) 钝化/Passivated 钝化/Passivated 透明/Colourless			
环境参数/Environmental Data 使用温度/Operating Temperature-55℃ to 155℃			
版本/REV.	1.0	投影方向/Direction of view	未注公差尺寸的极限值



<https://item.jd.com/10226907499839.html>

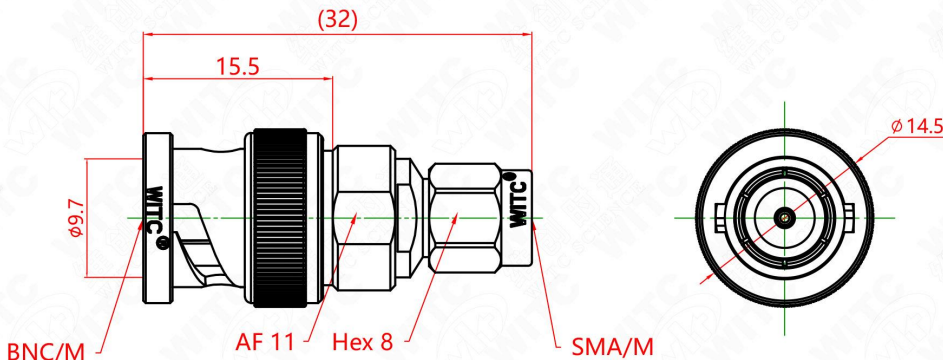
WITC

产品型号/Type	产品编号/Part No.	转接器/Adapter	
BNC/SMA-KKG1	10141-01-SA1		
RoHS			
			
电气特性/Electrical Specifications 特性阻抗/Impedance 50Ω 频率范围/Frequency Range DC-10GHz 驻波/VSWR 1.35(Max) 插损/Insertion loss ≤ 0.05 x SQRT(f(GHz))dB 中心体接触电阻 SMA/Center contact resistance ≤ 3.0 mΩ 外导体接触电阻 SMA/Outer contact resistance ≤ 2.5 mΩ 中心体接触电阻 BNC/Center contact resistance ≤ 1.5 mΩ 外导体接触电阻 BNC/Outer contact resistance ≤ 1.0 mΩ 介质耐压/Dielectric withstand voltage 1000V rms			
界面/Interface SMA side : GB/T 11313.15-2018 BNC side : GB/T 11313.8-2015			
机械参数/Mechanical Data 中心针接触力/Center contact captivation ≥26 Nm 连接耐久性/Connector Durability ≥500 连接测试力矩 SMA/Coupling test torque 1.7 Nm 推荐力矩 SMA/Recommended torque 0.8 Nm~1.1 Nm			
材料/Material Data 零件/Piece Parts 中心导体/Center contact 铍青铜/Beryllium bronze 外导体/Outer contact 不锈钢/Stainless steel 绝缘体/Insulator 聚醚酰亚胺,聚四氟乙烯/PEI,PTFE			镀层/Surface Plating 镀金/Gold plating (Nickel underplated) 钝化/Passivated
环境参数/Environmental Data 使用温度/Operating Temperature -55°C to 155°C			
版本/REV.	1.0	投影方向/Direction of view	 未注公差尺




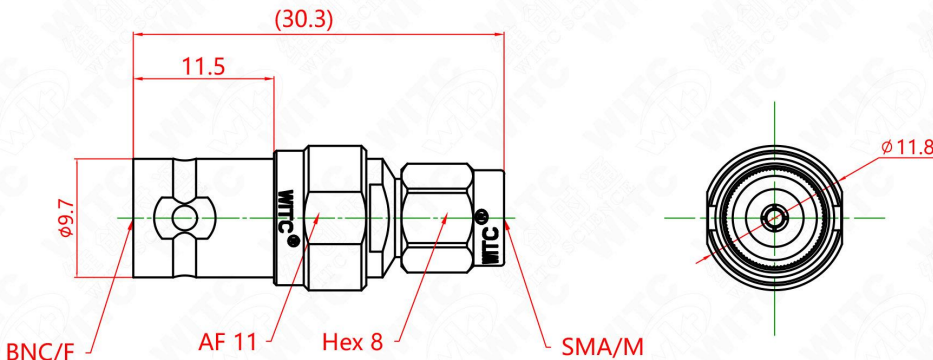

<https://item.jd.com/10226907977543.html>

WITC

产品型号/Type	产品编号/Part No.	转接器/Adapter	
BNC/SMA-JJG1	10040-01-SA1		
RoHS			
			
电气特性/Electrical Specifications 特性阻抗/Impedance 50Ω 频率范围/Frequency Range DC-10GHz 驻波/VSWR 1.35(Max) 插损/Insertion loss ≤ 0.05 x SQRT(f(GHz))dB 中心体接触电阻 SMA/Center contact resistance ≤ 3.0 mΩ 外导体接触电阻 SMA/Outer contact resistance ≤ 2.5 mΩ 中心体接触电阻 BNC/Center contact resistance ≤ 1.5 mΩ 外导体接触电阻 BNC/Outer contact resistance ≤ 1.0 mΩ 介质耐压/Dielectric withstand voltage 1000V rms			
界面/Interface SMA side : GB/T 11313.15-2018 BNC side : GB/T 11313.8-2015			
机械参数/Mechanical Data 中心针保持力/Center contact captivation ≥26 N 连接耐久性/Connector Durability ≥500 连接测试力矩 SMA/Coupling test torque 1.7 Nm 推荐力矩 SMA/Recommended torque 0.8 Nm~1.1 Nm			
材料/Material Data 零件/Piece Parts 中心导体/Center contact 镀青铜/Beryllium bronze 外导体/Outer contact 不锈钢/Stainless steel 连接螺帽/Coupling nut 不锈钢/Stainless steel 密封圈/Gasket 硅橡胶/Silicone rubber 绝缘体/Insulator 聚醚酰亚胺,聚四氟乙烯/PEI,PTFE		镀层/Surface Plating 镀金/Gold plating (Nickel underplated) 钝化/Passivated 钝化/Passivated 透明/Colourless	
环境参数/Environmental Data 使用温度/Operating Temperature -55℃ to 155℃			
版本/REV.	1.0	投影方向/Direction of view	未注公差尺寸的极限

<https://item.jd.com/10226906635206.html>

WITC

产品型号/Type	产品编号/Part No.	转接器/Adapter																																															
BNC/SMA-KJG1	10140-01-SA1																																																
RoHS																																																	
																																																	
电气特性/Electrical Specifications <table><tr><td>特性阻抗/Impedance</td><td>50Ω</td></tr><tr><td>频率范围/Frequency Range</td><td>DC-10GHz</td></tr><tr><td>驻波/VSWR</td><td>1.35(Max)</td></tr><tr><td>插损/Insertion loss</td><td>≤ 0.05 x SQRT(f(GHz))dB</td></tr><tr><td>中心体接触电阻 SMA/Center contact resistance</td><td>≤ 3.0 mΩ</td></tr><tr><td>外导体接触电阻 SMA/Outer contact resistance</td><td>≤ 2.5 mΩ</td></tr><tr><td>中心体接触电阻 BNC/Center contact resistance</td><td>≤ 1.5 mΩ</td></tr><tr><td>外导体接触电阻 BNC/Outer contact resistance</td><td>≤ 1.0 mΩ</td></tr><tr><td>介质耐压/Dielectric withstand voltage</td><td>1000V rms</td></tr></table> 界面/Interface SMA side : GB/T 11313.15-2018 BNC side : GB/T 11313.8-2015 机械参数/Mechanical Data <table><tr><td>中心针接触力/Center contact captivation</td><td>≥26 Nm</td></tr><tr><td>连接耐久性/Connector Durability</td><td>≥500</td></tr><tr><td>连接测试力矩 SMA/Coupling test torque</td><td>1.7 Nm</td></tr><tr><td>推荐力矩 SMA/Recommended torque</td><td>0.8 Nm~1.1 Nm</td></tr></table> 材料/Material Data <table><tr><td>零件/Piece Parts</td><td>材料/Material</td><td>镀层/Surface Plating</td></tr><tr><td>中心导体/Center contact</td><td>铍青铜/Beryllium bronze</td><td>镀金/Gold plating (Nickel underplated)</td></tr><tr><td>外导体/Outer contact</td><td>不锈钢/Stainless steel</td><td>钝化/Passivated</td></tr><tr><td>连接螺帽/Coupling nut</td><td>不锈钢/Stainless steel</td><td>钝化/Passivated</td></tr><tr><td>密封圈/Gasket</td><td>硅橡胶/Silicone rubber</td><td>透明/Colourless</td></tr><tr><td>绝缘体/Insulator</td><td>聚醚酰亚胺, 聚四氟乙烯/PEI, PTFE</td><td></td></tr></table> 环境参数/Environmental Data <table><tr><td>使用温度/Operating Temperature</td><td>-55℃ to 155℃</td></tr></table> 版本/REV. 1.0 投影方向/Direction of view  未注公差尺寸的极限偏差按 				特性阻抗/Impedance	50Ω	频率范围/Frequency Range	DC-10GHz	驻波/VSWR	1.35(Max)	插损/Insertion loss	≤ 0.05 x SQRT(f(GHz))dB	中心体接触电阻 SMA/Center contact resistance	≤ 3.0 mΩ	外导体接触电阻 SMA/Outer contact resistance	≤ 2.5 mΩ	中心体接触电阻 BNC/Center contact resistance	≤ 1.5 mΩ	外导体接触电阻 BNC/Outer contact resistance	≤ 1.0 mΩ	介质耐压/Dielectric withstand voltage	1000V rms	中心针接触力/Center contact captivation	≥26 Nm	连接耐久性/Connector Durability	≥500	连接测试力矩 SMA/Coupling test torque	1.7 Nm	推荐力矩 SMA/Recommended torque	0.8 Nm~1.1 Nm	零件/Piece Parts	材料/Material	镀层/Surface Plating	中心导体/Center contact	铍青铜/Beryllium bronze	镀金/Gold plating (Nickel underplated)	外导体/Outer contact	不锈钢/Stainless steel	钝化/Passivated	连接螺帽/Coupling nut	不锈钢/Stainless steel	钝化/Passivated	密封圈/Gasket	硅橡胶/Silicone rubber	透明/Colourless	绝缘体/Insulator	聚醚酰亚胺, 聚四氟乙烯/PEI, PTFE		使用温度/Operating Temperature	-55℃ to 155℃
特性阻抗/Impedance	50Ω																																																
频率范围/Frequency Range	DC-10GHz																																																
驻波/VSWR	1.35(Max)																																																
插损/Insertion loss	≤ 0.05 x SQRT(f(GHz))dB																																																
中心体接触电阻 SMA/Center contact resistance	≤ 3.0 mΩ																																																
外导体接触电阻 SMA/Outer contact resistance	≤ 2.5 mΩ																																																
中心体接触电阻 BNC/Center contact resistance	≤ 1.5 mΩ																																																
外导体接触电阻 BNC/Outer contact resistance	≤ 1.0 mΩ																																																
介质耐压/Dielectric withstand voltage	1000V rms																																																
中心针接触力/Center contact captivation	≥26 Nm																																																
连接耐久性/Connector Durability	≥500																																																
连接测试力矩 SMA/Coupling test torque	1.7 Nm																																																
推荐力矩 SMA/Recommended torque	0.8 Nm~1.1 Nm																																																
零件/Piece Parts	材料/Material	镀层/Surface Plating																																															
中心导体/Center contact	铍青铜/Beryllium bronze	镀金/Gold plating (Nickel underplated)																																															
外导体/Outer contact	不锈钢/Stainless steel	钝化/Passivated																																															
连接螺帽/Coupling nut	不锈钢/Stainless steel	钝化/Passivated																																															
密封圈/Gasket	硅橡胶/Silicone rubber	透明/Colourless																																															
绝缘体/Insulator	聚醚酰亚胺, 聚四氟乙烯/PEI, PTFE																																																
使用温度/Operating Temperature	-55℃ to 155℃																																																



<https://item.jd.com/10226906565633.html>