

Description

The RST0130A uses advanced trench technology and design to provide excellent $R_{DS(ON)}$ with low gate charge. It can be used in a wide variety of applications.

General Features


- $V_{DS} = 100V, I_D = 30A$
 $R_{DS(ON)} < 32m\Omega @ V_{GS}=10V$ (Typ:25m Ω)
- Special process technology for high ESD capability
- High density cell design for ultra low R_{dson}
- Fully characterized avalanche voltage and current
- Good stability and uniformity with high E_{AS}
- Excellent package for good heat dissipation

Application


- Power switching application
- Hard switched and high frequency circuits
- Uninterruptible power supply

100% UIS TESTED!


100% ΔV_{ds} TESTED!



Schematic diagram



Marking and pin assignment



TO-220-3L top view

Package Marking and Ordering Information

Device Marking	Device	Device Package	Reel Size	Tape width	Quantity
RST0130A	RST0130A	TO-220-3L	-	-	-

Absolute Maximum Ratings ($T_C=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	100	V
Gate-Source Voltage	V_{GS}	± 20	V
Drain Current-Continuous	I_D	30	A
Drain Current-Continuous($T_C=100^\circ\text{C}$)	$I_D (100^\circ\text{C})$	21	A
Pulsed Drain Current (Note 1)	I_{DM}	120	A
Maximum Power Dissipation	P_D	85	W
Derating factor		0.57	W/ $^\circ\text{C}$
Single pulse avalanche energy (Note 5)	E_{AS}	200	mJ
V_{DS} Spike (Note 6)	10 μs	120	V
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 To 175	$^\circ\text{C}$

Thermal Characteristic

Thermal Resistance, Junction-to-Case (Note 2)	$R_{\theta JC}$	1.8	$^\circ\text{C/W}$
---	-----------------	-----	--------------------

Electrical Characteristics ($T_C=25^{\circ}\text{C}$ unless otherwise noted)


Symbol		Parameter	Condition	Min	Typ	Max	Unit
Off Characteristics							
BV _{DSS}	Drain-Source Breakdown Voltage		V _{GS} =0V I _D =250μA	100	115	-	V
I _{DSS}	Zero Gate Voltage Drain Current		V _{DS} =100V, V _{GS} =0V	-	-	1	μA
I _{GSS}	Gate-Body Leakage Current		V _{GS} =±20V, V _{DS} =0V	-	-	±100	nA
On Characteristics ^(Note 3)							
V _{GS(th)}	Gate Threshold Voltage		V _{DS} =V _{GS} , I _D =250μA	1.3	1.9	2.5	V
R _{DS(ON)}	Drain-Source On-State Resistance		V _{GS} =10V, I _D =10A	-	25	32	mΩ
g _{FS}	Forward Transconductance		V _{DS} =5V, I _D =10A	-	15	-	S
Dynamic Characteristics ^(Note4)							
C _{iss}	Input Capacitance		V _{DS} =50V, V _{GS} =0V, F=1.0MHz	-	2479	-	PF
C _{oss}	Output Capacitance			-	96	-	PF
C _{rss}	Reverse Transfer Capacitance			-	79	-	PF
Switching Characteristics ^(Note 4)							
t _{d(on)}	Turn-on Delay Time		V _{DD} =50V, R _L =5Ω V _{GS} =10V, R _{GEN} =3Ω	-	9	-	nS
t _r	Turn-on Rise Time			-	9	-	nS
t _{d(off)}	Turn-Off Delay Time			-	32	-	nS
t _f	Turn-Off Fall Time			-	8	-	nS
Q _g	Total Gate Charge		V _{DS} =50V, I _D =10A, V _{GS} =10V	-	67.2	-	nC
Q _{gs}	Gate-Source Charge			-	9.4	-	nC
Q _{gd}	Gate-Drain Charge			-	15.5	-	nC
Drain-Source Diode Characteristics							
V _{SD}	Diode Forward Voltage ^(Note 3)		V _{GS} =0V, I _S =10A	-	-	1.2	V
I _S	Diode Forward Current ^(Note 2)		-	-	-	30	A
t _{rr}	Reverse Recovery Time		T _J = 25°C, I _F = 10A di/dt = 100A/μs ^(Note3)	-	32	-	nS
Q _{rr}	Reverse Recovery Charge			-	53	-	nC
t _{on}	Forward Turn-On Time		Intrinsic turn-on time is negligible (turn-on is dominated by LS+LD)				

Notes:


1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, $t \leq 10$ sec.
3. Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$.
4. Guaranteed by design, not subject to production
5. EAS Condition : $T_J=25^{\circ}\text{C}, V_{DD}=50V, V_G=10V, L=0.5mH, R_g=25\Omega$
6. The spike duty cycle 5% max, limited by junction temperature $T_J(\text{MAX})=125^{\circ}\text{C}$

Test Circuit

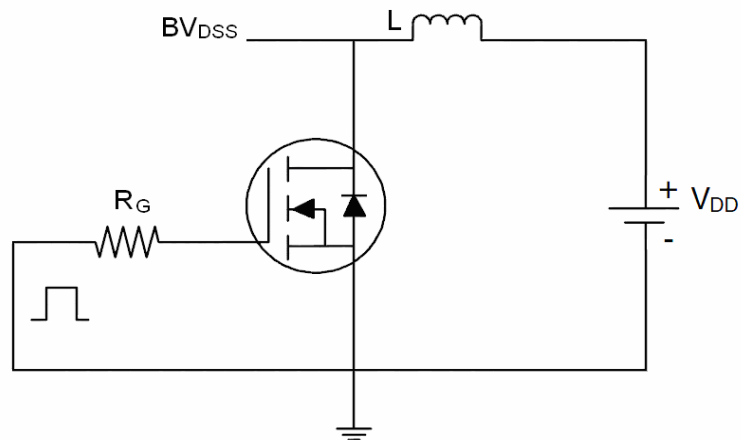
1) E_{AS} Test Circuit








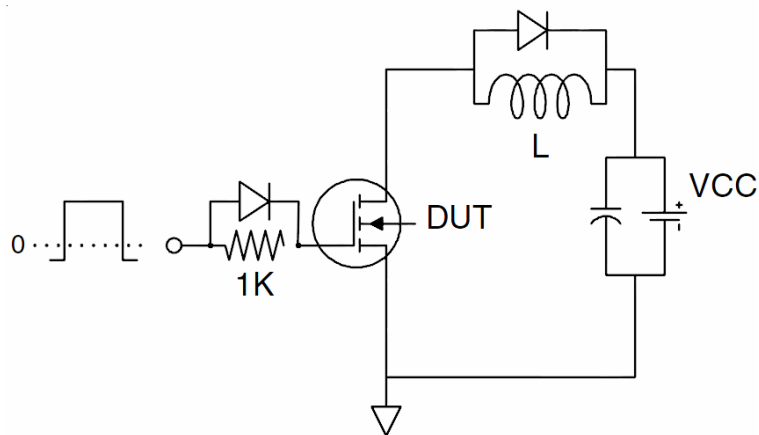
2) Gate Charge Test Circuit



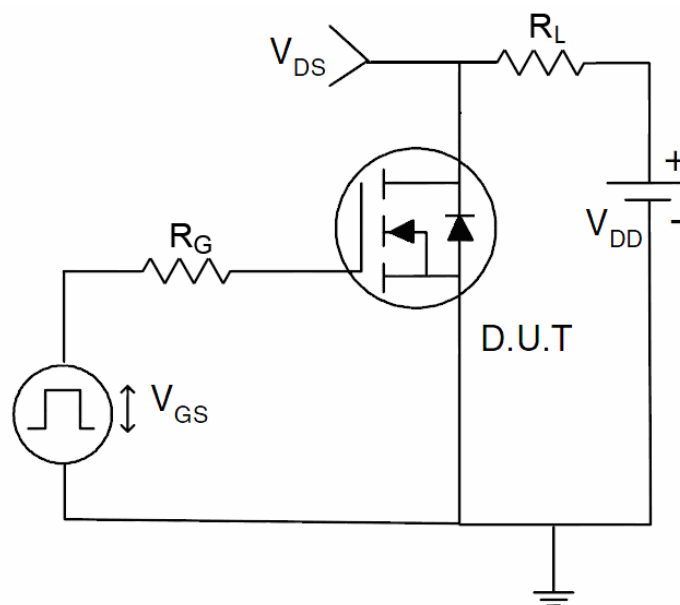3) Switch Time Test Circuit



Typical Electrical and Thermal Characteristics (Curves)

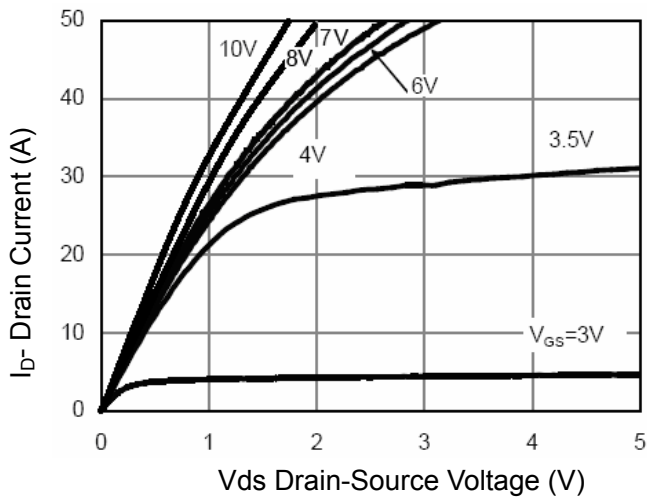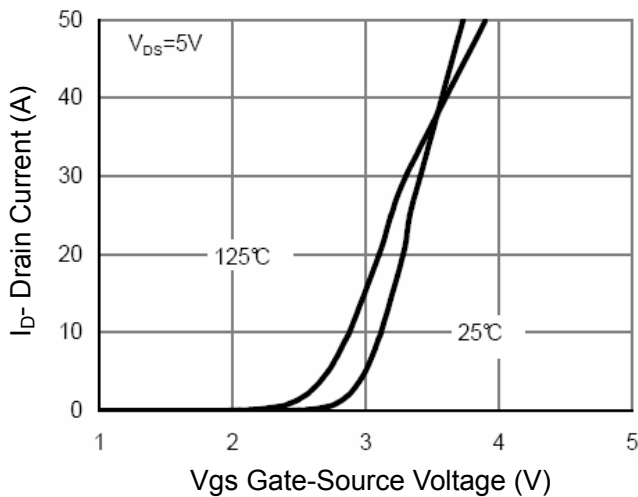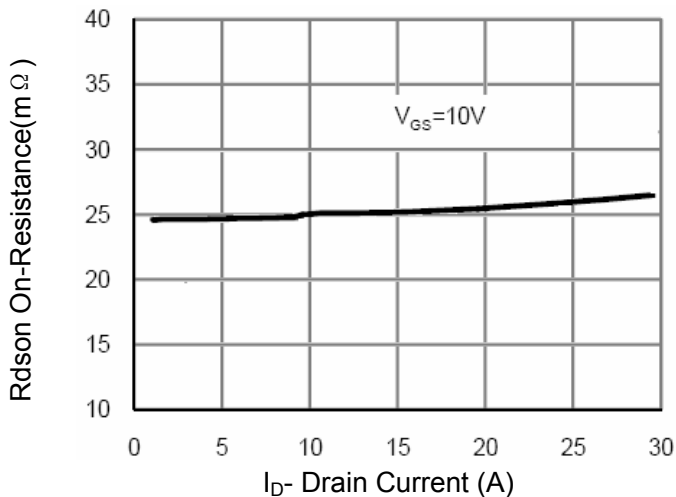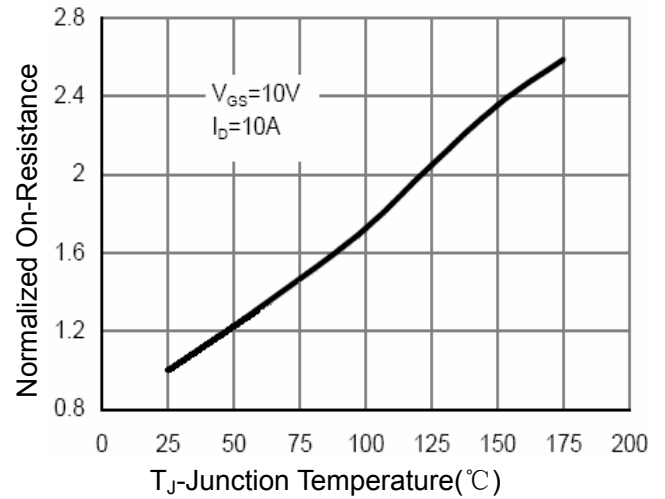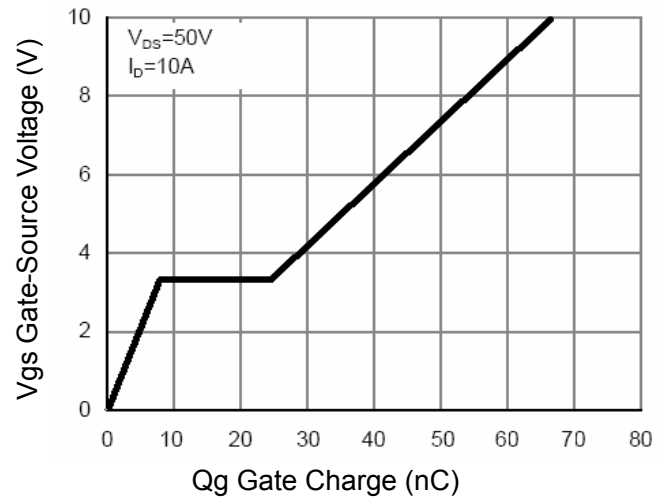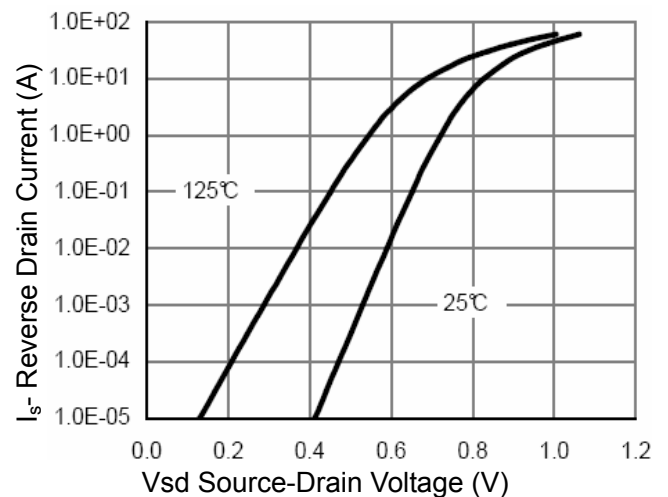
Figure 1 Output Characteristics

Figure 2 Transfer Characteristics

Figure 3 Rdson- Drain Current

Figure 4 Rdson-Junction Temperature

Figure 5 Gate Charge

Figure 6 Source- Drain Diode Forward

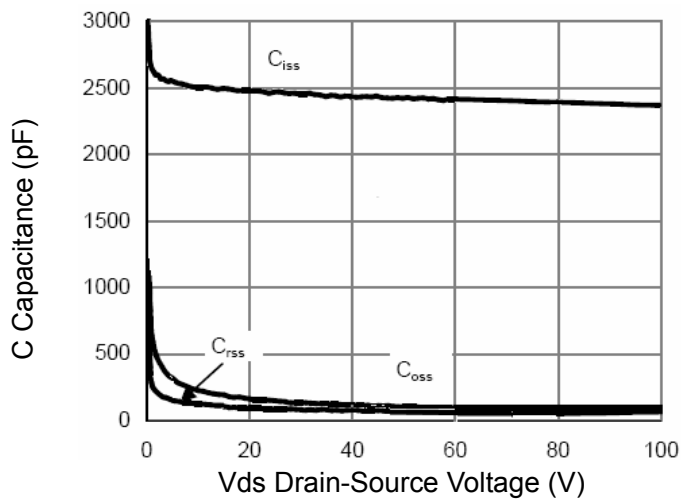


Figure 7 Capacitance vs Vds

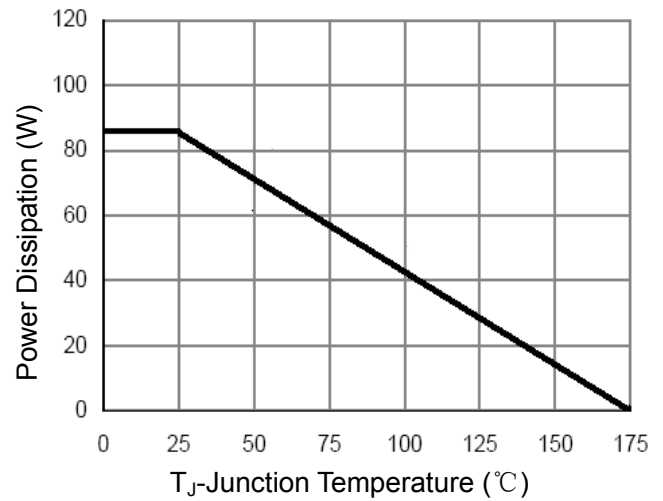


Figure 9 Power De-rating

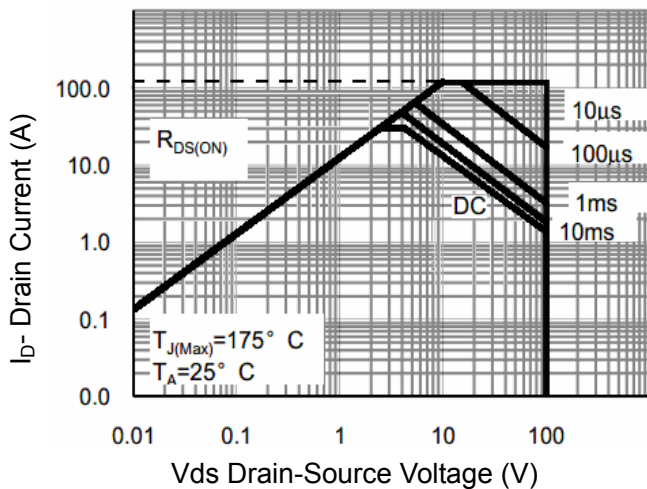


Figure 8 Safe Operation Area

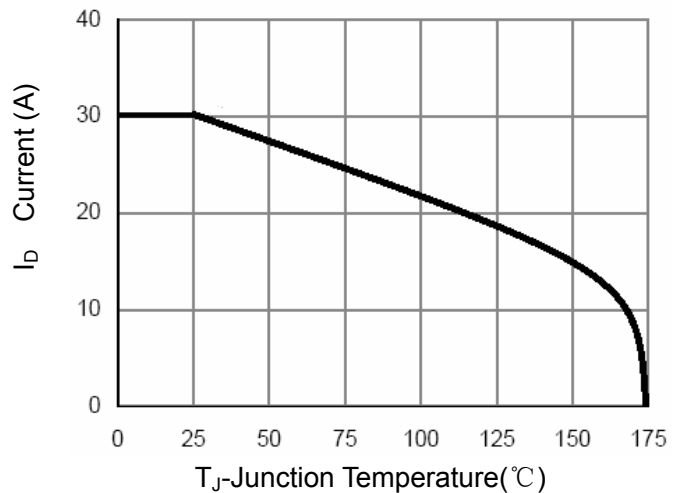


Figure 10 ID Current- Junction Temperature

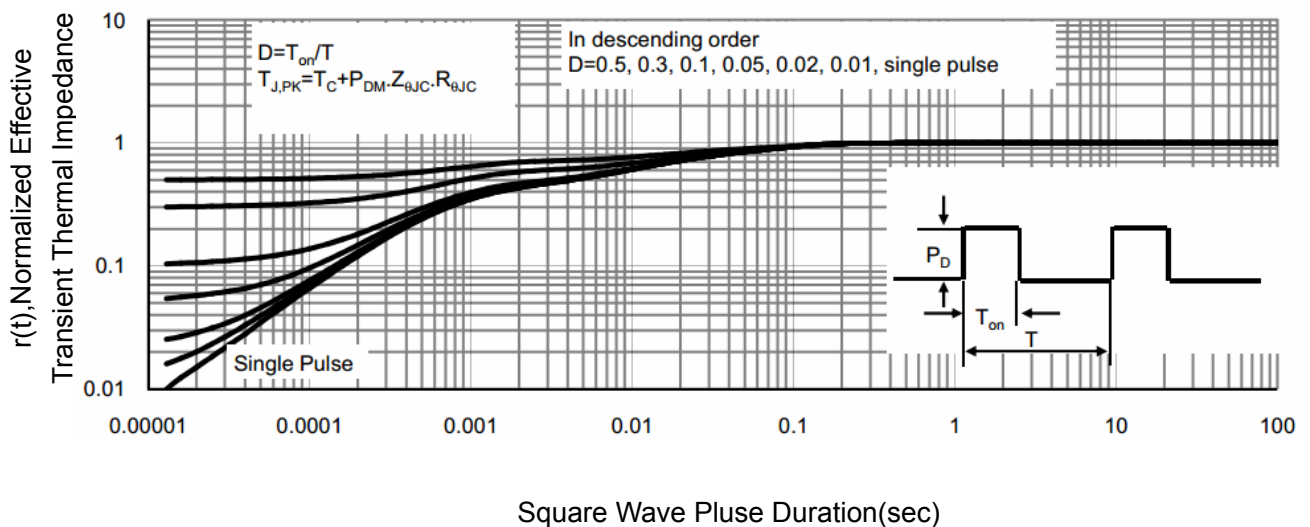
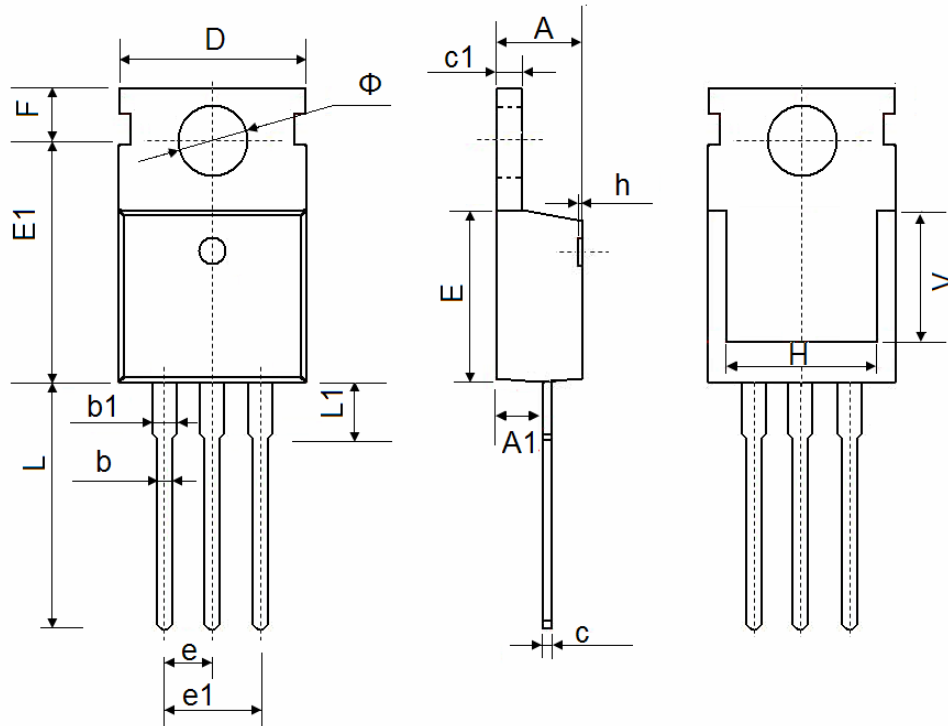


Figure 11 Normalized Maximum Transient Thermal Impedance

TO-220-3L Package Information


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.400	4.600	0.173	0.181
A1	2.250	2.550	0.089	0.100
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.330	0.650	0.013	0.026
c1	1.200	1.400	0.047	0.055
D	9.910	10.250	0.390	0.404
E	8.9500	9.750	0.352	0.384
E1	12.650	12.950	0.498	0.510
e	2.540 TYP.		0.100 TYP.	
e1	4.980	5.180	0.196	0.204
F	2.650	2.950	0.104	0.116
H	7.900	8.100	0.311	0.319
h	0.000	0.300	0.000	0.012
L	12.900	13.400	0.508	0.528
L1	2.850	3.250	0.112	0.128
V	7.500 REF.		0.295 REF.	
Φ	3.400	3.800	0.134	0.150