


Pin-Code für Splitting-Kabel PIN Code for Splitting Cable Code PIN pour cable pour le splitting

Datenblatt
Data Sheet
Fiche technique

© PHOENIX CONTACT - 07/2005

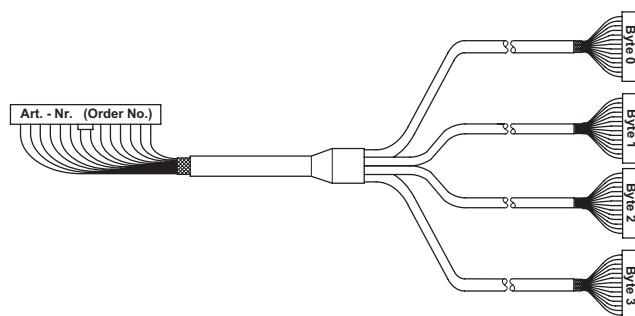

Aderzahl Number of Wires Nombre de fils	FLK 14	FLK 50	Aderfarbe	Wire Color	Couleur du fil	
Byte 0	FLK 14	1	3	schwarz	black	noir (BK)
		2	4	braun	brown	marron (BN)
	14-polig	3	5	rot	red	rouge (RD)
	14-pos.	4	6	orange	orange	orange (OG)
	14 pôles	5	7	gelb	yellow	jaune (YE)
		6	8	grün	green	vert (GN)
		7	9	blau	blue	bleu (BU)
		8	10	violett	violet	violet (VT)
		9	1	grau	gray	gris (GY)
		10	11	weiß	white	blanc (WH)
		11	2	weiß-schwarz	white-black	blanc-noir (WH/BK)
		12	12	weiß-braun	white-brown	blanc-marron (WH/BN)
Byte 1	FLK 14	1	15	schwarz	black	noir (BK)
		2	16	braun	brown	marron (BN)
	14-polig	3	17	rot	red	rouge (RD)
	14-pos.	4	18	orange	orange	orange (OG)
	14 pôles	5	19	gelb	yellow	jaune (YE)
		6	20	grün	green	vert (GN)
		7	21	blau	blue	bleu (BU)
		8	22	violett	violet	violet (VT)
		9	13	grau	gray	gris (GY)
		10	23	weiß	white	blanc (WH)
		11	14	weiß-schwarz	white-black	blanc-noir (WH/BK)
		12	24	weiß-braun	white-brown	blanc-marron (WH/BN)
Byte 2	FLK 14	1	27	schwarz	black	noir (BK)
		2	28	braun	brown	marron (BN)
	14-polig	3	29	rot	red	rouge (RD)
	14-pos.	4	30	orange	orange	orange (OG)
	14 pôles	5	31	gelb	yellow	jaune (YE)
		6	32	grün	green	vert (GN)
		7	33	blau	blue	bleu (BU)
		8	34	violett	violet	violet (VT)
		9	25	grau	gray	gris (GY)
		10	35	weiß	white	blanc (WH)
		11	26	weiß-schwarz	white-black	blanc-noir (WH/BK)
		12	36	weiß-braun	white-brown	blanc-marron (WH/BN)
Byte 3	FLK 14	1	39	schwarz	black	noir (BK)
		2	40	braun	brown	marron (BN)
	14-polig	3	41	rot	red	rouge (RD)
	14-pos.	4	42	orange	orange	orange (OG)
	14 pôles	5	43	gelb	yellow	jaune (YE)
		6	44	grün	green	vert (GN)
		7	45	blau	blue	bleu (BU)
		8	46	violett	violet	violet (VT)
		9	37	grau	gray	gris (GY)
		10	47	weiß	white	blanc (WH)
		11	38	weiß-schwarz	white-black	blanc-noir (WH/BK)
		12	48	weiß-braun	white-brown	blanc-marron (WH/BN)