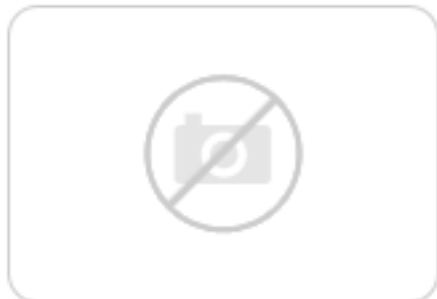


1520237-1 Product Details

[Share](#) [Print](#) [Email](#)


 **Active**
 [View 3D PDF](#)

Power Toggle Switches

7320K2=BULK PACK 8TOGGLE SW

1520237-1 

TE Internal Number: 1520237-1

Product Highlights [View All](#)

- Double Pole - Single Throw Configuration (Pole-Throw)
- Toggle Length = 17.30 mm
- Toggle Style = Baton
- Bushing Length = 8.74 mm
- Termination Type = Screw-In Terminal

[Pricing & Availability](#)
[Request Sample](#)
[Add to My Part List](#)
[Buy Product through Distributor](#)
[Feedback](#)

Documents

Features

Compliance

Please Note:

Use the Product Drawing for all design activity

Electrical Characteristics

UL/CSA 125V Current Rating (A)	16
UL/CSA 250V Current Rating (A)	8
UL/CSA 125V Horse Power Rating (hp)	1.00

Termination Features

Termination Type	Screw-In Terminal
------------------	-------------------

Dimensions

Toggle Length (mm [in])	17.30 [0.681]
Bushing Length (mm [in])	8.74 [0.344]



Housing Features

Toggle Style	Baton
--------------	-------

Configuration Features

Configuration (Pole-Throw)	Double Pole - Single Throw
----------------------------	----------------------------

Industry Standards

RoHS/ELV Compliance 	RoHS compliant, ELV compliant
Lead Free Solder Processes 	Not reviewed for lead free solder process
RoHS/ELV Compliance History	Always was RoHS compliant

Other

Brand	Alcoswitch
-------	------------

Related Products

Not quite the product you're looking for?

[Find Similar Products](#)

[View Part in Product Feature Selector](#)

[Check for Tooling](#)

Corporate Information

[About TE](#)
[Investors](#)
[News Room](#)
[Supplier Portal](#)
[Careers](#)
[Terms & Conditions](#)
[Privacy Policy](#)
[Global Accessibility Statement](#)

Quick Links

[Distributor Inventory](#)
[Product Cross Reference](#)
[Documents & Drawings](#)
[Product Compliance Support Center](#)
[Site Map](#)

Customer Support

[Email or Chat With Us](#)
[Find a Phone Number](#)
[Knowledge Base](#)
[Manage Your Account](#)

Keep Me Informed

