



4

3

2

1

ACCESSORIES
(NOT PART OF STANDARD ASSEMBLY)FLANGE GASKET,
PLAIN
10-40450-()FLANGE GASKET,
SHIELDING
10-40450-(SHELL SIZE)S

35508-462

REVISIONS

ZONE	LTR	DESCRIPTION	DATE	APPROVED
	A8	REDRAWN SAME SIZE; REVISED & STANDARDIZED (SEE CHANGE NOTICE) ECN: 55525-42	11-30-72 LAMBRECHT	<i>[Signature]</i>
	A9	WAS 11SL (MS OR SM COL) ECN: 55525-119	2-4-74 SHEPLER	<i>[Signature]</i>
	B	(MFG); ADD. 9-3895 (PROCESS SPEC); REV STAMPING NOTE ECN 57216-4	12-22-75 <i>[Signature]</i>	<i>[Signature]</i>
	C	(MFG); REV STAMPING NOTE 9 ECN 57738-3	5-19-76 BWIKER	<i>[Signature]</i>
	D	(CL II) SEE ECN 91396	8/9/02	<i>[Signature]</i>



STAMP "AMPHENOL" &
SM NO. PER 9-2811
EXAMPLE:

AMPHENOL SM3102R-18-54P

OR

STAMP "AMPHENOL" &
DATE CODE (9-3895) &
MS NO. PER 9-2811
EXAMPLE:

AMPHENOL-7539 JMS3102R-18-1P

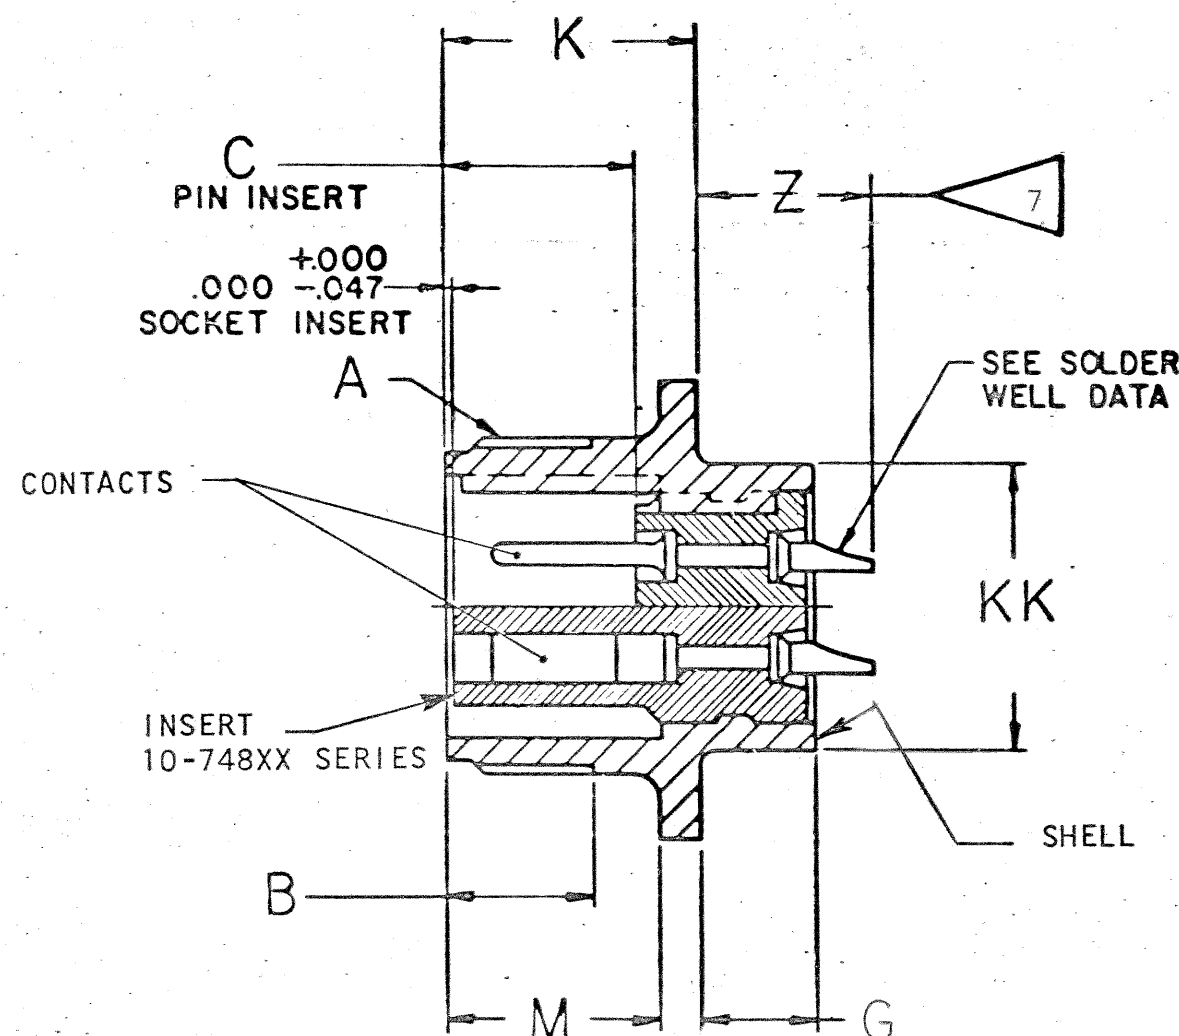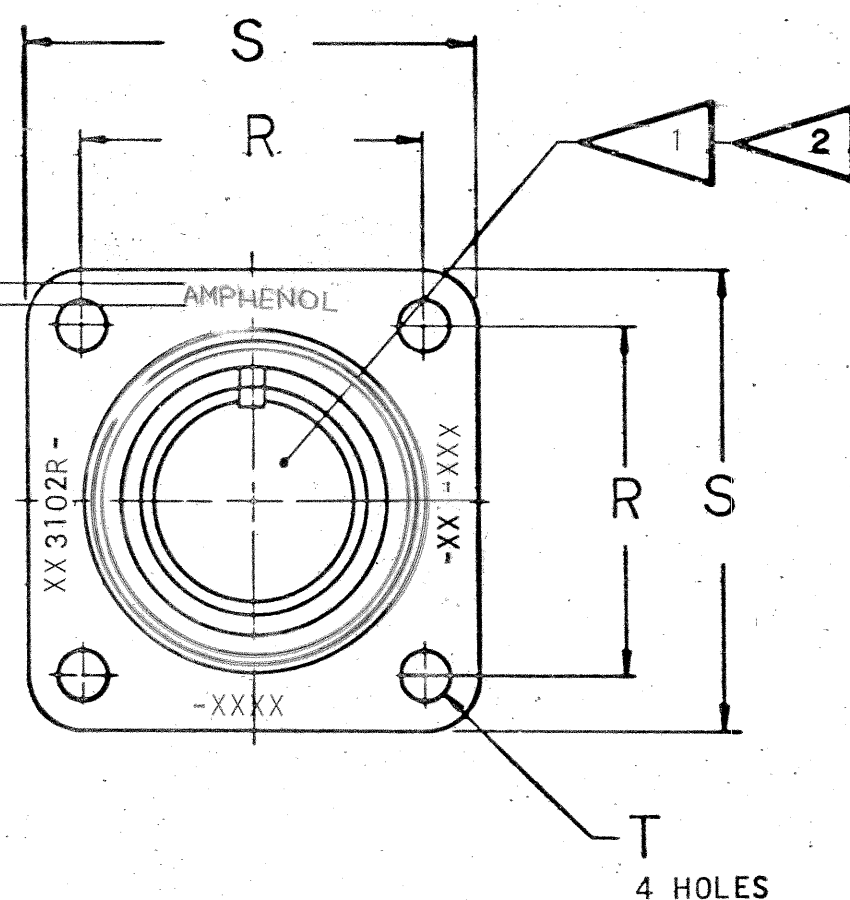CONTACT DATA
(WHERE APPLICABLE)

THERMOCOUPLE		COAXIAL		
MATERIAL	IDENTIFICATION	ARR	CABLE	Z ₁ DIM MAX
CHROMEL	WHITE			
ALUMEL	GREEN			
IRON	BLACK			
CONSTANTAN	YELLOW			
INSERT ARRANGEMENTS CONTAINING THERMOCOUPLE OR COAXIAL CONTACTS MUST HAVE SUCH CONTACTS ASSEMBLED INTO THE INSERT IN PROPER LOCATIONS AS SPECIFIED BY APPLICABLE DWG L-11908-() THRU L-11948-().				

STANDARD SOLDER WELL DATA

CONTACT SIZE	0	4	8	12	16	8 FOR NO. 6 WIRE	12 FOR NO. 10 WIRE	16 FOR NO. 12 WIRE	12	16
WELL DIA	.469 ⁺ .005 -.003	.332 ⁺ .005 -.003	.209 ⁺ .004 -.002	.116 ⁺ .004 -.002	.078 ⁺ .004 -.002	.250±.003	.152 ⁺ .004 -.002	.109 ⁺ .004 -.001	.125 ⁺ .004 -.002	.094 ⁺ .004 -.002
WELL DEPTH	+.031 -.000	.625	.625	.500	.375	.250	.250	.188	.250	.188

SPECIAL SOLDER WELL DATA

THERMOCOUPLE

FIND NO.

QTY REQD

CODE IDENT

PART NUMBER

DESCRIPTION

NOTE REF

PARTS LIST

UNLESS OTHERWISE SPECIFIED

LINEAR DIMENSIONS ARE IN INCHES.
TOLERANCES: .XXX ± .010,
.XX ± .03, .X ± .1, ANGLES ± 2°.
OTHER STANDARDS PER 9-3800
AND MIL-D-1000. NOTE REF

SIGNATURES

DATES

PREPARED

CHECKED

MATERIAL

APPROVED

APPROVED

The Bendix Corporation
Electrical Components Division
Sidney, New YorkTITLE: CONNECTOR,
ELECTRICAL RECEPTACLE,
TYPE MS-R, SM-R() FB

SIZE

CODE IDENT NO.

C

77820

10-190208 THRU
10-190250

SCALE

NONE

SEE PARTS LIST

REF 0-131208/50

SHEET 1 OF 2

SEE SHEET 2

NOTES:

USE OF THIS DOCUMENT IS UNLIMITED. DOCUMENTS REFERENCED HEREON CONTAIN LIMITED RIGHTS DATA.

NEXT ASSEMBLY

TAB.

4

3

2

1

ASSEMBLY NUMBER	9 MS OR SM NO:		SHELL	A THREAD (PLATED) CLASS 2A	B MIN FULL THD	C ±.031	G +.000 -.010	K +.020 -.010	M +.010 -.000	R ±.005	S	T DIA +.004 -.002	Z MAX	KK DIA +.010 -.000
10-190208	3102R	- 8S	10-37262- 8	.500-28 UNEF	.391	.484	.297	.672	.562	.594	.875	.120	.472	.375
10-190210		-10S	-10	.625-24 UNEF						.719	1.000			.500
10-190211		-10SL	-11	.625-24 UNEF						.719	1.000			.625
10-190212		-12S	-12	.750-20 UNEF	.450					.812	1.094			
10-190213		-12	-13	.750-20 UNEF	.625	.672	.484	.860	.750	.812	1.094		.722	
10-190214		-14S	-14	.875-20 UNEF	.450	.484	.297	.672	.562	.906	1.188		.472	.750
10-190215		-14	-15	.875-20 UNEF	.625	.672	.484	.860	.750	.906	1.188		.722	.750
10-190216		-16S	-16	1.000-20 UNEF	.450	.484	.297	.672	.562	.969	1.281		.472	.875
10-190217		-16	-17	1.000-20 UNEF	.625	.672	.484	.860	.750	.969	1.281		.722	.875
10-190218		-18	-18	1.125-18 UNEF			.453	.891		1.062	1.375		.691	1.000
10-190220		-20	-20	1.250-18 UNEF						1.156	1.500			1.125
10-190222		-22	-22	1.375-18 UNEF						1.250	1.625			1.250
10-190224		-24	-24	1.500-18 UNEF				.953	.812	1.375	1.750	.147	.628	1.375
10-190228		-28	-28	1.750-18 UNS				.953	.812	1.562	2.000	.147	.628	1.625
10-190232		-32	-32	2.000-18 UNS			.438	1.031	.875	1.750	2.250	.173	.550	1.875
10-190236		-36	-36	2.250-16 UN			.438			1.938	2.500			2.062
10-190240		-40	-40	2.500-16 UN			.438			2.188	2.750			2.312
10-190241/50			NOT AVAILABLE											

5

8. UNITS ILLUSTRATED MEET THE MATERIAL & FINISH REQUIREMENTS OF MIL-C-5015.
7. INCREASE "Z" DIMENSION BY .312 FOR SIZE "0" CONTACT ONLY.
6. FOR COMPONENT PART NUMBERS, QUANTITIES AND RELEASE STATUS OF THE DESIRED UNIT, SEE SEPARATE PARTS LIST.
5. TO COMPLETE ASSEMBLY NUMBER, SM NO., OR MS NO., ADD APPLICABLE INSERT ARRANGEMENT SUFFIX TO BASE NUMBERS LISTED ABOVE. (FOR ALTERNATE ARRANGEMENTS, REFER TO 9-2437).
4. FOR MATING PLUG ASSEMBLIES, SEE DRAWING 10-190608 THRU 10-190650 & OTHERS.
3. SEE WORK ORDER FOR PERMISSIBLE ADDITIONAL OR ALTERNATE STAMPING.
2. INSERTS AND CONTACTS ARE NOT REMOVABLE.
1. FOR CONTACT SIZE, SPACING & SERVICE RATING, SEE DRAWINGS MS33680 THRU MS33693 & L-11908-() THRU L-11948-().

10. CONNECTOR ASSEMBLIES 10-190208-50/-99 THRU 10-190250-50/-99, EXCEPT THOSE LISTED IN NOTE 9, ARE STAMPED WITH SM NO.
9. CONNECTOR ASSEMBLIES 10-190208-1/-49 THRU 10-190250-1/-49 AND 10-190236-52, 10-190240-56 AND 10-190240-62 ARE STAMPED WITH MS NO.

NOTES:

SIZE	CODE IDENT NO.	10-190208 THRU
C	77820	10-190250
SCALE	WT	REF
REV	SYM	SHEET 2

A8	A9	B	C	D															
----	----	---	---	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

TAB.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[MS3102R10SL-3P](#) [MS3102R10SL-4P](#) [MS3102R14S-2P](#) [MS3102R14S-2S](#) [MS3102R14S-5P](#) [MS3102R14S-5S](#)
[MS3102R14S-6P](#) [MS3102R14S-6S](#) [MS3102R14S-7P](#) [MS3102R14S-7S](#) [MS3102R16-10P](#) [MS3102R16-10S](#)
[MS3102R16-11P](#) [MS3102R16-11S](#) [MS3102R16S-1P](#) [MS3102R16S-8P](#) [MS3102R18-10P](#) [MS3102R18-11P](#)
[MS3102R18-1P](#) [MS3102R18-1S](#) [MS3102R18-4P](#) [MS3102R20-15P](#) [MS3102R20-27P](#) [MS3102R20-27S](#)
[MS3102R20-29P](#) [MS3102R20-29S](#) [MS3102R20-4P](#) [MS3102R20-7P](#) [MS3102R22-14P](#) [MS3102R22-22P](#)
[MS3102R22-22S](#) [MS3102R22-2P](#) [MS3102R24-10P](#) [MS3102R24-11P](#) [MS3102R28-21P](#) [MS3102R24-28P](#)
[MS3102R10SL-3S](#) [MS3102R24-12P](#) [MS3102R20-33S](#) [MS3102R20-15S](#) [MS3102R20-8S](#) [MS3102R18-11S](#)
[MS3102R22-19P](#) [MS3102R22-19S](#) [MS3102R22-14S](#) [MS3102R16S-8S](#) [MS3102R20-7S](#) [MS3102R20-17S](#)
[MS3102R18-19P](#) [MS3102R32-7P](#) [MS3102R20-22PW](#) [MS3102R20-8P](#) [MS3102R22-4P](#) [MS3102R22-9P](#)
[MS3102R22-23S](#) [MS3102R36-6P](#) [MS3102R36-6S](#) [MS3102R18-1SW](#) [MS3102R16-10PX](#) [MS3102R12S-4P](#)
[MS3102R14S-9P](#) [MS3102R14S-9S](#) [MS3102R16-12P](#) [MS3102R18-12P](#) [MS3102R18-13S](#) [MS3102R18-3P](#)
[MS3102R18-8S](#) [MS3102R18-9P](#) [MS3102R18-9S](#) [MS3102R20-11P](#) [MS3102R20-14P](#) [MS3102R20-16P](#)
[MS3102R20-18P](#) [MS3102R20-19P](#) [MS3102R20-19SW](#) [MS3102R20-19SY](#) [MS3102R20-22P](#) [MS3102R20-22S](#)
[MS3102R22-1S](#) [MS3102R22-23P](#) [MS3102R24-21S](#) [MS3102R24-22P](#) [MS3102R24-7P](#) [MS3102R28-11P](#)
[MS3102R28-12S](#) [MS3102R28-15P](#) [MS3102R28-15S](#) [MS3102R28-6P](#) [MS3102R32-15P](#) [MS3102R32-15S](#)
[MS3102R32-17P](#) [MS3102R32-17S](#) [MS3102R32-7S](#) [MS3102R36-10P](#) [MS3102R36-5P](#) [MS3102R24-10S](#)
[MS3102R14S-7PX](#) [MS3102R18-12SW](#) [MS3102R20-11S](#) [MS3102R20-18PW](#)