


Wire Wound Type Common Mode Filter




- 1.High common mode impedance at high frequency cause excellent noise suppression performance.
- 2.WBA0805D series realizes small size and low profile. 2.0x1.2x1.2 mm.
- 3.100% Lead(Pb) & Halogen-Free and RoHS compliant.

Part Number	Z (Ω)Min	Freq (MHz)	Rdc (Ω) max.	Irms (mA)max.	Rated Volt. (Vdc)max.	IR (MΩ) min.
WBA0805D801PT-HF M	800	100	0.88	300	50	10

MECHANICAL

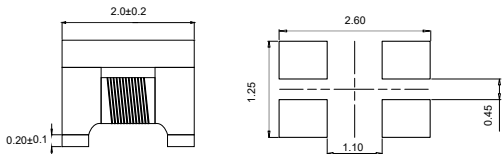


SUGGEST LAYOUT

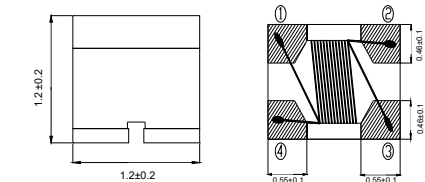


Dimension : mm


SCHEMATICS

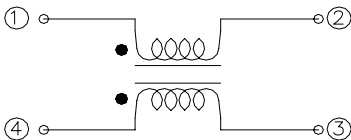

IMPEDEANCE FREQUENCY




TAPING AND PACKING

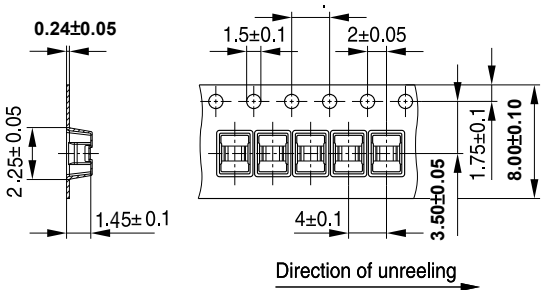

IND1752-J-E

Quantity (pcs):
10000 PCS PER REEL
5 REELS PER CARTON
50000PCS PER CARTON

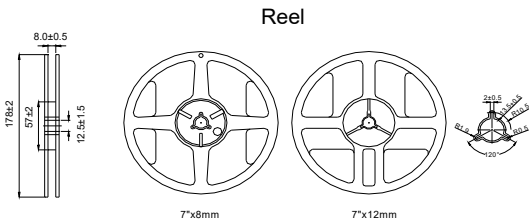

Dimensions in mm