

SPECIFICATION FOR APPROVAL

产品承认书

CUSTOMER: _____

CUSTOMER NO. : _____

HSW PART NO. : HSW-H2411SI

10/100M/1000M BASE-T SINGLE PORT 超薄网络

DESCRIPTION: 滤波器

ATTACHMENT:

■ SPECIFICATION

■ SAMPLE Q'TY OF SAMPLES 10 PCS

CUSTOMER APPROVAL
(客户承认章)

HSW APPROVAL
(公司承认章)

SALES BY:

SALES BY:

张静

QA DEPT. :

CHECKED BY:

刘君

ENG. DEPT.:

APPROVAL BY:

贺江

PLEASE REPLY THIS SHEET TO US AFTER SIGNATURE(请签字后回传本页)

深圳市华升微电子有限公司


TEL:86-755- 33272179/33270812 FAX:86-755-61174076

www.h1102.com sales@h1102.com hswdz01@163.com 技术支持: tech@h1102.com

- Designed To Meet IEEE 802.3 & ANSI X 3.263 Standards.
- Lead-Free&Designed To Meet RoHS Requirement.
- 10/100/1000 Base-T, Surface Mount Type, Open Header .
- Operating temperature range: 0 to +70

Electrical Specifications @25°C									
Part Number	OCL(uH Min) @100KHz,0.1V	Turns Ratio (±3%)	Insertion Loss (dB Max)	Return Loss (dB Min)		Cross talk (dB Min)		CMRR (dB Min)	HI-POT (Vrms)
			0.5-100MHz	0.5-40MHz	40.1-100MHz	0.5-40MHz	40.1-100MHz	0.5-100MHz	
H2411SI	350	1CT:1CT	-1.1	-18	-12+20*log(f/80)	-35	-33+20*log(f/50)	-30	1500

MECHANICAL

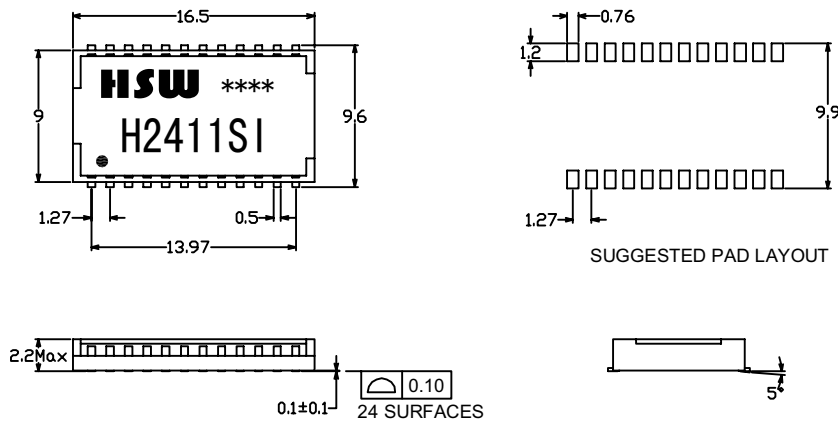

Unless otherwise specified all tolerances are:±0.25 in mm

SCHEMATICS

