

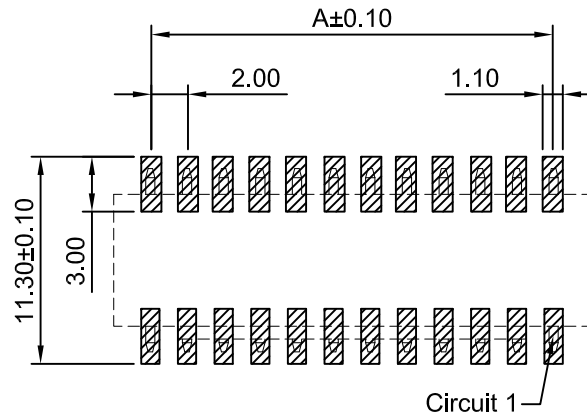
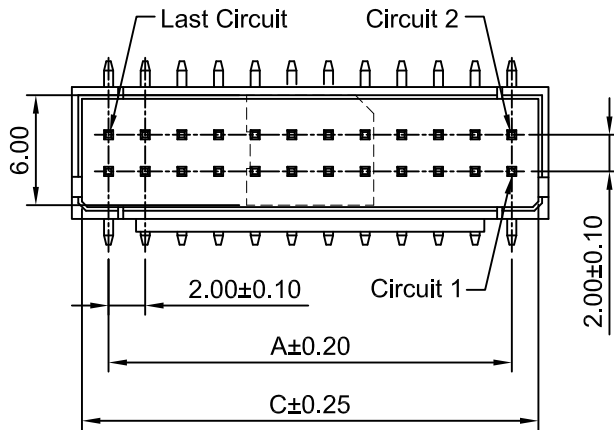


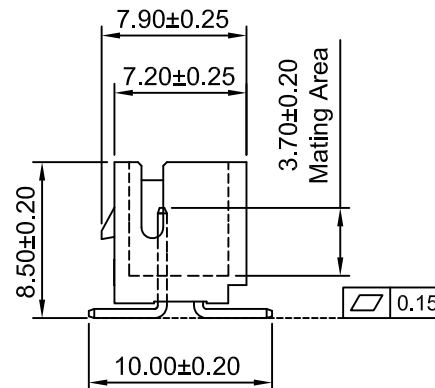

P.C.B LAYOUT
TOLERANCE:±0.05

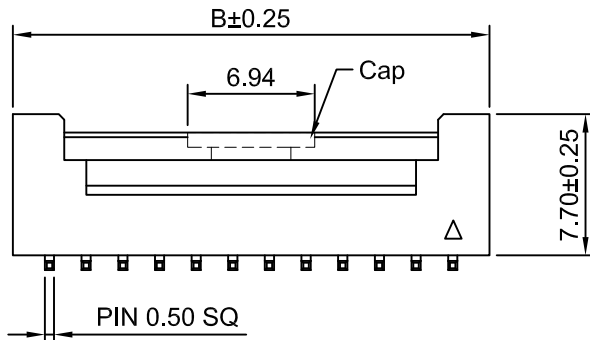

Ordering Information:

A2008WV-S-2xXP - **
1 2

1.Part No.

2.Material:

(Blank):Nylon 6T,UL94V-0

46:Nylon 46,UL94V-0(Natural)

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 6T,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x2P	2.00	6.00	4.90	2x12P	22.00	26.00	24.90
2x3P	4.00	8.00	6.90	2x13P	24.00	28.00	26.90
2x4P	6.00	10.00	8.90	2x14P	26.00	30.00	28.90
2x5P	8.00	12.00	10.90	2x15P	28.00	32.00	30.90
2x6P	10.00	14.00	12.90	2x16P	30.00	34.00	32.90
2x7P	12.00	16.00	14.90	2x17P	32.00	36.00	34.90
2x8P	14.00	18.00	16.90	2x18P	34.00	38.00	36.90
2x9P	16.00	20.00	18.90	2x19P	36.00	40.00	38.90
2x10P	18.00	22.00	20.90	2x20P	38.00	42.00	40.90
2x11P	20.00	24.00	22.90	2x30P	58.00	62.00	60.90

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

A5	CHANGE THE DRAWING	2023.07.11
A4	CHANGE THE DRAWING	2022.03.02
A3	CHANGE THE DRAWING	2021.12.18
A2	ADD THE SIZE	2020.08.04
A1	CHANGE THE DRAWING	2019.12.23
A0	NEW RELEASE	2013.12.21
REV	DESCRIPTION	DATE

Unit	Scale	Sheet
mm	3:1	1 of 1
DRWN	CHKD	APPR
Chengbiao Ye	Diankui Wan	Jack Yin
General Tolerances		THIRD ANGLE PROJECTION
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°		

TITLE		
2.00mm PITCH 180° DUAL ROW WAFER - SMD TYPE		
DRAWING NO		REV
A2008WV-S-2xXP		A5