


Data sheet | Item number: 706-100/615-200

Connection cable; 15-pole; with solder pin; Female connector; open-ended;
Length: 2 m; Conductor cross-section: 0.25 mm²



www.wago.com/706-100/615-200

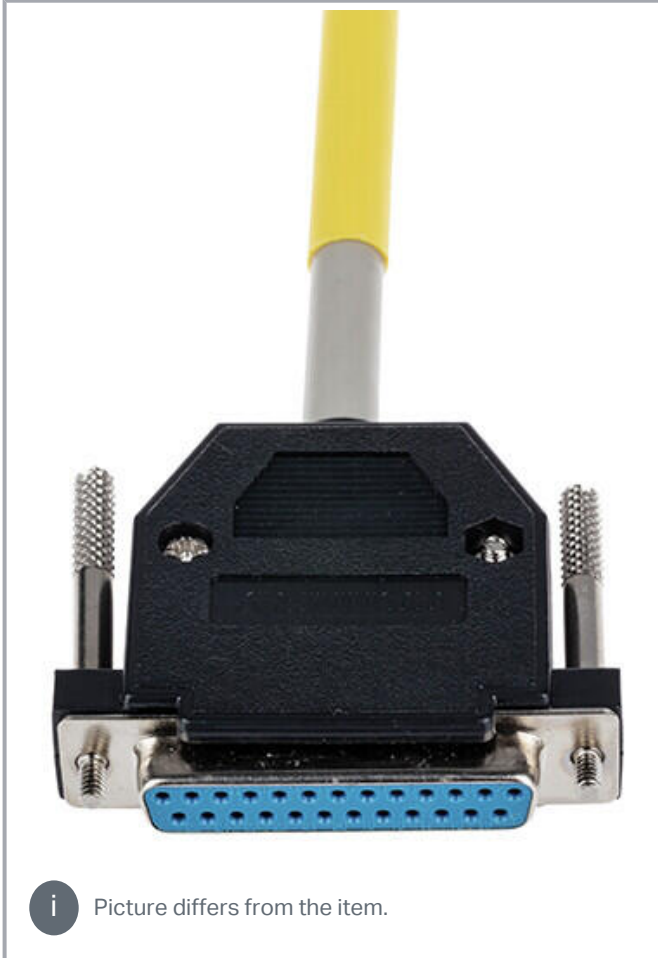

i Picture differs from the item.

| Color coding acc. to DIN VDE 47100 | | 15 poles female Sub-D connector | |
|---------------------------------------|--|---------------------------------|--|
| | | Pin number | |
| White | | 1 | |
| Brown | | 2 | |
| Green | | 3 | |
| Yellow | | 4 | |
| Grey | | 5 | |
| Pink | | 6 | |
| Blue | | 7 | |
| Red | | 8 | |
| Black | | 9 | |
| Violet | | 10 | |
| Grey-Pink | | 11 | |
| Red-Blue | | 12 | |
| White-Green | | 13 | |
| Brown-Green | | 14 | |
| White-Yellow | | 15 | |
| Shield | | Connected to Sub-D | |

Data Notes

Note When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Electrical data

Operating voltage \leq AC/DC 35 V
Current per wire (max.) 2 A

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Connection data

| | |
|------------|-------------------|
| Cable type | LiYCY |
| Color code | per DIN VDE 47100 |

Connection 1

| | |
|--------------------|---------------------------------|
| Connector | D-subminiature female connector |
| Pole number 1 | 15 |
| Connection type 1 | System |
| Wire cross-section | 0.25 mm ² |

Connection 2

| | |
|-------------------|------------|
| Connector 2 | open-ended |
| Connection type 2 | open-ended |

Physical data

| | |
|--------------|-----|
| Cable length | 2 m |
|--------------|-----|

Material data

| | |
|--------|-------|
| Weight | 1.1 g |
|--------|-------|

Environmental requirements

| | |
|---------------------------------|----------------|
| Ambient temperature (operation) | -20 ... +50 °C |
|---------------------------------|----------------|

Commercial data

| | |
|-----------------------|---------------|
| ETIM 8.0 | EC001855 |
| ETIM 7.0 | EC001855 |
| PU (SPU) | 1 pcs |
| Packaging type | box |
| GTIN | 4050821835622 |
| Customs tariff number | 85444290900 |

Environmental Product Compliance

| | |
|------------------------|-------------------------|
| RoHS Compliance Status | Compliant, No Exemption |
|------------------------|-------------------------|

Subject to changes. Please also observe the further product documentation!



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-100/615-200

URL

Download

Connection cable; 15-pole; with solder pin; Female connector; open-ended; Length: 2 m; Conductor cross-section: 0.25 mm²

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.