


Data sheet | Item number: 706-4769/408-300

System cable; for Rockwell Compact Logix; 16 analog inputs; Length: 3 m;
Conductor cross-section: 0.25 mm²



www.wago.com/706-4769/408-300

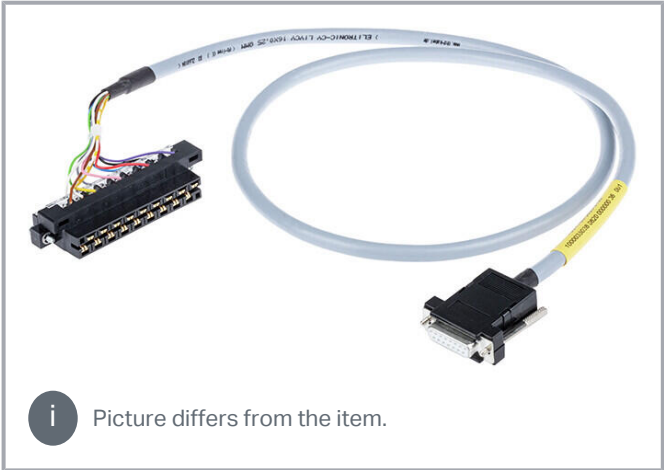

Interface connector 1			
Color coding acc. to DIN VDE 47100 Cable 1; Channel 0-7	25 poles Sub-D connector		PLC connector
	Pin number	Wiring	Pin number
White	1	IN0+	1
Brown	2	IN0-	9
Green	3	IN1+	2
Yellow	4	IN1-	9
Grey	5	IN2+	3
Pink	6	IN2-	9
Blue	7	IN3+	4
Red	8	IN3-	9
Black	9	IN4+	5
Violet	10	IN4-	9
Grey-Pink	11	IN5+	6
Red-Blue	12	IN5-	9
White-Green	13	IN6+	7
Brown-Green	14	IN6-	9
White-Yellow	15	IN7+	8
Yellow-Brown	16	IN7-	9
White-Grey	17	nc	nc
Grey-Brown	18	nc	nc
White-Pink	19	nc	nc
Pink-Brown	20	nc	nc
White-Blue	21	nc	nc
Brown-Blue	22	nc	nc
White-Red	23	nc	nc
Brown-Red	24	nc	nc
White-Black	25	nc	nc
Shield		Connected to Sub-D	

Interface connector 2			
Color coding acc. to DIN VDE 47100 Cable 1; Channel 8-15	25 poles Sub-D connector		PLC connector
	Pin number	Wiring	Pin number
White	1	IN8+	11
Brown	2	IN8-	10
Green	3	IN9+	12
Yellow	4	IN9-	10
Grey	5	IN10+	13
Pink	6	IN10-	10
Blue	7	IN11+	14
Red	8	IN11-	10
Black	9	IN12+	15
Violet	10	IN12-	10
Grey-Pink	11	IN13+	16
Red-Blue	12	IN13-	10
White-Green	13	IN14+	17
Brown-Green	14	IN14-	10
White-Yellow	15	IN15+	18
Yellow-Brown	16	IN15-	10
White-Grey	17	nc	nc
Grey-Brown	18	nc	nc
White-Pink	19	nc	nc
Pink-Brown	20	nc	nc
White-Blue	21	nc	nc
Brown-Blue	22	nc	nc
White-Red	23	nc	nc
Brown-Red	24	nc	nc
White-Black	25	nc	nc
Shield		Connected to Sub-D	

Data
Notes

Note

When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Electrical data

Inputs/outputs	16 analog inputs
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	2 A

Compatibility

Rockwell

Rockwell Compact Logix	1769 - IF16C
------------------------	--------------

Connection data

Cable type	LIYCY
Color code	per DIN VDE 47100

Connection 1

Connector	D-subminiature female connector
Pole number 1	25
Connection type 1	System
Wire cross-section	0.25 mm ²

Connection 2

Connector 2	D-subminiature female connector
Pole number 2	25
Connection type 2	System

Connection 3

Connector 3	Rockwell RTBN18
Pole number 3	18
Connection type 3	System

Physical data

Cable length	3 m
--------------	-----

Subject to changes. Please also observe the further product documentation!



Material data

Weight	1332 g
--------	--------

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Commercial data

ETIM 8.0	EC000237
ETIM 7.0	EC000237
PU (SPU)	1 pcs
Packaging type	bag
Country of origin	FR
GTIN	4055143984867
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Documentation

System Description

WAGO System Wiring, Selection Guide	pdf	Download
This guide will help you select the appropriate interface modules and system cables for the controller you are using.	545.9 kB	

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-4769/408-300	URL	Download
System cable; for Rockwell Compact Logix; 16 analog inputs; Length: 3 m; Conductor cross-section: 0.25 mm ²		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.