



**Data sheet | Item number: 769-605/004-000**

1-conductor male connector; CAGE CLAMP®; 4 mm²; Pin spacing 5 mm; 5-pole; Feedthrough flange; 4,00 mm²; gray

[www.wago.com/769-605/004-000](http://www.wago.com/769-605/004-000)

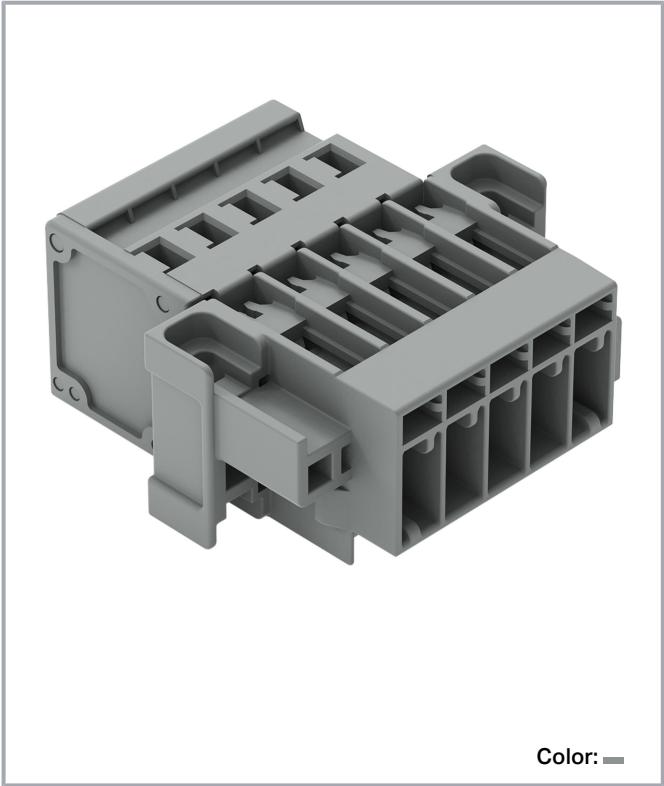

Color:

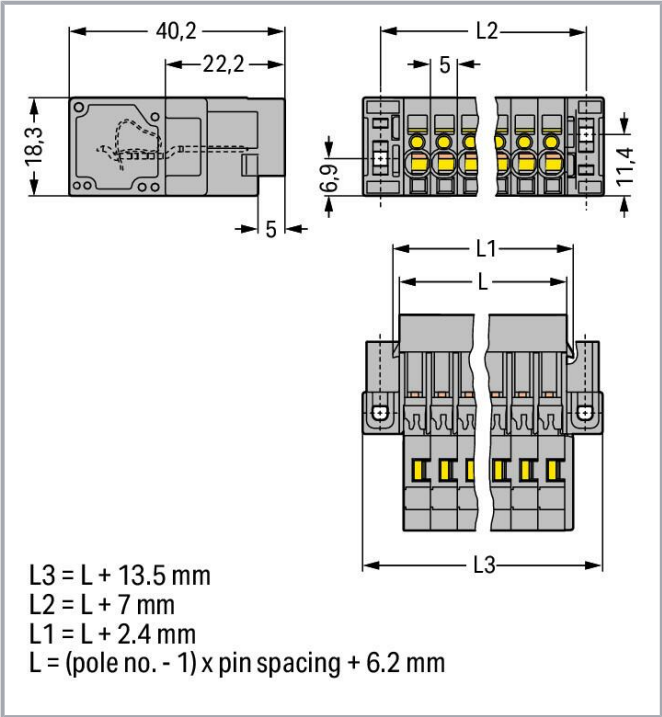

**Data**

**Electrical data**

**Ratings per IEC/EN**

|                               |                                                           |
|-------------------------------|-----------------------------------------------------------|
| Nominal voltage (III/3)       | 500 V                                                     |
| Rated impulse voltage (III/3) | 6 kV                                                      |
| Rated current                 | 32 A                                                      |
| Legend (ratings)              | (III / 3) ≙ Overvoltage category III / Pollution degree 3 |

**Connection data**

|                            |   |
|----------------------------|---|
| Connection points          | 5 |
| Total number of potentials | 5 |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Connection 1

|                                 |                                   |
|---------------------------------|-----------------------------------|
| Connection technology           | CAGE CLAMP®                       |
| Actuation type                  | Operating tool                    |
| Connectable conductor materials | Copper                            |
| Nominal cross-section           | 4 mm² / 12 AWG                    |
| Solid conductor                 | 0.08 ... 4 mm² / 28 ... 12 AWG    |
| Fine-stranded conductor         | 0.08 ... 4 mm² / 28 ... 12 AWG    |
| Strip length                    | 8 ... 9 mm / 0.31 ... 0.35 inches |
| Pole number                     | 5                                 |
| Wiring direction                | Front-entry wiring                |

## Physical data

|                         |                        |
|-------------------------|------------------------|
| Pin spacing             | 5 mm / 0.197 inches    |
| Width                   | 39.7 mm / 1.563 inches |
| Height from the surface | 18.3 mm / 0.72 inches  |
| Depth                   | 40.2 mm / 1.583 inches |

## Mechanical Data

|                                                        |                    |
|--------------------------------------------------------|--------------------|
| Variable coding                                        | Yes                |
| Direct ground contact to DIN-rail/drilled hole/housing | No                 |
| Mounting type                                          | Feedthrough flange |
| Anti-rotation protection                               | Yes                |

## Plug-in connection

|                                      |                     |
|--------------------------------------|---------------------|
| Contact type (pluggable connector)   | Male connector/plug |
| Connector (connection type)          | for conductor       |
| Mismating protection                 | No                  |
| Plugging without loss of pin spacing | No                  |

## Material data

|                      |                                                          |
|----------------------|----------------------------------------------------------|
| Note (material data) | Information on material specifications can be found here |
| Color                | gray                                                     |
| Material group       | I                                                        |
| Insulation material  | Polyamide (PA66)                                         |

Subject to changes. Please also observe the further product documentation!



|                             |          |
|-----------------------------|----------|
| Flammability class per UL94 | V0       |
| Fire load                   | 0.451 MJ |
| Weight                      | 16.4 g   |

## Environmental requirements

|                                  |                 |
|----------------------------------|-----------------|
| Processing temperature           | -35 ... +85 °C  |
| Continuous operating temperature | -60 ... +105 °C |

## Commercial data

|                       |                   |
|-----------------------|-------------------|
| Product Group         | 18 (X-COM-System) |
| eCl@ss 10.0           | 27-14-11-06       |
| eCl@ss 9.0            | 27-14-11-06       |
| ETIM 8.0              | EC001284          |
| ETIM 7.0              | EC001284          |
| PU (SPU)              | 25 pcs            |
| Packaging type        | Box               |
| Country of origin     | PL                |
| GTIN                  | 4044918521116     |
| Customs tariff number | 85366930000       |

## Environmental Product Compliance

|                        |                         |
|------------------------|-------------------------|
| RoHS Compliance Status | Compliant, No Exemption |
|------------------------|-------------------------|

## Approvals / Certificates

### General approvals

| Logo                                                                               | Approval                        | Additional Approval Text | Certificate name |
|------------------------------------------------------------------------------------|---------------------------------|--------------------------|------------------|
|  | CCA<br>DEKRA Certification B.V. | EN 60947                 | NTR NL-7626      |
|                                                                                    | CCA<br>DEKRA Certification B.V. | IEC 61984                | NL-47799 /A1     |
|  | CCA<br>DEKRA Certification B.V. | EN 61984                 | 2190419.02       |
|                                                                                    | CSA                             | C22.2                    | 1101144          |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



CSA Group



KEMA/KEUR  
DEKRA Certification B.V.

EN 60947

2190419.01



UL  
Underwriters Laboratories Inc.

UL 1977

E 45171



UR  
Underwriters Laboratories Inc.

UL 1059

E45172

## Declarations of conformity and manufacturer's declarations

| Logo                                                                               | Approval                                           | Additional Approval Text | Certificate name |
|------------------------------------------------------------------------------------|----------------------------------------------------|--------------------------|------------------|
|   | EU-Declaration of Conformity<br>WAGO GmbH & Co. KG | -                        | -                |
|  | UK-Declaration of Conformity<br>WAGO GmbH & Co. KG | -                        | -                |

## Approvals for marine applications

| Logo                                                                               | Approval                                         | Additional Approval Text | Certificate name |
|------------------------------------------------------------------------------------|--------------------------------------------------|--------------------------|------------------|
|  | DNV GL<br>Det Norske Veritas, Germanischer Lloyd | -                        | TAE00001V2       |

## Counterpart



## Item no.769-105

1-conductor female connector; CAGE CLAMP®; 4 mm<sup>2</sup>; Pin spacing 5 mm; 5-pole; coding finger; 4,00 mm<sup>2</sup>; gray

[www.wago.com/769-105](http://www.wago.com/769-105)

## Item no.769-105/021-000

[www.wago.com/769-105](http://www.wago.com/769-105)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

1-conductor female connector; CAGE CLAMP®; 4 mm²; Pin spacing 5 mm; 5-pole; coding finger; Lateral locking levers; 4,00 mm²; gray /021-000

**Item no. 769-125**

2-conductor female connector; CAGE CLAMP®; 4 mm²; Pin spacing 5 mm; 5-pole; coding finger; 4,00 mm²; gray

[www.wago.com/769-125](http://www.wago.com/769-125)

**Optional accessories****Insulation stop**

Insulation stop

**Item no.: 769-470**

Insulation stop; 0.08 - 0.2 mm² "s" (0.14 mm² "f-st"); 5 pieces/strip; white

[www.wago.com/769-470](http://www.wago.com/769-470)

**Item no.: 769-471**

Insulation stop; 0.25 - 0.5 mm²; 5 pieces/strip; light gray

[www.wago.com/769-471](http://www.wago.com/769-471)

**Item no.: 769-472**

Insulation stop; 0.75 - 1 mm²; 5 pieces/strip; dark gray

[www.wago.com/769-472](http://www.wago.com/769-472)

**Protective warning marker**

Cover

**Item no.: 280-415**

Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

[www.wago.com/280-415](http://www.wago.com/280-415)

**Coding**

Coding

**Item no.: 769-435**

Coding pin; for coding of female plugs; for carrier terminal blocks / male connectors; orange

[www.wago.com/769-435](http://www.wago.com/769-435)

**Marking accessories**

Marking strip

**Item no.: 210-831**

Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white

[www.wago.com/210-831](http://www.wago.com/210-831)

**Item no.: 210-833**

Marking strips; 25 m on roll; 6 mm wide; plain; Self-adhesive; white

[www.wago.com/210-833](http://www.wago.com/210-833)

**Item no.: 210-834**

Marking strips; on reel; 5 mm wide; plain; Self-adhesive; white

[www.wago.com/210-834](http://www.wago.com/210-834)

**Item no.: 210-832**

Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white

[www.wago.com/210-832](http://www.wago.com/210-832)

Marker

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

**Item no.: 248-501**

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

[www.wago.com/248-501](http://www.wago.com/248-501)**Strain relief**

Strain relief

**Item no.: 769-412**

Strain relief plate; for female and male connectors; 1 part; Pin spacing 5 mm; 4- to 5-pole; gray

[www.wago.com/769-412](http://www.wago.com/769-412)**Tool**

Operating tool

**Item no.: 210-490**

Operating tool

[www.wago.com/210-490](http://www.wago.com/210-490)**Item no.: 769-434**

Operating tool; made of insulating material; 1-way; loose; white

[www.wago.com/769-434](http://www.wago.com/769-434)**Ferrule**

Ferrule

**Item no.: 216-101**Ferrule; Sleeve for 0.5 mm<sup>2</sup> / AWG 22; uninsulated; electro-tin plated; silver-colored[www.wago.com/216-101](http://www.wago.com/216-101)**Item no.: 216-104**Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; uninsulated; electro-tin plated; silver-colored[www.wago.com/216-104](http://www.wago.com/216-104)**Item no.: 216-102**Ferrule; Sleeve for 0.75 mm<sup>2</sup> / AWG 20; uninsulated; electro-tin plated; silver-colored[www.wago.com/216-102](http://www.wago.com/216-102)**Item no.: 216-103**Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; uninsulated; electro-tin plated[www.wago.com/216-103](http://www.wago.com/216-103)**Item no.: 216-203**Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; insulated; electro-tin plated; red[www.wago.com/216-203](http://www.wago.com/216-203)**Item no.: 216-206**Ferrule; Sleeve for 2.5 mm<sup>2</sup> / AWG 14; insulated; electro-tin plated; blue[www.wago.com/216-206](http://www.wago.com/216-206)**Item no.: 216-202**Ferrule; Sleeve for 0.75 mm<sup>2</sup> / 18 AWG; insulated; electro-tin plated; gray[www.wago.com/216-202](http://www.wago.com/216-202)**Item no.: 216-204**Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; black[www.wago.com/216-204](http://www.wago.com/216-204)**Item no.: 216-201**Ferrule; Sleeve for 0.5 mm<sup>2</sup> / 20 AWG; insulated; electro-tin plated; white[www.wago.com/216-201](http://www.wago.com/216-201)**Downloads****Documentation****Bid Text**

Subject to changes. Please also observe the further product documentation!

WAGO GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



|                                |             |                |          |
|--------------------------------|-------------|----------------|----------|
| 769-605/004-000<br>X81 - Datei | 2019 Feb 19 | xml<br>3.3 kB  | Download |
| 769-605/004-000<br>doc - Datei | 2017 Oct 4  | doc<br>25.6 kB | Download |
| Additional Information         |             | pdf<br>2.3 MB  | Download |

## CAD/CAE-Data

### CAD data

|                              |     |          |
|------------------------------|-----|----------|
| 2D/3D Models 769-605/004-000 | URL | Download |
|------------------------------|-----|----------|

### CAE data

|                                   |     |          |
|-----------------------------------|-----|----------|
| EPLAN Data Portal 769-605/004-000 | URL | Download |
| WSCAD Universe 769-605/004-000    | URL | Download |
| ZUKEN Portal 769-605/004-000      | URL | Download |
| EPLAN Data Portal 769-605/004-000 | URL | Download |
| WSCAD Universe 769-605/004-000    | URL | Download |

### Asset Administration Shell

|                                            |     |          |
|--------------------------------------------|-----|----------|
| Asset Administration Shell 769-605/004-000 | URL | Download |
|--------------------------------------------|-----|----------|

## Environmental Product Compliance

### Compliance Search

|                                                                                                                                                                     |     |          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----------|
| Environmental Product Compliance 769-605/004-000<br>1-conductor male connector; CAGE CLAMP®; 4 mm²; Pin spacing 5 mm; 5-pole;<br>Feedthrough flange; 4,00 mm²; gray | URL | Download |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----------|


## Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.


### Conductor termination

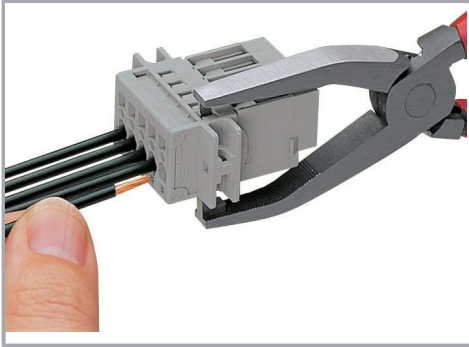

#### Operating tool

Inserting a conductor via operating tool  
(example shows a male connector).

### Marking

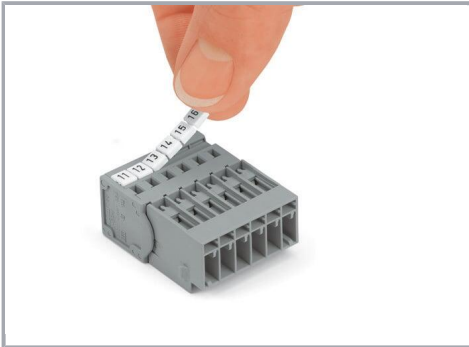

Labeling a male connector with CAGE CLAMP®  
connection via Mini-WSB Quick Markers.

### Product family

#### X-COM

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!