




**Part Number :** [2147531081](#)  
**Product Description :** Micro-Fit 3.0 Male-to-Pigtail Off-the-Shelf (OTS) Cable Assembly, Single Row, 150.00mm Length, Tin (Sn) Plating, 8 Circuits, Black  
**Series Number :** 214753  
**Status :** Active  
**Product Category :** Power and Signal Cable Assemblies

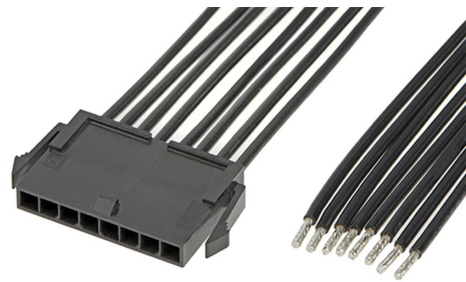


## Documents & Resources

**Drawings**  
[Drawing 2147531081\\_sd.pdf](#)

**3D Models and Design Files**  
[3D Model 2147531081\\_stp.zip](#)

## Product Environment Compliance

### Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

### Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474

## Part Details

### General

Status	Active
Category	Power and Signal Cable Assemblies
Series	214753
Description	Micro-Fit 3.0 Male-to-Pigtail Off-the-Shelf (OTS) Cable Assembly, Single Row, 150.00mm Length, Tin (Sn) Plating, 8 Circuits, Black
Application	Power, Wire-to-Wire
Assembly Configuration	Dual Ended Connectors
Connector to Connector	Micro-Fit 3.0-to-Pigtail
Product Family	Micro-Fit Connector System
Product Name	Micro-Fit 3.0
Type	Discrete Wire Assembly
UPC	193264586257

### Electrical

Current - Maximum per Contact	8.5A
Voltage - Maximum	300V AC/DC

### Physical

Cable Length	150.00mm
Circuits (Loaded)	8
Circuits (maximum)	8
Color - Resin	Black
Gender	Male-Pigtail
Lock to Mating Part	Yes
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Nylon
Net Weight	16.579/g

Number of Rows	1
Overmolded	No
Packaging Type	Bag
Pitch - Mating Interface	3.00mm
Plating min - Mating	1.016µm
Plating min - Termination	1.016µm
Single Ended	Yes
Termination Interface Style	Crimp or Compression
Wire/Cable Type	Discrete Wire, UL 10002
Wire Insulation Diameter	1.85mm max.
Wire Size (AWG)	18

---

## Mates With / Use With

### Mates with Part(s)

Description	Part Number
Micro-Fit 3.0 Single Row Receptacle Housings	<u>43645</u>