

Article No. : 6SL3220-3YE36-0AF0



Figure similar

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Rated data

Input

Number of phases	3 AC	
Line voltage	380 ... 480 V	+10 % -20 %
Line frequency	47 ... 63 Hz	
Rated voltage	400V IEC	480V NEC
Rated current (LO)	70.00 A	61.00 A
Rated current (HO)	62.00 A	54.00 A

Output

Number of phases	3 AC	
Rated voltage	400V IEC	480V NEC¹⁾
Rated power (LO)	37.00 kW	50.00 hp
Rated power (HO)	30.00 kW	40.00 hp
Rated current (LO)	75.00 A	65.00 A
Rated current (HO)	60.00 A	52.00 A
Rated current (IN)	77.00 A	
Max. output current	102.00 A	
Pulse frequency	4 kHz	
Output frequency for vector control	0 ... 200 Hz	
Output frequency for V/f control	0 ... 550 Hz	

Overload capability

Low Overload (LO)	
110% base load current IL for 60 s in a 300 s cycle time	
High Overload (HO)	
150% x base load current IH for 60 s within a 600 s cycle time	

General tech. specifications	
Power factor λ	0.90 ... 0.95
Offset factor $\cos \phi$	0.99
Efficiency η	0.97
Sound pressure level (1m)	70 dB
Power loss ³⁾	1.110 kW
Filter class (integrated)	RFI suppression filter for Category C2
EMC category (with accessories)	Category C2
Safety function "Safe Torque Off"	without SIRIUS device (e.g. via S7-1500F)

Communication

Communication PROFINET, EtherNet/IP


Inputs / outputs

Standard digital inputs	
Number	6
Switching level: 0 → 1	11 V
Switching level: 1 → 0	5 V
Max. inrush current	15 mA
Fail-safe digital inputs	
Number	1
Digital outputs	
Number as relay changeover contact	2
Output (resistive load)	DC 30 V, 5.0 A
Number as transistor	0
Analog / digital inputs	
Number	2 (Differential input)
Resolution	10 bit
Switching threshold as digital input	
0 → 1	4 V
1 → 0	1.6 V
Analog outputs	
Number	1 (Non-isolated output)
PTC/ KTY interface	
1 motor temperature sensor input, sensors that can be connected PTC, KTY and Thermo-Click, accuracy $\pm 5^\circ\text{C}$	

Closed-loop control techniques	
V/f linear / square-law / parameterizable	Yes
V/f with flux current control (FCC)	Yes
V/f ECO linear / square-law	Yes
Sensorless vector control	Yes
Vector control, with sensor	No
Encoderless torque control	No
Torque control, with encoder	No

Article No. : 6SL3220-3YE36-0AF0

Ambient conditions		Mechanical data	
Standard board coating type	Class 3C2, according to IEC 60721-3-3: 2002	Degree of protection	IP20 / UL open type
Cooling	Air cooling using an integrated fan	Frame size	FSD
Cooling air requirement	0.055 m ³ /s (1.942 ft ³ /s)	Net weight	20 kg (44.09 lb)
Installation altitude	1,000 m (3,280.84 ft)	Dimensions	
Ambient temperature		Width	200 mm (7.87 in)
Operation	-20 ... 45 °C (-4 ... 113 °F)	Height	472 mm (18.58 in)
Transport	-40 ... 70 °C (-40 ... 158 °F)	Depth	248 mm (9.76 in)
Storage	-25 ... 55 °C (-13 ... 131 °F)	Standards	
Relative humidity		Compliance with standards	UL, cUL, CE, C-Tick (RCM), EAC, KCC, SEMI F47, REACH
Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible	CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC
Connections			
Signal cable		Converter losses to IEC61800-9-2*	
Conductor cross-section	0.15 ... 1.50 mm ² (AWG 24 ... AWG 16)	Efficiency class	IE2
Line side		Comparison with the reference converter (90% / 100%)	44.8 %
Version	screw-type terminal		
Conductor cross-section	10.00 ... 35.00 mm ² (AWG 8 ... AWG 2)		
Motor end			
Version	Screw-type terminals		
Conductor cross-section	10.00 ... 35.00 mm ² (AWG 8 ... AWG 2)		
DC link (for braking resistor)			
PE connection	Screw-type terminals		
Max. motor cable length			
Shielded	150 m (492.13 ft)		

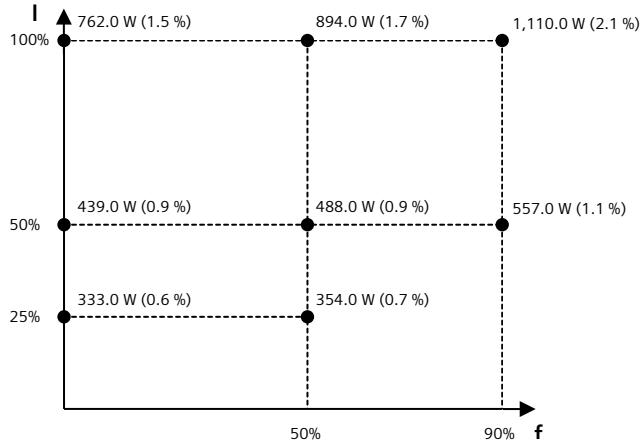

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*calculated values

¹⁾The output current and HP ratings are valid for the voltage range 440V-480V

²⁾Typical value. More information can be found in the element group "Converter losses to IEC 61800-9-2" in this datasheet.

Article No. : 6SL3220-3YE36-0AF0

Operator panel: Intelligent Operator Panel (IOP-2)

Screen	
Display design	LCD color
Screen resolution	320 x 240 Pixel
Mechanical data	
Degree of protection	IP55 / UL type 12
Net weight	0.134 kg (0.30 lb)
Dimensions	
Width	70.00 mm (2.76 in)
Height	106.85 mm (4.21 in)
Depth	19.65 mm (0.77 in)

Ambient conditions	
Ambient temperature	
Operation	0 ... 50 °C (32 ... 122 °F) 55 °C only with door installation kit
Storage	-40 ... 70 °C (-40 ... 158 °F)
Transport	-40 ... 70 °C (-40 ... 158 °F)
Relative humidity at 25°C during	
Max. operation	95 %

Approvals	
Certificate of suitability	CE, cULus, EAC, KCC, RCM