



Extract from the online
catalog

PT 2X1-BE/FM

Order No.: 2920036



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2920036>

Base element to accept a protective plug with diagnostic and status indicator for two signal wires with common reference potential.

Commercial data

GTIN (EAN)	4046356154093
sales group	J210
Pack	10 pcs.
Customs tariff	85369010
Weight/Piece	0.055 KG
Catalog page information	Page 85 (TT-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2007



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Inflammability class acc. to UL 94	V0
Color	black
Ambient temperature (operation)	40 °C ... 85 °C
Mounting type	DIN rail 35 mm
Design	DIN rail module, two-section, divisible

PT 2X1-BE/FM Order No.: 2920036
http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2920036

Degree of protection	IP20
Width	17.70 mm
Height	52.00 mm
Length	89.80 mm
Pitch unit	1 Div.

Connection data

Type of connection	Screw connection
Connection type IN	Screw terminal blocks
Connection type OUT	Screw terminal blocks
Screw thread	M3
Tightening torque	0.8 Nm
Stripping length	8 mm
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

Certificates / Approvals




Certification

GOST, UL Listed

PT 2X1-BE/FM Order No.: 2920036
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2920036>

Diagrams/Drawings

Dimensioned drawing

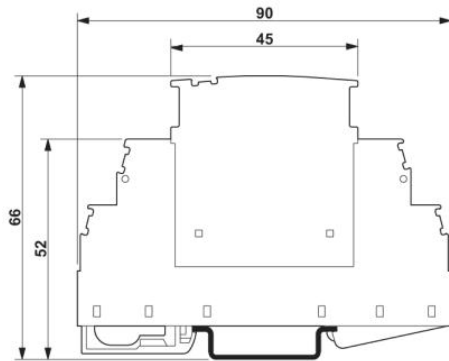

The figure shows the complete module consisting of a base element and connector

PT 2X1-BE/FM Order No.: 2920036
<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2920036>

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;

onlinecomponents.com