
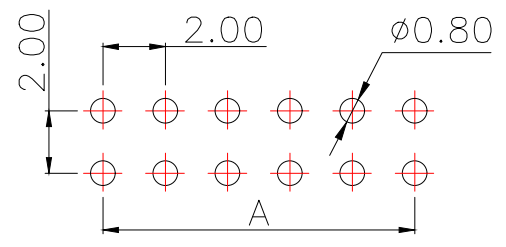



SPECIFICATIONS

Current Rating: 1.5 Amps
 Insulation Resistance: 1000M Ω Min
 Contact Resistance: 20m Ω Max
 Withstanding Voltage: AC 500V
 Operation Temperature: -40 $^{\circ}$ to+105 $^{\circ}$
 Contact Material: Brass
 Standard: PA6T
 Insulator Material: Polyester(UL 94V-0)
 Contact Plating: Gold Flash
 Max.Processing Temp: 240 $^{\circ}$ C for30-60seconds
 (260 $^{\circ}$ C for 5 seconds)

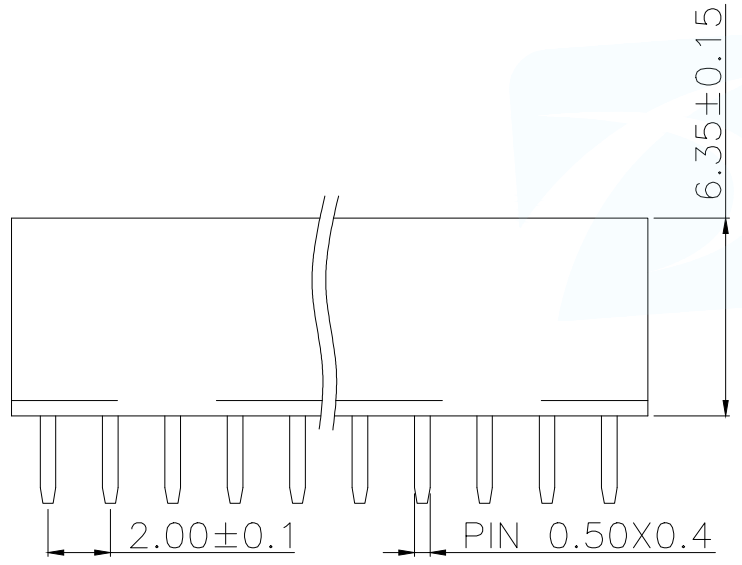


RECOMMEND P.C.B LAYOUT
 PCB TOLERANCE:±0.05 (TOP VIEW)

P/N	PIN	DIM.A	DIM.B
FH2.0-09-01PZS	1	0.00	2.00
FH2.0-09-02PZS	2	2.00	4.00
FH2.0-09-03PZS	3	4.00	6.00
FH2.0-09-04PZS	4	6.00	8.00
FH2.0-09-05PZS	5	8.00	10.00
FH2.0-09-06PZS	6	10.00	12.00
FH2.0-09-07PZS	7	12.00	14.00
FH2.0-09-08PZS	8	14.00	16.00
FH2.0-09-09PZS	9	16.00	18.00
.....
FH2.0-09-40PZS	40	(PIN-1)x2.0	(PIN)x2.0

PART NUMBER DESCRIPTION:

FH2.0-09-NPZS

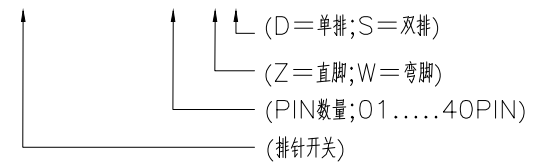

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:2.0FH H6.35 2xnPin 180度 Y型 PC2.8 6T
DECIMALS:	ANGLES:		PAR FH2.0-09-NPZS
X.±0.30	X $^{\circ}$ ±5 $^{\circ}$		DWN
X.X±0.20	X.X $^{\circ}$ ±1 $^{\circ}$		CHKD
X.XX±0.10	X.XX $^{\circ}$ ±0.5 $^{\circ}$	APVD	SCALE N:A UNIT:MM
CUSTOMER COPY		SIZE:A4	UNIT:MM
		SHEET:1F1	REV:A