


## Printed-circuit board connector - FK-MCP 1,5/ 7-ST-3,5 BK - 1800278

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


PCB connector, nominal current: 8 A, number of positions: 7, pitch: 3.5 mm, connection method: Push-in spring connection, color: black, contact surface: Tin



The figure shows a 10-position version of the product

### Your advantages

- ✓ Time saving push-in connection, tools not required
- ✓ Defined contact force ensures that contact remains stable over the long term
- ✓ Intuitive use through colour coded actuation lever
- ✓ Operation and conductor connection from one direction enable integration into front of device
- ✓ Quick and convenient testing using integrated test option

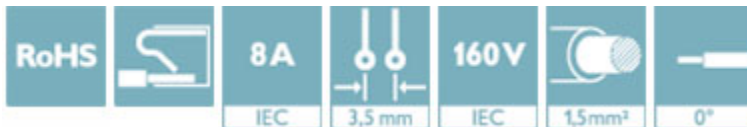

### Key Commercial Data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 1 pc                                                                                                    |
| Minimum order quantity               | 50 pc                                                                                                   |
| GTIN                                 | <br>4 046356 165457 |
| GTIN                                 | 4046356165457                                                                                           |
| Weight per Piece (excluding packing) | 6.480 g                                                                                                 |
| Custom tariff number                 | 85366990                                                                                                |
| Country of origin                    | Germany                                                                                                 |

### Technical data

#### Dimensions

|              |         |
|--------------|---------|
| Length [ l ] | 21 mm   |
| Width [ w ]  | 25.4 mm |
| Height [ h ] | 12.4 mm |

# Printed-circuit board connector - FK-MCP 1,5/ 7-ST-3,5 BK - 1800278

## Technical data

### Dimensions

|             |        |
|-------------|--------|
| Pitch       | 3.5 mm |
| Dimension a | 21 mm  |

### General

|                                  |                           |
|----------------------------------|---------------------------|
| Range of articles                | FK-MCP 1,5/...-ST         |
| Number of positions              | 7                         |
| Connection method                | Push-in spring connection |
| Rated voltage (III/3)            | 160 V                     |
| Connection in acc. with standard | EN-VDE                    |
| Nominal current $I_N$            | 8 A                       |
| Nominal cross section            | 1.5 mm <sup>2</sup>       |
| Stripping length                 | 9 mm                      |

### Connection data

|                                                                            |                      |
|----------------------------------------------------------------------------|----------------------|
| Conductor cross section solid min.                                         | 0.14 mm <sup>2</sup> |
| Conductor cross section solid max.                                         | 1.5 mm <sup>2</sup>  |
| Conductor cross section flexible min.                                      | 0.14 mm <sup>2</sup> |
| Conductor cross section flexible max.                                      | 1.5 mm <sup>2</sup>  |
| Conductor cross section flexible, with ferrule without plastic sleeve min. | 0.25 mm <sup>2</sup> |
| Conductor cross section flexible, with ferrule without plastic sleeve max. | 1.5 mm <sup>2</sup>  |
| Conductor cross section flexible, with ferrule with plastic sleeve min.    | 0.25 mm <sup>2</sup> |
| Conductor cross section flexible, with ferrule with plastic sleeve max.    | 0.5 mm <sup>2</sup>  |
| Conductor cross section AWG min.                                           | 26                   |
| Conductor cross section AWG max.                                           | 16                   |
| Minimum AWG according to UL/CUL                                            | 28                   |
| Maximum AWG according to UL/CUL                                            | 16                   |

### Specifications for ferrules

|                                                              |                                                              |
|--------------------------------------------------------------|--------------------------------------------------------------|
| Recommended crimping pliers                                  | 1212034 CRIMPFOX 6                                           |
| Ferrules without insulating collar, according to DIN 46228-1 | Cross section: 0.25 mm <sup>2</sup> ; Length: 7 mm           |
|                                                              | Cross section: 0.34 mm <sup>2</sup> ; Length: 7 mm           |
|                                                              | Cross section: 0.5 mm <sup>2</sup> ; Length: 8 mm ... 10 mm  |
|                                                              | Cross section: 0.75 mm <sup>2</sup> ; Length: 8 mm ... 10 mm |
|                                                              | Cross section: 1 mm <sup>2</sup> ; Length: 8 mm ... 10 mm    |
|                                                              | Cross section: 1.5 mm <sup>2</sup> ; Length: 10 mm           |

### Standards and Regulations

|                                  |        |
|----------------------------------|--------|
| Connection in acc. with standard | EN-VDE |
|                                  | CUL    |

## Printed-circuit board connector - FK-MCP 1,5/ 7-ST-3,5 BK - 1800278

### Technical data

#### Environmental Product Compliance

|            |                                                         |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27260700 |
| eCl@ss 4.1 | 27260700 |
| eCl@ss 5.0 | 27260700 |
| eCl@ss 5.1 | 27260700 |
| eCl@ss 6.0 | 27260700 |
| eCl@ss 7.0 | 27440309 |
| eCl@ss 8.0 | 27440309 |
| eCl@ss 9.0 | 27440309 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002638 |
| ETIM 5.0 | EC002638 |
| ETIM 6.0 | EC002638 |
| ETIM 7.0 | EC002638 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211810 |
| UNSPSC 7.0901 | 39121409 |
| UNSPSC 11     | 39121409 |
| UNSPSC 12.01  | 39121409 |
| UNSPSC 13.2   | 39121409 |

### Approvals

#### Approvals

#### Approvals

IECEE CB Scheme / VDE Gutachten mit Fertigungsüberwachung / EAC / cULus Recognized

#### Ex Approvals

## Printed-circuit board connector - FK-MCP 1,5/ 7-ST-3,5 BK - 1800278

### Approvals

#### Approval details

|                    |                                                                                   |                                                           |                |
|--------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------|----------------|
| IECEE CB Scheme    |  | <a href="http://www.iecee.org/">http://www.iecee.org/</a> | DE1-60987-B1B2 |
| Nominal voltage UN | 160 V                                                                             |                                                           |                |
| Nominal current IN | 8 A                                                                               |                                                           |                |
| mm²/AWG/kcmil      | 0.2-1.5                                                                           |                                                           |                |

|                                            |                                                                                   |                                                                                                                                                                                                                |          |
|--------------------------------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| VDE Gutachten mit<br>Fertigungsüberwachung |  | <a href="http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx">http://www2.vde.com/de/Institut/Online-Service/<br/>VDE-gepruefteProdukte/Seiten/Online-Suche.aspx</a> | 40011723 |
| Nominal voltage UN                         | 160 V                                                                             |                                                                                                                                                                                                                |          |
| Nominal current IN                         | 8 A                                                                               |                                                                                                                                                                                                                |          |
| mm²/AWG/kcmil                              | 0.2-1.5                                                                           |                                                                                                                                                                                                                |          |

|     |                                                                                     |         |  |
|-----|-------------------------------------------------------------------------------------|---------|--|
| EAC |  | B.01742 |  |
|-----|-------------------------------------------------------------------------------------|---------|--|

|                    |                                                                                     |                                                                                                                                                       |                 |
|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| cULus Recognized   |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E60425-19920306 |
| Nominal voltage UN | 300 V                                                                               |                                                                                                                                                       |                 |
| Nominal current IN | 8 A                                                                                 |                                                                                                                                                       |                 |
| mm²/AWG/kcmil      | 28-16                                                                               |                                                                                                                                                       |                 |