

Data sheet

3SE6605-2BA

magnetically operated switch contact block rectangular large 25 x 88 mm, contact elements 1 NO+1 NC, with 3 m cable, required solenoid 3SE6704-2BA or with increased operating distance 8 mm 3SE6701-2BA.



product brand name	SIRIUS
product designation	Magnetically operated switch
design of the product	Rectangular sensor unit
product type designation	3SE66
suitability for use safety-related circuits	Yes

General technical data

product function	
• positive opening	No
• cross-circuit/short-circuit recognition	Yes
type of voltage of the operating voltage	AC/DC
protection class IP	IP67
shock resistance according to IEC 60068-2-27	Sinusoidal half-wave 30g / 11 ms
reference code according to IEC 81346-2	S
Substance Prohibitance (Date)	07/01/2006
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8
height of the sensor	13 mm
length of the sensor	88 mm
width of the sensor	25 mm
material of the active sensor area	plastic

Ambient conditions

ambient temperature during operation	-25 ... +70 °C
--------------------------------------	----------------

Control circuit/ Control

type of voltage	AC/DC
operating voltage rated value	100 V
operational current rated value	400 mA
operating power rated value	10 W
number of NC contacts for auxiliary contacts	1
number of NO contacts for auxiliary contacts	1

Enclosure

design of the housing	block
material of the enclosure	plastic
material of cable sheath	PVC

Actuator

design of the actuating element	magnet
---------------------------------	--------

Display

evaluation unit required	yes
--------------------------	-----

Contact

circuit principle	reed switches
switching frequency	5 Hz

assured operating distance OFF	15 mm
assured operating distance ON	5 mm
design of the switching function	NC contact and NO contact
Installation/ mounting/ dimensions	
fastening method	screw fixing
Connections/ Terminals	
type of electrical connection	cable
wire length	3 m
Inputs/ Outputs	
type of switching output	Reed contacts
Safety related data	
category according to EN 954-1	4
ISO 13849	
performance level (PL) according to EN ISO 13849-1	e
IEC 61508	
Safety Integrity Level (SIL) according to IEC 61508	3

Approvals Certificates

General Product Approval

EMV



[Confirmation](#)



Functional Safety

other

[Miscellaneous](#)

[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SE6605-2BA>

Cax online generator

<http://support.automation.siemens.com/WW/CAxorder/default.aspx?lang=en&mlfb=3SE6605-2BA>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SE6605-2BA>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE6605-2BA&lang=en

BK = Black	→	13
BU = Blue	→	14
WH = White	→	21
BN = Brown	→	22

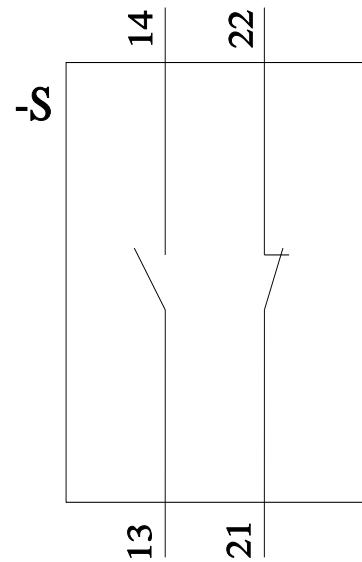

last modified:

3/11/2024 