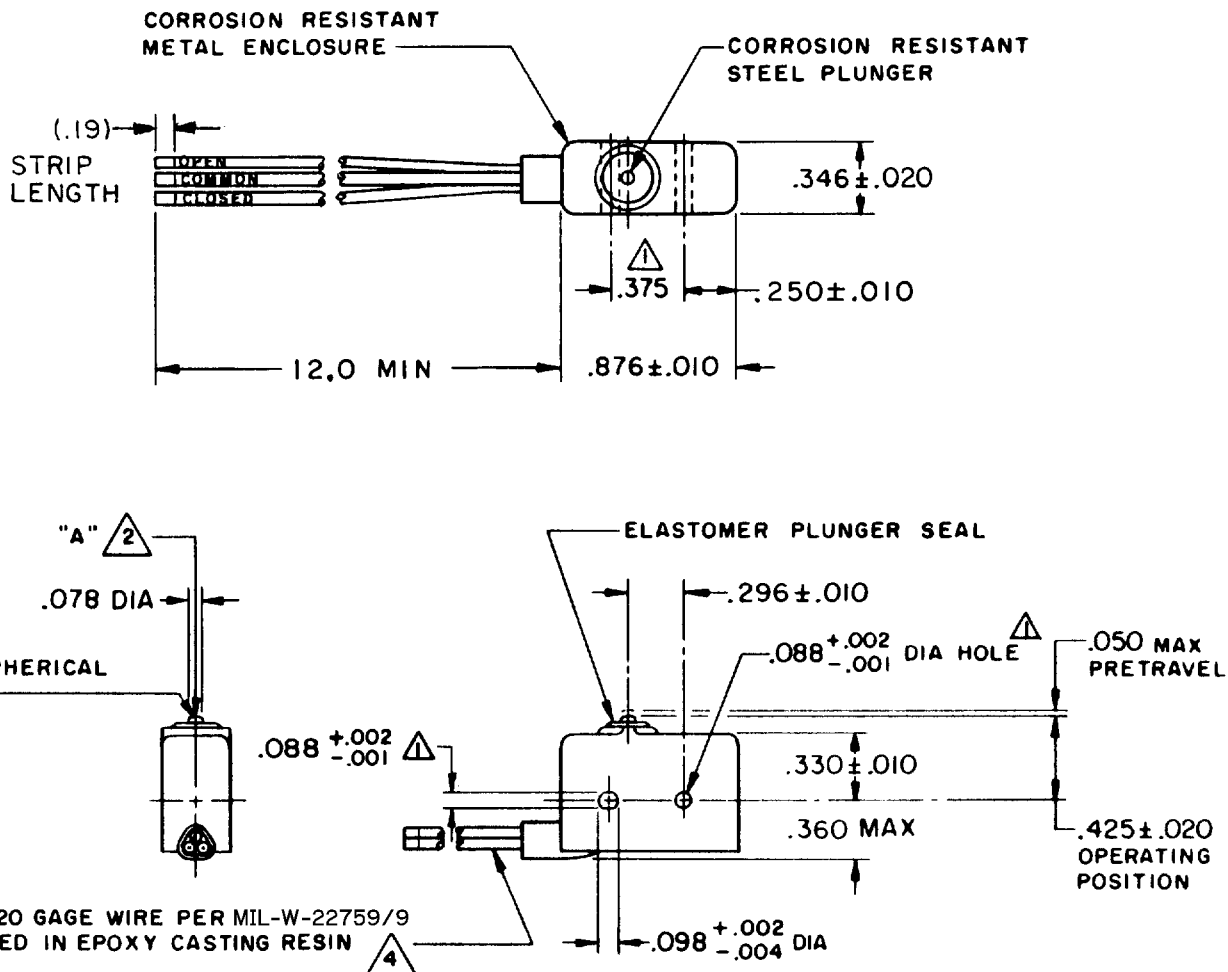


**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

5SE218

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — — 5-17 OZ

RELEASE FORCE — — — — 4 OZ MIN

RELEASE TRAVEL — — — — .004 MIN

DIFFERENTIAL TRAVEL — — — .004 MAX

OVERTRAVEL — — — — .003 MIN

ELECTRICAL DATA**CONTACT ARRANGEMENT**
S P D T250 VAC — — — — — 5 AMP
30 VOLTS DC RATINGINDUCTIVE — — — — SEA LEVEL — — — 3 AMP
50,000 FT — — — 2.5 AMP
RESISTIVE — — — — SEA LEVEL — — — 5 AMP
50,000 FT — — — 5 AMP
MAXIMUM INRUSH — — — — — 24 AMP**SCALE FULL**

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES**TOLERANCES ARE:**ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT

3

CATALOG LISTING

5SE218

PAGE 1 OF 1

MISSUE
7

REPLACES

SR 11927

RELEASE NO.

CHECK

27 JULY 65

27 JULY 65

27 JULY 65

27 JULY 65

27 JULY 65

27 JULY 65

27 JULY 65

27 JULY 65

27 JULY 65

27 JULY 65

27 JULY 65

FORMTEK

DRAWN

M B F

27 JULY 65