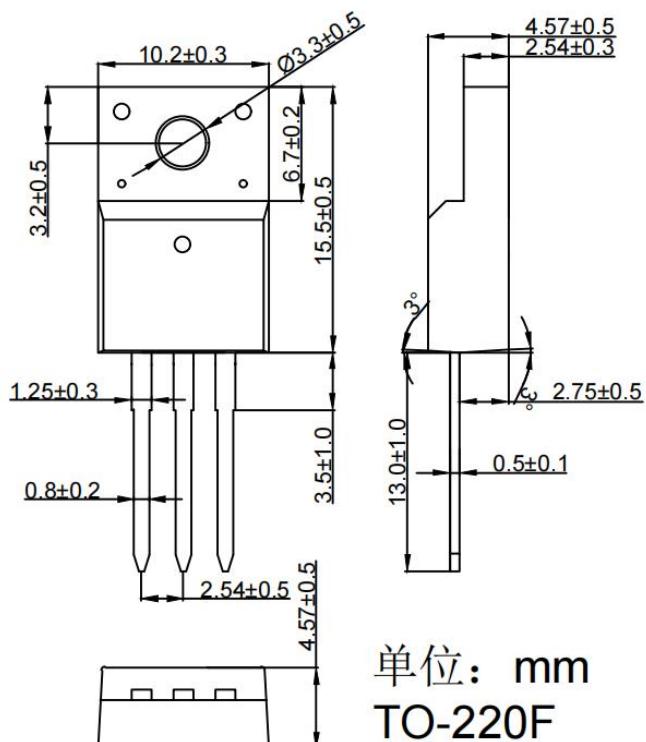
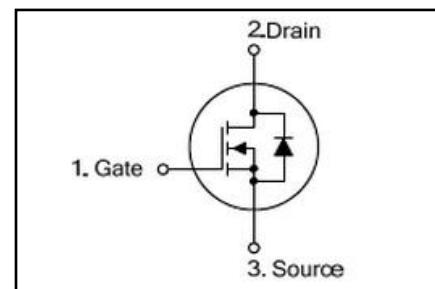
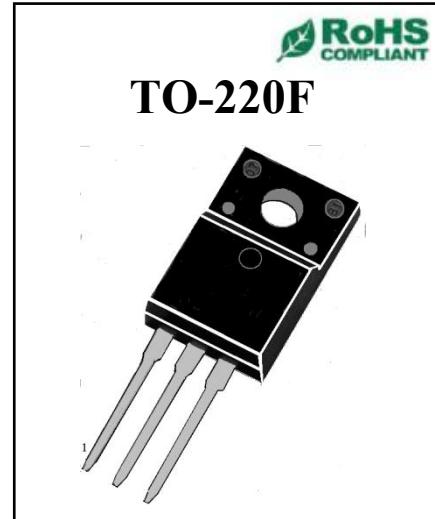


◆ Features:

- ◆ Very Low FOM $R_{DS(on)}$
低内阻
- ◆ %100 avalanche tested
%100 雪崩能量测试
- ◆ RoHS compliant
RoHS 认证
- ◆ Improved dv/dt capability, high ruggedness
提高 dv/dt 能力, 高耐用性

◆ Applications

- ◆ High efficiency switch mode power supplies
高效率开关电源
- ◆ Power factor correction
功率因数校正
- ◆ Electronic lamp ballast
电子整流器

**TO-220F**

单位: mm
TO-220F



OSPF65R650

650V super-junction Power MOSFET

<http://www.osen.net.cn>

◆ Absolute Maximum Ratings (Tc=25°C)

Symbol	Parameters	Ratings		Unit
V _{DSS}	Drain-Source Voltage 漏源电压	650		V
V _{GS}	Gate-Source Voltage-Continuous 栅源电压	±30		V
I _D	Drain Current-Continuous (Note 2) 漏极持续电流	7		A
I _{DM}	Drain Current-Single Plused (Note 1) 漏极单次脉冲电流	22.5		A
P _D	Power Dissipation (Note 2) 功率损耗	28		W
T _j	Max.Operating junction temperature 最大结温	150		°C

Symbol	Parameters	Min	Typ	Max	Units	Conditions
Static Characteristics						
B _{VDS}	Drain-Source Breakdown VoltageCurrent (Note 1) 漏极击穿电压	650	--	--	V	I _D =250μA, V _{GS} =0V, T _j =25°C
V _{GS(th)}	Gate Threshold Voltage 栅极开启电压	2.0	--	4.0	V	V _{DS} =V _{GS} , I _D =250μA
R _{DS(on)}	Drain-Source On-Resistance 漏源导通电阻	--	0.55	0.65	Ω	V _{GS} =10V, I _D =3.5A
I _{GSS}	Gate-Body Leakage Current 栅极漏电流	--	--	±100	nA	V _{GS} =±30V, V _{DS} =0
I _{DSS}	Zero Gate Voltage Drain Current 零栅极电压漏极电流	--	--	1	μA	V _{DS} =650V, V _{GS} =0
Switching Characteristics						



OSPF65R650

650V super-junction Power MOSFET

T _{d(on)}	Turn-On Delay Time 开启延迟时间	--	20	--	ns	V _{DS} =300V, I _D =3.5A R _G =25Ω
T _r	Rise Time 上升时间	--	10	--	ns	
T _{d(off)}	Turn-Off Delay Time 关闭延迟时间	--	25	--	ns	
T _f	Fall Time 下降时间	--	25	--	ns	
Q _g	Total Gate Charge 栅极总电荷	--	10	--	nC	V _{DS} =480V, V _{GS} =10V I _D =3.5A
Q _{gs}	Gate-Source Charge 栅源极电荷	--	4.0	--	nC	
Q _{gd}	Gate-Drain Charge 栅漏极电荷	--	5.0	--	nC	
Dynamic Characteristics						

C _{iss}	Input Capacitance 输入电容	--	500	--	pF	V _{DS} =50V, V _{GS} =0 f=1MHz
C _{oss}	Output Capacitance 输出电容	--	45	--	pF	
C _{rss}	Reverse Transfer Capacitance 反向传输电容	--	3	--	pF	
I _S	Continuous Drain-Source Diode Forward Current 二极管导通正向持续电流	--	--	7	A	
V _{SD}	Diode Forward On-Voltage 二极管正向导通电压	--	--	1.3	V	I _S =3.5A, V _{GS} =0
R _{th(j-c)}	Thermal Resistance, Junction to Case 结到外壳的热阻	--	--	4.46	°C/W	

Note 1: Repetitive Rating : Pulse width limited by maximum junction temperature

Note 2: Pulse test: PW <= 300us , duty cycle <= 2%.