



Load disconnector 3LD3, Iu 25 A Main switch 3-pole + N Rated operating capacity at AC-23 A at 400V 9.0kW Front plate mounting Basic switch with Central hole mounting 22.5mm Toggle drive black 48x48 mm with auxiliary switch 1OE + 1S

Model	
product brand name	SENTRON
product designation	Switch disconnector
design of the product	Main switch
display version for switch position indicator manual operation	1 ON - 0 OFF
type of switch	front mounted
design of the actuating element	selector switch
color of the actuating element	black
design of handle	knob-operated mechanism, black
type of the driving mechanism motor drive	No
General technical data	
number of poles	4
number of poles note	4
mechanical service life (operating cycles) typical	100 000
electrical endurance (operating cycles)	
• at AC-23 A at 690 V	6 000
operating frequency maximum	50 1/h
degree of pollution	3
Voltage	
insulation voltage rated value	690 V
surge voltage resistance rated value	6 kV
operating voltage	
• at AC rated value	690 V
operating frequency rated value	
• minimum	50 Hz
• maximum	60 Hz
Protection class	
protection class IP	IP65
degree of protection NEMA rating	1, 3R, 4X, 12
protection class IP on the front	IP65
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	1.1 W
Main circuit	
operational current	
• at AC-21 at 690 V rated value	25 A
• at AC-21 A at 240 V rated value	25 A
• at AC-21 A at 400 V rated value	25 A
• at AC-21 A at 440 V rated value	25 A
• at AC-23 A at 400 V rated value	20 A

operating power		
• at AC-23 A at 240 V rated value		4 kW
• at AC-23 A at 400 V rated value		10 kW
• at AC-23 A at 440 V rated value		9 kW
• at AC-23 A at 690 V rated value		9 kW
• at AC-3 at 240 V rated value		4 kW
• at AC-3 at 400 V rated value		8 kW
• at AC-3 at 690 V rated value		7.5 kW
Auxiliary circuit		
number of CO contacts for auxiliary contacts	0	
number of NC contacts for auxiliary contacts	1	
number of NO contacts for auxiliary contacts	1	
operating voltage of auxiliary contacts at AC maximum	500 V	
continuous current of the auxiliary contact rated value	10 A	
Suitability		
suitability for use		
• main switch	Yes	
• switch disconnector	Yes	
• EMERGENCY OFF switch	No	
• safety switch	Yes	
• maintenance/repair switch	Yes	
Product details		
special product feature	Can be locked in zero position	
product feature can be locked into OFF position	Yes	
accessories		
product extension optional		
• motor drive	No	
• voltage trigger	No	
number of connectable NC contacts for auxiliary contacts attachable maximum	2	
number of connectable NO contacts for auxiliary contacts attachable maximum	4	
number of connectable CO contacts for auxiliary contacts attachable maximum	0	
number of bracket locks maximum	2	
hasp thickness of the bracket locks	4 ... 6 mm	
Short circuit		
conditional short-circuit current with line-side fuse protection		
• at 440 V by gG fuse rated value	10 kA	
• at 690 V by gG fuse rated value	6 kA	
let-through current with closed switch		
• at 240 V for combination switch + gG fuse maximum	3.5 kA	
• at 440 V for combination switch + gG fuse maximum	3.5 kA	
• at 690 V for combination switch + gG fuse maximum permissible	4 kA	
I _{2t} value with closed switch		
• at 240 V for combination switch + gG fuse maximum	4 kA2.s	
• at 440 V for combination switch + gG fuse maximum	4 kA2.s	
• at 690 V for combination switch + gG fuse maximum	4 kA2.s	
design of the fuse link		
• for short-circuit protection of the main circuit required	fuse gL/gG: 25 A	
• for short-circuit protection of the auxiliary switch required	fuse gL/gG: 10 A	
operational current of upstream fuse rated value	25 A	
according UL		
operational current at AC according to UL 508/UL 60947-4-1 rated value	25 A	
operating voltage at AC at 50/60 Hz according to UL 508/UL 60947-4-1 rated value	600 V	
active power [hp] at AC at 480 V according to UL 508/UL 60947-4-1 rated value	10	
active power [hp] at AC at 600 V according to UL 508/UL 60947-4-1 rated value	15	
short-time withstand current (SCCR) at 600 V according to UL	5 kA	

508/UL 60947-4-1					
continuous current of upstream fuse according to UL rated value	50 A				
type of fuse according to UL	RK5				
Connections					
AWG number as coded connectable conductor cross section solid maximum					
•	6				
•	14				
type of connectable conductor cross-sections for copper conductor					
• solid	1x (2.5 to 16 mm ²)				
• finely stranded with core end processing	1x (2.5...16 mm ²)				
• stranded	1x (2.5 to 16 mm ²)				
type of connectable conductor cross-sections for auxiliary contacts					
• solid	2x (0.75 ... 2.5 mm ²), 1x 4 mm ²				
• finely stranded with core end processing	2x (0.75 ... 1.5 mm ²), 1x 2.5 mm ²				
• stranded	2x (0.75 ... 2.5 mm ²), 1x 4 mm ²				
type of electrical connection					
• for main current circuit	box terminal				
• for auxiliary contacts	Box terminals				
Mechanical Design					
height	60 mm				
width	60 mm				
depth	114 mm				
type of device	fixed mounting				
fastening method	Built-in unit fixed-mounted version				
fastening method					
• 4-hole front mounting	No				
• front mounting with central attachment	Yes				
• rail mounting	No				
net weight	200 g				
Environmental conditions					
ambient temperature during operation					
• minimum	-25 °C				
• maximum	55 °C				
ambient temperature during storage					
• minimum	-25 °C				
• maximum	55 °C				
Approvals Certificates					
General Product Approval					
		Confirmation			
other	Environment				
Miscellaneous	Confirmation	Environmental Confirmations	Environmental Confirmations		
Further information					
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875					
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs					
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD3150-1TL11					
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3LD3150-1TL11					

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3LD3150-1TL11

CAx-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

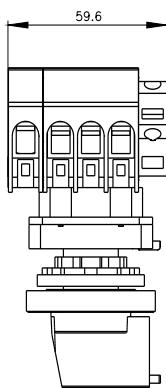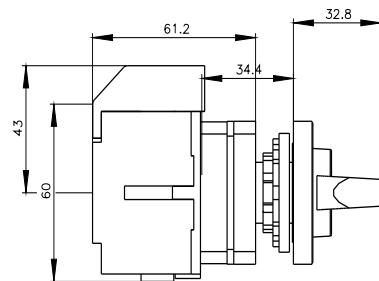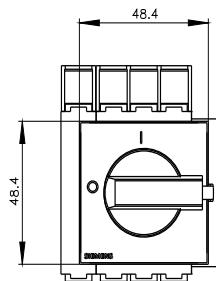

last modified:

6/20/2023 

