

DULUX D/E 10 W/827

OSRAM DULUX D/E | CFLni, 2 tubes, with 4-pin base for ECG operation



Areas of application

- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants
- Industry

Product benefits

- Extremely economical
- Good quality of light
- Excellent luminous flux
- Long service life
- Improved maintenance
- OSRAM System+ Guarantee in combination with OSRAM QUICKTRONIC ECG

Product features

- Average life: 20,000 h (with QUICKTRONIC)
- Color rendering index R_a : 80...89
- Dimmable (3...100 %)
- Short and compact pin-base lamp with double-turn tubes
- Single-ended four-pin plug-in G24q base
- Operates on battery, solar and AC power with suitable electronic control gear



Technical data

Electrical data



Nominal wattage	10.00 W
Rated wattage	10.00 W
Rated lamp efficacy (HF data 25 °C)	Under clarification by authority and standardization body
Energy consumption	11 kWh/1000h

Photometrical data

Nominal luminous flux	600 lm
Rated luminous flux	600 lm
Color temperature	2700 K
Light color	827
Light color as per EN 12464-1	LUMILUX INTERNA
Color rendering index Ra	80...89
Luminous flux at 25 °C	600 lm
Rated LLMF at 4,000 h	0.86
Rated LLMF at 6,000 h	0.84
Rated LLMF at 8,000 h	0.82
Rated LLMF at 12,000 h	0.79
Rated LLMF at 16,000 h	0.78
Rated LLMF at 20,000 h	0.76
Luminance	4 cd/cm ²
Color rendering group	1B

Dimensions & weight

Product datasheet



Product line drawing

Base

Overall length	101.0 mm
Product weight	31.00 g
Tube diameter	12 mm
Length	103.0 mm
Length acc. to IEC standard	95 mm
Length with base excl. base pins/connection	87.00 mm

Colors & materials

Lamp mercury content	1.4 mg
-----------------------------	--------

Temperatures

Rated ambient temp.w.max.luminous flux	25.0 °C
---	---------


Lifespan

Nominal lamp life time	20000 h
Rated lamp life time	20000 h
Service life	13000 h ¹⁾
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.99
Rated lamp survival factor at 8,000 h	0.99
Rated lamp survival factor at 12,000 h	0.95
Rated lamp survival factor at 16,000 h	0.81
Rated lamp survival factor at 20,000 h	0.50
Operation mode LLMF/LSF	HF
Lifespan	20000 h ¹⁾

Product datasheet

¹⁾ With preheat ECG

Additional product data

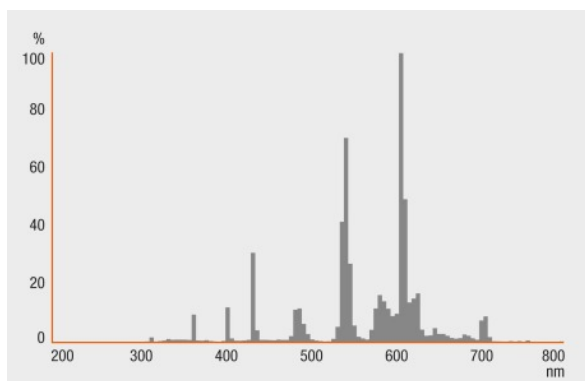

Spectral power distribution

Base (standard designation)	G24q-1
Appropriate disposal acc. to WEEE	Yes

Capabilities

Dimmable	Yes
Suitable for indoor	Yes

Certificates & standards

Energy efficiency class	A
-------------------------	---

Country specific categorizations

ILCOS	FSQH-10/827-/P/-G24q-1
-------	------------------------

Country specific information

Product code	METEL code	SEG number	STK number	UK Org
4050300012124	OSRDDE10827	8330170	4933921	-

Product datasheet

Lamp-ECG combination (System)

Product name	Product name ECG	EAN	Nominal current	Nominal wattage + Power loss	Luminous flux at 25 °C	Number of lighting outlets
DULUX D/E 10W/827 G24Q-1	DT-D/E 10-13/220-240 C		0.09 A	12.00 W	600 lm	1
	DT-D/E 10-13/220-240 L		0.09 A	12.00 W	600 lm	1
	DT-D/E 10-13/220-240 P		0.09 A	12.00 W	600 lm	1
	QT-ECO 1x4-16/220-240 L	4050300660370	0.08 A	11.50 W	600 lm	1
	QT-ECO 1x4-16/220-240 S	4050300638584	0.08 A	11.50 W	600 lm	1
	QT-ECO 2x5-11/220-240 S	4050300821504	0.14 A	20.00 W	600 lm	2
	QTP-D/E 1x10-13	4008321181572	0.05 A	12.00 W	600 lm	1
	QTP-D/E 2x10-13	4008321181596	0.09 A	21.00 W	2*600 lm	2




Guarantee

Equipment / Accessories


- Suitable for operation on electronic control gear

Safety advice


In case of lamp breakage: www.osram.com/brokenlamp



Circuit diagram

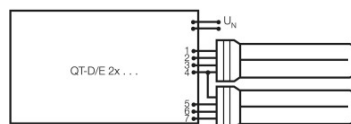


Circuit diagram



Circuit diagram

Product datasheet



Circuit diagram

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Volume	Gross weight
4050300012124	DULUX D/E 10 W/827	Folding carton box 1	36 mm x 36 mm x 120 mm	0.16 dm ³	37.60 g
4050300245423	DULUX D/E 10 W/827	Shipping carton box 10	103 mm x 133 mm x 166 mm	2.27 dm ³	428.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For more information on QUICKTRONIC electronic control gear go to

▶ www.osram.com/QUICKTRONIC

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.