



Appliance 40W E14 240V P45 CL OV 1CT

Product family description
Lustre vacuum lamps with clear glass (P-bulb)

Product Features

- Coiled-coil filament
- Manufactured with heat-resistant solder, getter and lamp-base cement

Product Benefits

- Reliable operation when used in special lampholders at high oven temperatures (up to 300°C)

Application


- Electrical and standard ovens, rotisseries and similar places subject to high operating temperatures
- Available for specific oven luminaires fitted in different positions such as downlighter, side-light and backlight

| Product data | |
|---|--|
| Order code | 035455 50 |
| Full product code | 871150003545550 |
| locod | |
| Full product name | Appliance 40W E14 240V P45 CL OV 1CT |
| Order product name | Appl 40W E14 240V P45 CL OV 1CT/10X10F |
| Packing type | 1 Lamp in a Folding Carton |
| Pieces per pack | 1 |
| Packing configuration | 10X10F |
| Packs per outerbox | 100 |
| Bar code on pack - EAN1 | 8711500035455 |
| Bar code on intermediate packing - EAN2 | 8711500085214 |
| Bar code on outerbox - EAN3 | 8711500085221 |
| Logistic code(s) - 12NC | 9232 659 45546 |
| ILCOS code | IBP/C-40-240-E14-45* |
| Net weight per piece | 15.460 GR |
| Successor order code | |
| Cap-Base | SES |
| Bulb | P45 [P 45mm] |


| Product data | |
|-------------------------------|---------------------|
| Bulb Finish | Clear |
| Execution | - |
| Burning Position | any [Any/Universal] |
| Main Application | Oven |
| Average Lifetime | 1000 hr |
| Rated Lamp Wattage | 40W |
| Voltage | 240V |
| Energy Efficiency Label (EEL) | E |
| Lamp Luminous Flux | 420 Lm |




Appl E14 P45 CL



Cap-Base SES

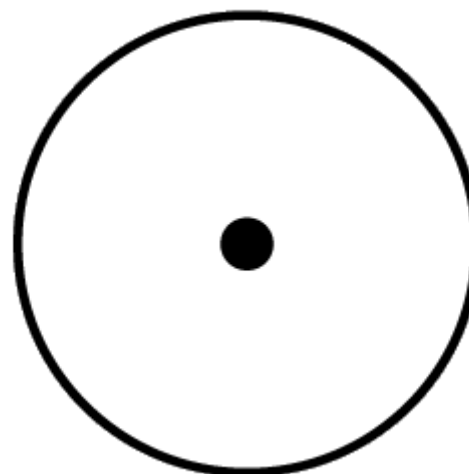

Burning Position any

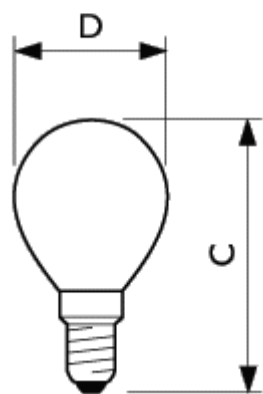

Appl E14 P45

| | C | D |
|--|-----|-----|
| Full product name | Max | Nom |
| Appliance 40W E14 240V P45 CL OV ICT | 78 | 45 |

