


Number of contacts

# 25

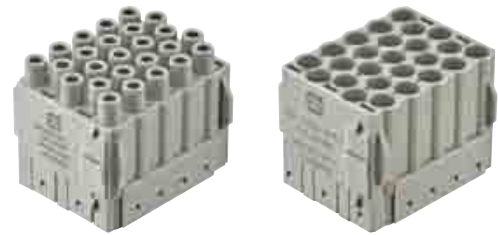

Identification	Part number		Drawing	Dimensions in mm
	Male insert (M)	Female insert (F)		
Han-Yellock® Monoblock 30  Order crimp contacts separately suitable for hoods/housings size 30  <b>ATTENTION!</b> It is not possible to use 2 monoblocks 30 in the Han-Yellock® 60 series!	<b>11 05 325 3001</b>	<b>11 05 325 3101</b>		

Identification	Wire gauge (mm²)	Part number		Drawing	Dimensions in mm
		Male contact	Female contact		
Han-Yellock® crimp contacts Han-Yellock® TC20  silver plated  	0.14-0.37 0.5 0.75 1 1.5 2.5 3 4	<b>11 05 000 6101</b> <b>11 05 000 6102</b> <b>11 05 000 6103</b> <b>11 05 000 6104</b> <b>11 05 000 6105</b> <b>11 05 000 6106</b> <b>11 05 000 6107</b> <b>11 05 000 6108</b>	<b>11 05 000 6201</b> <b>11 05 000 6202</b> <b>11 05 000 6203</b> <b>11 05 000 6204</b> <b>11 05 000 6205</b> <b>11 05 000 6206</b> <b>11 05 000 6207</b> <b>11 05 000 6208</b>		
gold plated  	0.14-0.37 0.5 0.75 1 1.5 2.5 3 4	<b>11 05 000 6121</b> <b>11 05 000 6122</b> <b>11 05 000 6123</b> <b>11 05 000 6124</b> <b>11 05 000 6125</b> <b>11 05 000 6126</b> <b>11 05 000 6127</b> <b>11 05 000 6128</b>	<b>11 05 000 6221</b> <b>11 05 000 6222</b> <b>11 05 000 6223</b> <b>11 05 000 6224</b> <b>11 05 000 6225</b> <b>11 05 000 6226</b> <b>11 05 000 6227</b> <b>11 05 000 6228</b>		

Wire gauge		Stripping length	
0.14-0.37	mm²	AWG 26-22	6.5 mm
0.5	mm²	AWG 20	6.5 mm
0.75	mm²	AWG 18	6.5 mm
1	mm²	AWG 18	6.5 mm
1.5	mm²	AWG 16	6.5 mm
2.5	mm²	AWG 14	6.5 mm
3	mm²	AWG 12	6.5 mm
4	mm²	AWG 12	6.5 mm

Removal tool for crimp contacts	<b>09 99 000 0319</b>	<b>09 99 000 0319</b>	
---------------------------------	-----------------------	-----------------------	--

Stock items in bold type