





O.P. = OPERATING POINT
P.T. = PRE-TRAVEL

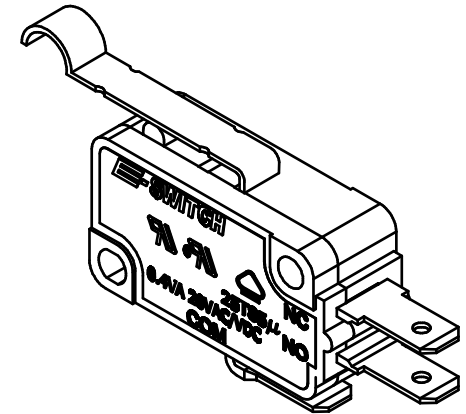

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
3. RATING: 0.4VA @ 20 VAC OR VDC
4. OPERATING FORCE: 085 ± 30 GRAMS
5. OPERATING TEMP: -25°C TO 85°C
6. ELECTRICAL LIFE: 50,000 CYCLES MIN.
7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
8. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
9. DIELECTRIC STRENGTH: 1500VAC 1 MINUTE (INITIAL VALUE)
10. CONTACT RESISTANCE: 100 MILLI -OHMS MAX.
11. ▲ DENOTES CRITICAL PARAMETER.
12. 2002/95/EC (ROHS) COMPLIANT
13. CONTACTS: 10 MICRO INCHES MINIMUM GOLD PLATING (P/N Q990000)

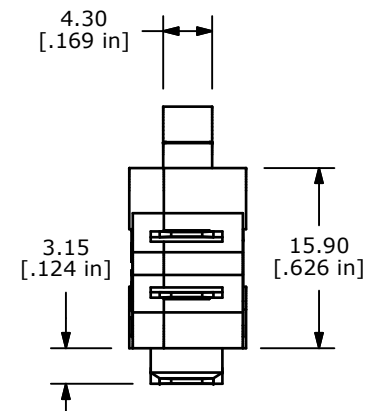

A	18204	RELEASED FOR PRODUCTION	8/12/08	BLR	TITLE LS085R104F085C1A				
REV	PCR NO	DESCRIPTION	DATE	BY					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 1.5:1	DATE 8/12/2008	DR BLR	DWG Q950059	REV A