


Product data sheet

Characteristics

NSYCVF38M230PF

ClimaSys forced vent. IP54, 38m³/h, 230V, with outlet grille and filter G2

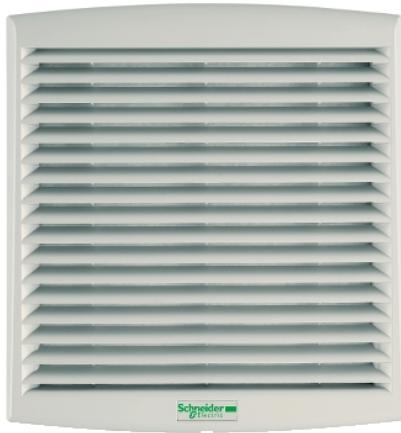

Main

Range	ClimaSys
Product name	ClimaSys CV
Product or component type	Fan
Type of filter	Standard
Flow rate	Free flow rate with standard filter 10038.72 Gal/hr(US) (38 m ³ /h) 50 Hz Free flow rate with standard filter 10302.89 Gal/hr(US) (39 m ³ /h) 60 Hz
[Us] rated supply voltage	150...250 V
Input voltage	230 V 50/60 Hz

Complementary

Absorbed power	4.5 W 50 Hz 4.8 W 60 Hz
Line Rated Current	0.16 A 50 Hz 0.17 A 60 Hz
Noise level < at	40...41 dB
Bearing type	Ball
Height	External 5.39 in (137 mm)
Width	External 4.61 in (117 mm)
Depth	External 1.93 in (49 mm)
Cut-out dimensions	92 x 92 mm
Net Weight	0.49 lb(US) (0.22 kg)
Material	Outlet grille injected thermoplastic (ASA PC)
Color	Outlet grille Gray RAL 7035)
Ambient air temperature for operation	14...158 °F (-10...70 °C)
Ambient air temperature for storage	-40...158 °F (-40...70 °C)
Maximum pressure	29 Pa flow rate 0 m ³ /h
Connections - terminals	Cable
IP degree of protection	IP54
Device composition	1 axial motor 2 protective grille on the front and rear surfaces 1 filter front of axial motor 1 outlet grille front 1 cut-out template
Condition of use	Outside temperature must be 5 °C lower than inside temperature Flow rates depends on the work point, see ProClima software Surrounding environment must be relatively clean Filter must be cleaned and replaced regularly Overfrequent filter replacement should be avoided

Ordering and shipping details

Category	80036 - ENCLOSURE SYSTEMS ACCESSORIES
Discount Schedule	ES1
GTIN	00785901698531
Nbr. of units in pkg.	1
Package weight(Lbs)	0.48 lb(US) (0.22 kg)
Returnability	No
Country of origin	FR

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	2.76 in (7 cm)
Package 1 width	4.80 in (12.2 cm)
Package 1 Length	5.67 in (14.4 cm)

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration

Contractual warranty

Warranty	18 months
----------	-----------