
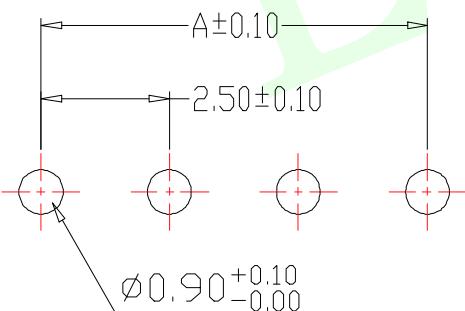
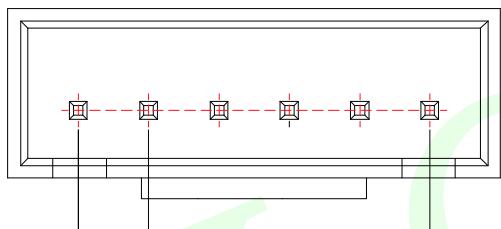


RoHS Compliant

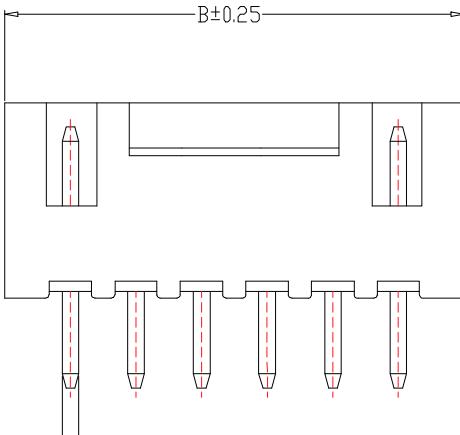


PCB LAYOUT

技术要求:

- 1、塑件材料: CM3004 (UL-94V-0)
- 2、接触件: 黄铜镀锡
- 3、接触电阻: $\leq 10\text{m}\Omega$
- 4、绝缘电阻: $\geq 1000\text{M}\Omega$
- 5、额定电压: 250V AC DC
- 6、额定电流: 3.0A AC DC
- 7、耐压: 能承受1000V AC/Minute
- 8、工作温度: $-25^\circ \sim +85^\circ$
- 9、可焊性试验: 浸锡面积 $\geq 95\%$ 温度 $220^{\circ} \pm 5^\circ$, 时间 2.5 ± 0.5 秒
- 10、铅和镉等六大有害物质含量要符合环保要求

2^4A



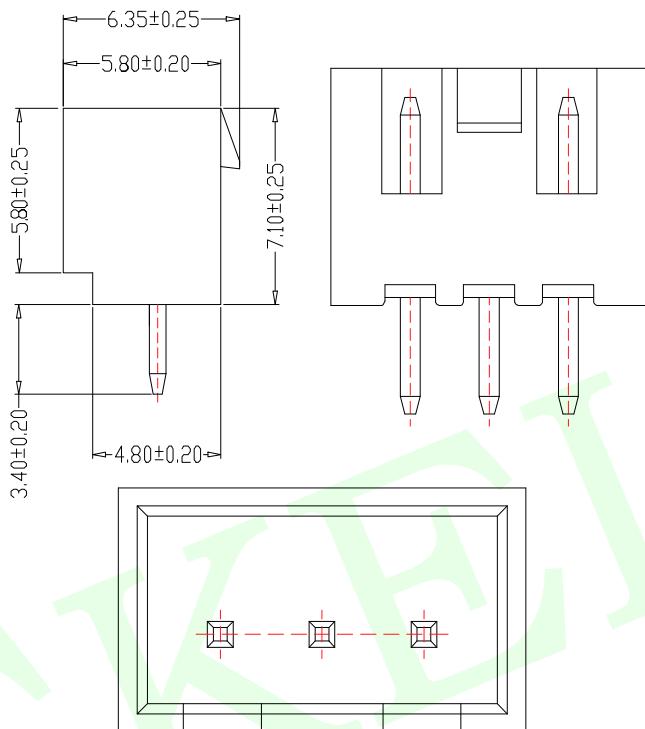


LCK-WF-B254Z-NA
连晟欣
LCK
产品类别
WF: WAFER针座
产品间距
XHB 2.54直针: B254Z
XHB 2.54弯针: B254WZ

PIN位
2A:2PIN
.....
15A:15P


Dimension mm		
PIN	A	B
2P	2.50	7.50
3P	5.00	10.00
4P	7.50	12.50
5P	10.00	15.00
6P	12.50	17.50
7P	15.00	20.00
8P	17.50	22.50
9P	20.00	25.00
10P	22.50	27.50
11P	25.00	30.00
12P	27.50	32.50
20P	47.50	52.50

序号	名称	材料	电镀(锡): 整个表面镀底镍 30U"MIN 再镀锡80U" MIN		
			白色		
1	端子/Contact	黄铜			
2	基座/Wafer	LCP/PA66 (UL94V-0)			

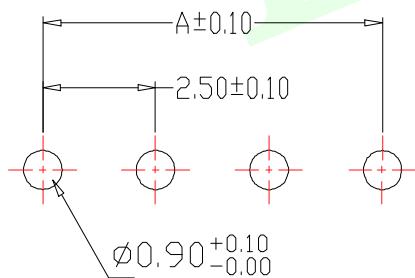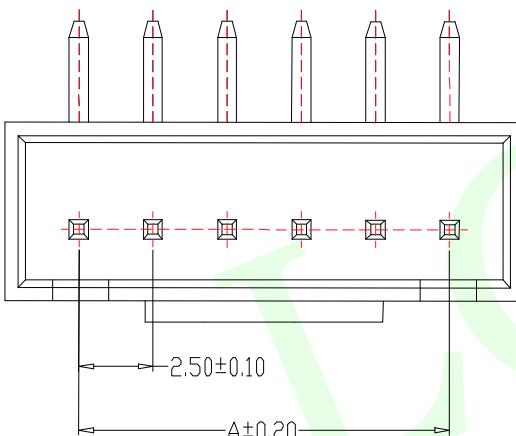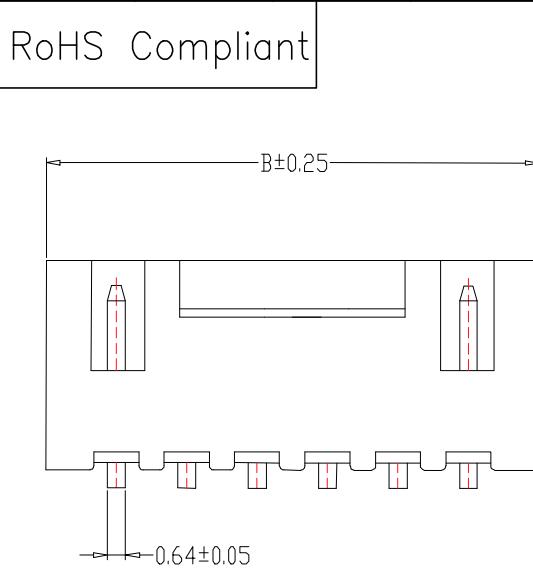

PCB LAYOUT

- 技术要求:
- 1、塑件材料: CM3004 (UL-94V-0)
 - 2、接触件: 黄铜镀锡
 - 3、接触电阻: $\leq 10\text{m}\Omega$
 - 4、绝缘电阻: $\geq 1000\text{M}\Omega$
 - 5、额定电压: 250V AC DC
 - 6、额定电流: 2.0A AC DC
 - 7、耐压: 能承受1000V AC/Minute
 - 8、工作温度: $-25^\circ \sim +85^\circ$
 - 9、可焊性试验: 浸锡面积 $\geq 95\%$ 温度 220°C , 时间 2.5 ± 0.5 秒
 - 10、铅和镉等六大有害物质含量要符合环保要求

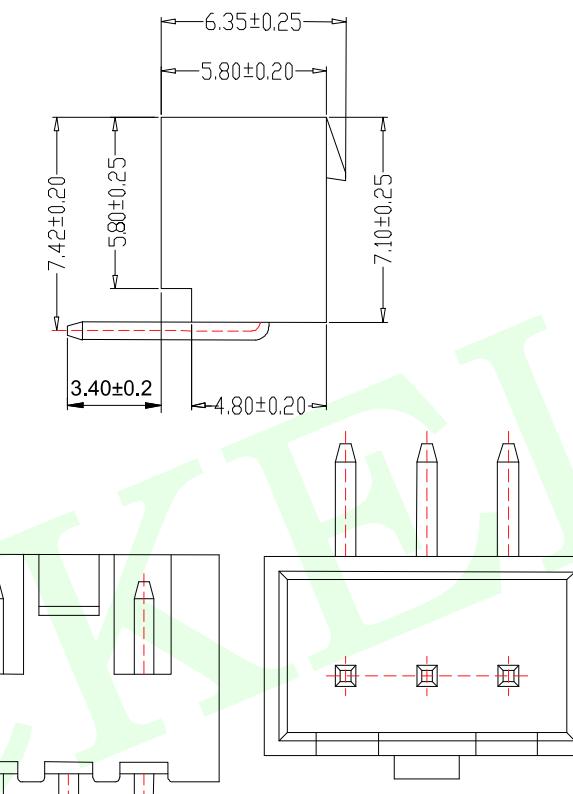

2~4A

LCK-WF-B254WZ-NA
连晟欣
LCK
产品类别
WF: WAFER针座
产品间距
XHB 2.54直针: B254Z
XHB 2.54弯针: B254WZ

PIN位
2A:2PIN
.....
15A:15P

Dimension mm		
PIN	A	B
2P	2.50	7.50
3P	5.00	10.00
4P	7.50	12.50
5P	10.00	15.00
6P	12.50	17.50
7P	15.00	20.00
8P	17.50	22.50
9P	20.00	25.00
10P	22.50	27.50
11P	25.00	30.00
12P	27.50	32.50
20P	47.50	52.50

序号	名称	材料	电镀(锡): 整个表面镀底镍			
			30U"MIN 再镀锡80U" MIN			
1	端子/Contact	黄铜				
2	基座/Wafer	LCP/PA66 (UL94V-0)	白色			
MEASURE POINT: QUADRANT POINT (QP) TANGENCY POINT (TP) INTERSECTION POINT (IP)						
 联晟欣连接器(深圳)有限公司 Lianshengxin Connector (Shenzhen) Co., Ltd						
UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ± 0.20 X.x ± 0.10 X.xx ± 0.05 ANGULAR $\pm 3^\circ$	DESIGN	Andy	DATE	2014.12.24		
	CHECKED		DATE			
	APPROVED		DATE			
PART NO: LCK-WF-B254WZ-NA		REV: 04	SCALE: 1:1	UNIT: mm		
DRAWING NO: HA254WZ-NA		SIZE: A4	SHEET: 1/1	◎		