


Features

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors(see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input.They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy



SOT-323



Equivalent Circuit

Absolute Maximum Ratings(TA=25℃)

Symbol	Parameter	Limits	Uniat
V _{CC}	Supply Voltage	50	V
V _{IN}	Input Voltage	-5 ~ +30	V
I _O	Output Current	100	mA
P _D	Power Dissipation	200	mW
T _J	Junction Temperature	150	℃
T _{stg}	Storage Temperature	-55 ~ +150	mW

Electrical Characteristics (TA=25℃ unless otherwise specified)

Symbol	Parameter	Test conditions	Min	Typ	Max	Unit
V _{I(off)}	Input voltage	V _{CC} =5V, I _O =100μA	0.5			V
V _{I(on)}		V _O =0.3V, I _O =5mA			1.3	V
V _{O(on)}	Output voltage	I _O /I _{II} =5mA/0.25mA		0.1	0.3	V
I _I	Input current	V _I =5V			1.8	mA
I _{O(off)}	Output current	V _{CC} =50V, V _I =0			0.5	μA
G _I	DC current gain	V _O =5V, I _O =10mA	80			
R _I	Input resistance		3.29	4.7	6.11	kΩ
R ₂ /R ₁	Resistance ratio		8	10	12	
f _T	Transition frequency	V _O =10V, I _O =5mA, f=100MHz		250		MHz

Ordering information

Product ID	Marking	Naming rule	Pack	Qty(PCS)
DTC143ZUA	E23	DTC143ZUA 产品名称 product name	SOT-323	3000




TWTLSEMI

TL-DTC143ZUA






SOT-323 DIGITAL TRANSISTOR (NPN)

Typical Characteristics


ON Characteristics

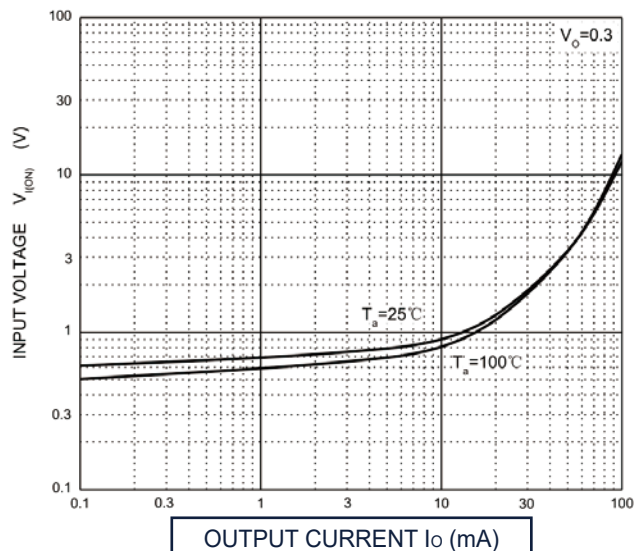

OFF Characteristics

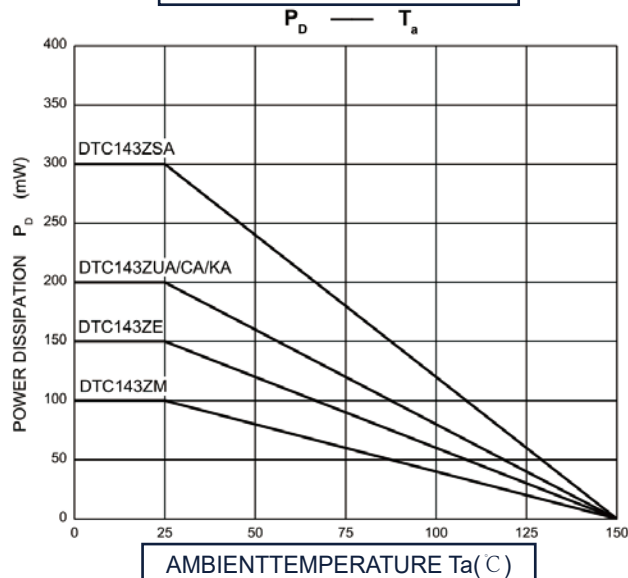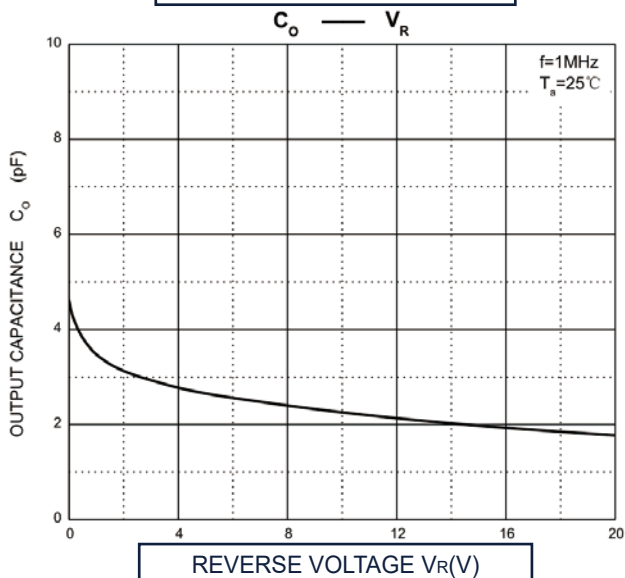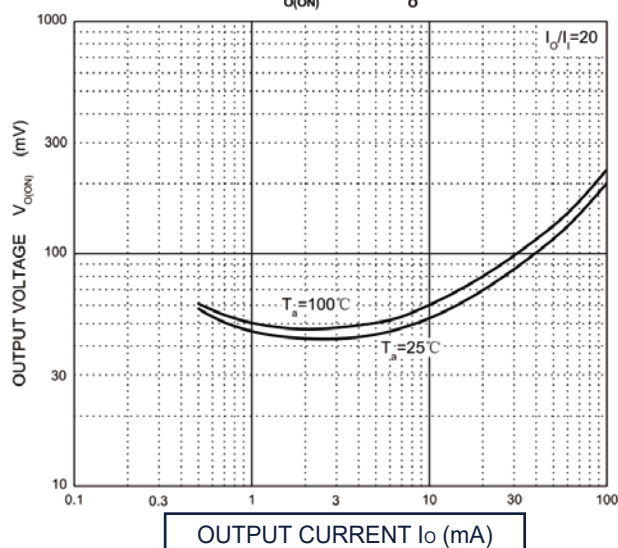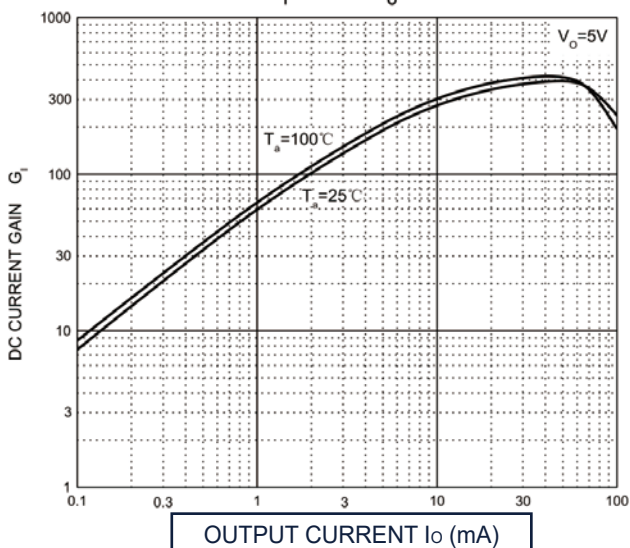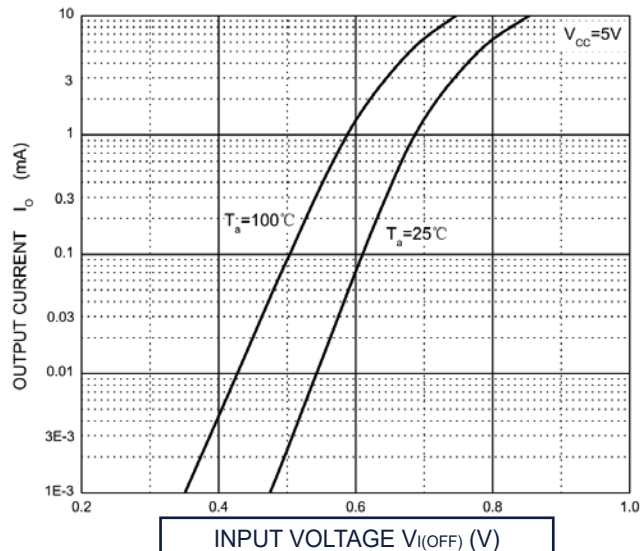

SOT-323 Package Outline Dimensions

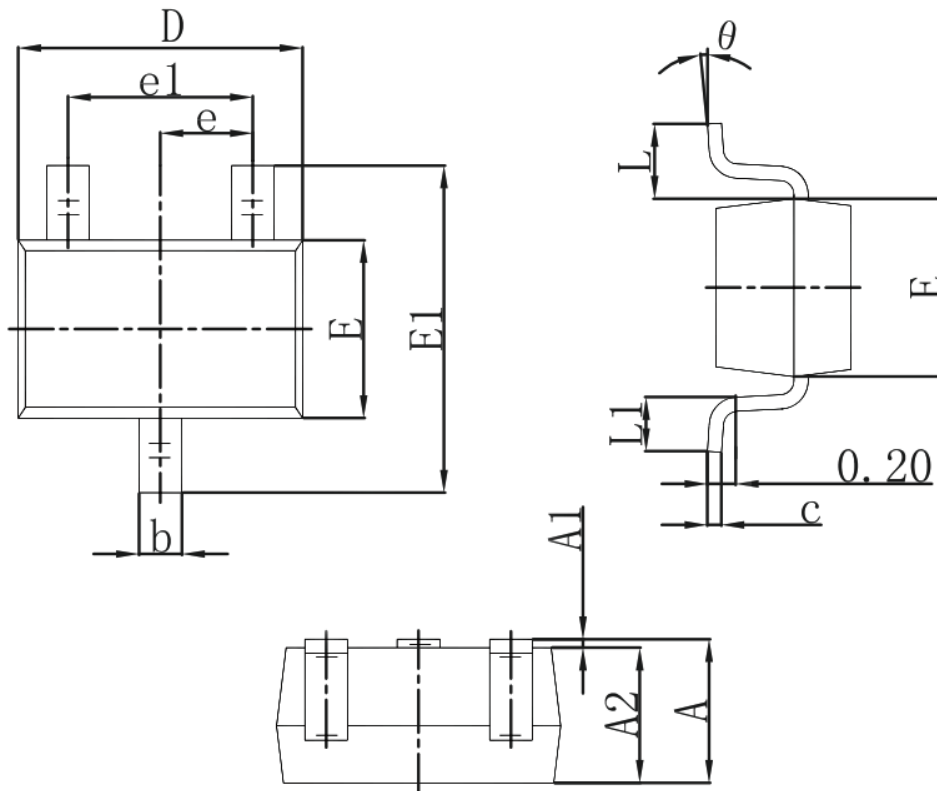

Symbol	Dimensions in Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.200	0.400	0.008	0.016
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	1.350	2.450	0.085	0.096
e	0.650 TYP		0.026 TYP	
e1	1.200	1.400	0.047	0.055
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°