

General description

The ESD9D5.0C is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time , make these parts ideal for ESD protection on designs where board space is at a premium.

Features and benefits

- Low Capacitance 15 pF(Typ)
- Reverse stand-off voltage: 5V Max
- Low leakage current: nA Level
- Low Clamping Voltage
- Response time is typically < 1 ns
- IEC61000-4-2 Level 4 ESD Protection



SOD923



Application information

- Cell phones
- Audio equipment
- Portable devices
- Digital cameras
- Power supplies

Ordering information

Device	Package	Reel Size	Qty(PCS)
ESD9D5.0C	SOD923	7 Inch	8000

Ordering information



Marking	Naming rule	Graphic symbol
C		

Maximum Ratings ($T_A = 25^\circ\text{C}$, unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power ($t_p = 8/20\mu\text{s}$)	P_{PPM}	80	W
Peak Pulse Current($t_p = 8/20\mu\text{s}$)	I_{PPM}	9	A
Maximum lead temperature for soldering during 10s	T_L	260	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to +150	$^\circ\text{C}$
Operating Temperature Range	T_{OP}	-40 to +125	$^\circ\text{C}$
Maximum junction temperature	T_j	150	$^\circ\text{C}$
ESD voltage IEC 61000-4-2 (air discharge)	V_{ESD}	30	kV
ESD voltage IEC 61000-4-2 (contact discharge)	V_{ESD}	30	kV


Electrical Characteristics ($T_A = 25^\circ\text{C}$, unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Reverse Working Voltage	V_{RWM}	--	--	5.0	V	
Breakdown Voltage	V_{BR}	5.6	--	--	V	$I_T=1\text{mA}$
Leakage Current I_{Leak}	I_R	--	--	100	nA	$V_{RWM}=5\text{V}$
Clamping Voltage	V_C	--	--	10.0	V	$I_{PP}=9\text{A}, T_p=8/20\mu\text{s}$
Junction Capacitance	C_J	--	15	18	pF	$V_R=0\text{V}, f=1\text{MHz}$

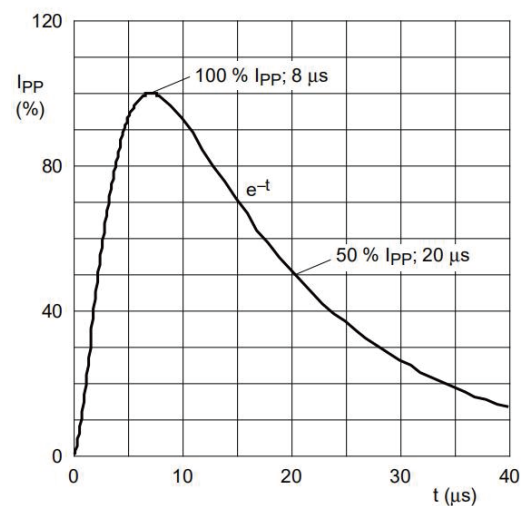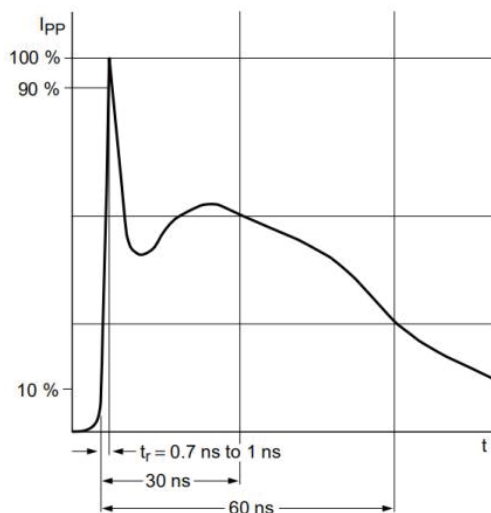

Package Outline Dimensions

SOD923

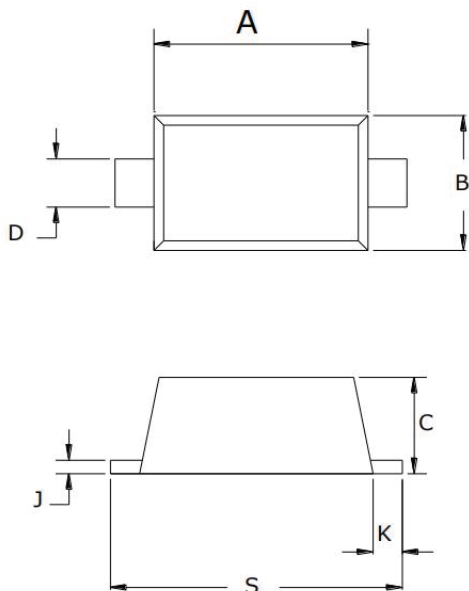

SYMBOL	MILLIMETERS	
	MIN	MAX
A	0.74	0.86
B	0.54	0.66
C	0.35	0.45
D	0.14	0.26
K	0.04	0.16
S	0.95	1.10

Soldering Footprint (mm)

