


Coaxial Cable Connector 24_MM CX-50-2-1/111_O

Description

Straight bulkhead cable feed through

Interface standards
SUHNER-MM CX

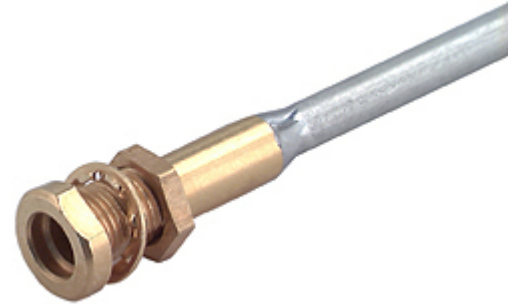

Technical Data

Electrical Data

Impedance 50 Ω
Interface frequency max. 6 GHz

Mechanical Data

Centre contact crimped
Outer contact soldered
Weight 0.0009 kg

Environmental Data

Operating temperature -55 °C to 155 °C
2011/65/EU (RoHS - including
2015/863 and 2017/2102) compliant

Material Data

Piece Parts	Material	Surface Plating
Centre contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Outer contact	Brass	Gold Plating (without Nickel underplating)
Body	Brass	Gold Plating (without Nickel underplating)
Insulator	PFA / PTFE	
Fastening nut	Brass	Gold Plating (without Nickel underplating)
Washer	Bronze	Gold Plating (without Nickel underplating)

Related Documents

Outline drawing DOU-00009970
Catalogue drawing DCA-00009291
Assembly instruction DOC-0000180170
Mounting hole DOU-00009144

Ordering Information

Single package 24_MM CX-50-2-1/111_OE

Additional Information

Suitable cables EZ_86_TP_M17