



REV.	ECN NO.	REVISED	DATE

NOTE:
1.MATERIAL:
a.HOUSING:PBT UL94 V-0
b.CONTACT:PHOSPHOR BRONZE
(SURFACE PLATING:Ni=100u"-120u")
SEE ORDERING INFORMATION
2.ELECTRIC:
a.CONTACT RESISTANCE: 100 MILLIOHMS MAX
b.INSULATION RESISTANCE: 100 MEGA OHMS MIN
c.DIELECTNIC VOLTAGE: 500V AC ONE MINUTE
d.OPERATING TEMPERATURE: -25°C~ +85°C


ORDERING INFORMATION
BS-02-A1AJ006

电池座系列
BS-02系列
DIP 90° TYPE

PLATING:
A-Au1U"
J-Ni100U"~120U"
K-Sn100U"~120U"

MATERIAL:
1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK

工程部
2020-08-05
LQ. HUANG

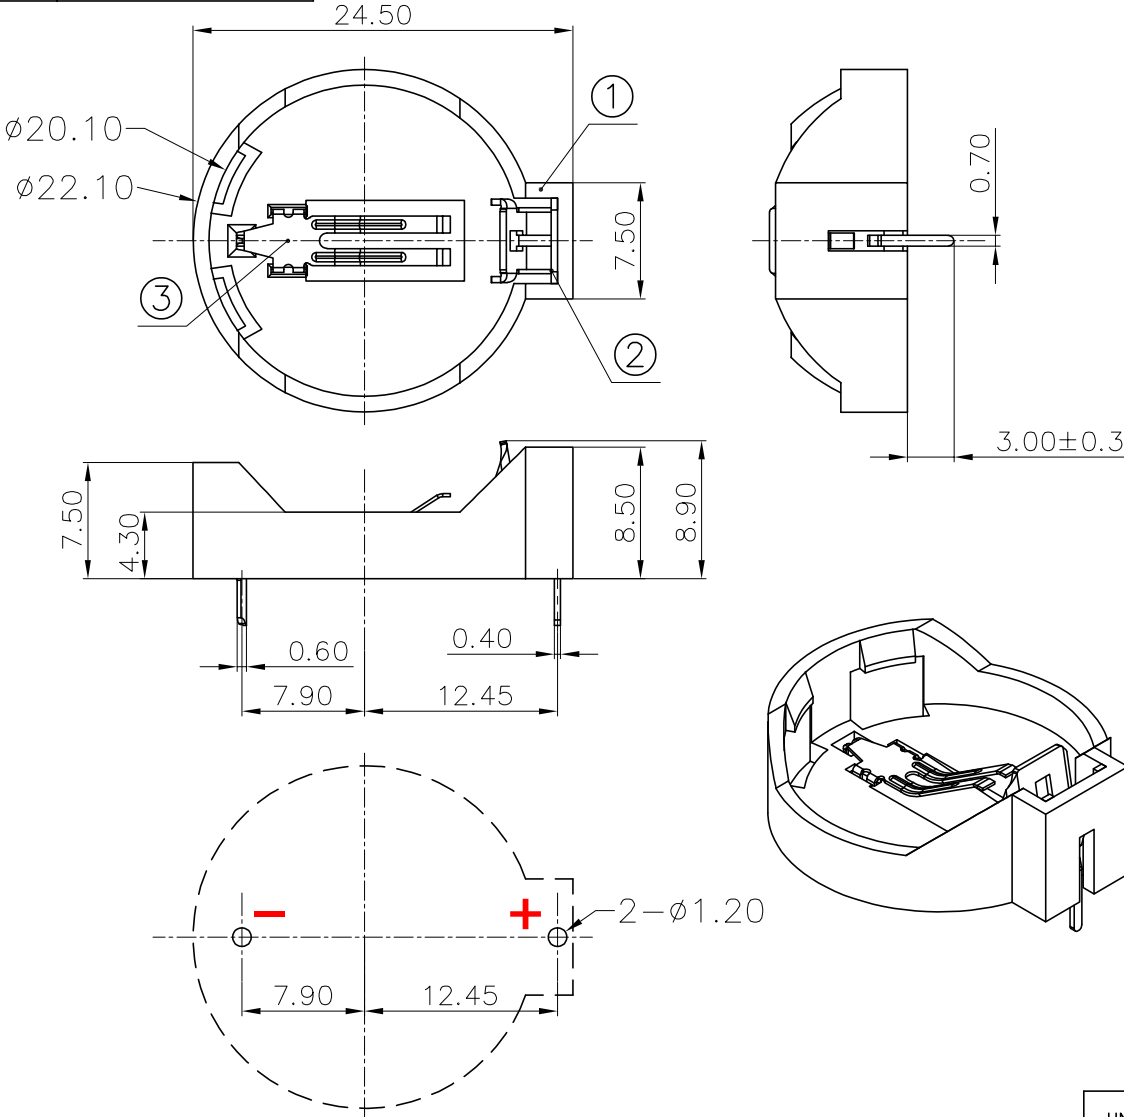

PCB Layout Diagram
Top View

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20mm	Ni-Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.40mm	Ni-Plating
1	HOUSING	1	PBT UL94 V-0	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES		MYOUNG 美用 www.meiyangdz.com					
DECIMALS: X :±0.30 X.X :±0.25 X.XX :±0.20 X.XXX :±0.10	ANGLES: X :±1° X.X :±0.5°	DSND	HuangLieQing	DATE	2021-07-07	TITLE:	
		CHKD	ZhouRuicai	DATE	2021-07-07	BS-2032-2-1 2.0 DIP 盐雾72H	
		APVD	XueShunyong	DATE	2021-07-07	PART NO.:	
		WEIGHT:		SCALE:	SIZE: A4	VIEW: 	BS-02-A1AJ006
SHEET 1 OF 1		UNIT: mm	REV.: A/1	OBJECT: MY	DRAW NO.:MY-CP-0235		