

SENCITY® Road PUCK Antenna

K7023211

Properties

- Frequency range from 406 to 428 MHz
- ECE-R118 approved
- Single-hole mounting with only 70mm in height



CE UK
CA

Electrical bands

	Band 1	Band 2	Band 3
Frequency	406 MHz ... 410 MHz	410 MHz ... 425 MHz	425 MHz ... 428 MHz
VSWR	1.9	1.7	1.9
Impedance	50 Ω	50 Ω	50 Ω
Ambient Temperature	25 °C	25 °C	25 °C

Electrical remarks

Remarks	Indicated VSWR values are valid for a metallic ground plane of 1M x 1M or larger.
---------	---

Ports

	Port 1
Port name	Tetra
Connector	N, jack (female)
Polarization	vertical
DC grounded	Yes

Connections

Port number	Port 1
Band 1	<input checked="" type="checkbox"/>
Band 2	<input checked="" type="checkbox"/>
Band 3	<input checked="" type="checkbox"/>

SENCITY® Road PUCK Antenna

K7023211

Mechanical data

Weight	0.4 kg
Dimensions	70 mm x 110 mm (Height x Diameter)
Remarks	Packaging size (outside): 117 x 117 x 114 mm Radiator and base: Aluminum. All metal parts of this antenna are DC grounded. Robust and car-wash proof vehicular antenna.

Interface and material data

Radome material	High impact plastic
Radome colour	Grey
Back plate/base plate material	Aluminum
Back plate/base plate colour	Black

Environmental data

Operation temperature	-40 °C ... 85 °C
Storage temperature	-55 °C ... 85 °C
Environment (application)	Outdoor
Ingress protection (IP Rating)	Mated / IP56
Flammability rating	ECE-R118

Environmental remarks

ECE-R118 for rooftop installation only.


Additional Information

The drilling diameter is 12 mm except the N connector versions: 17 mm. A special zinc washer ensures a good contact at the edges of the hole.

SENCITY® Road PUCK Antenna

K7023211

Outline drawing

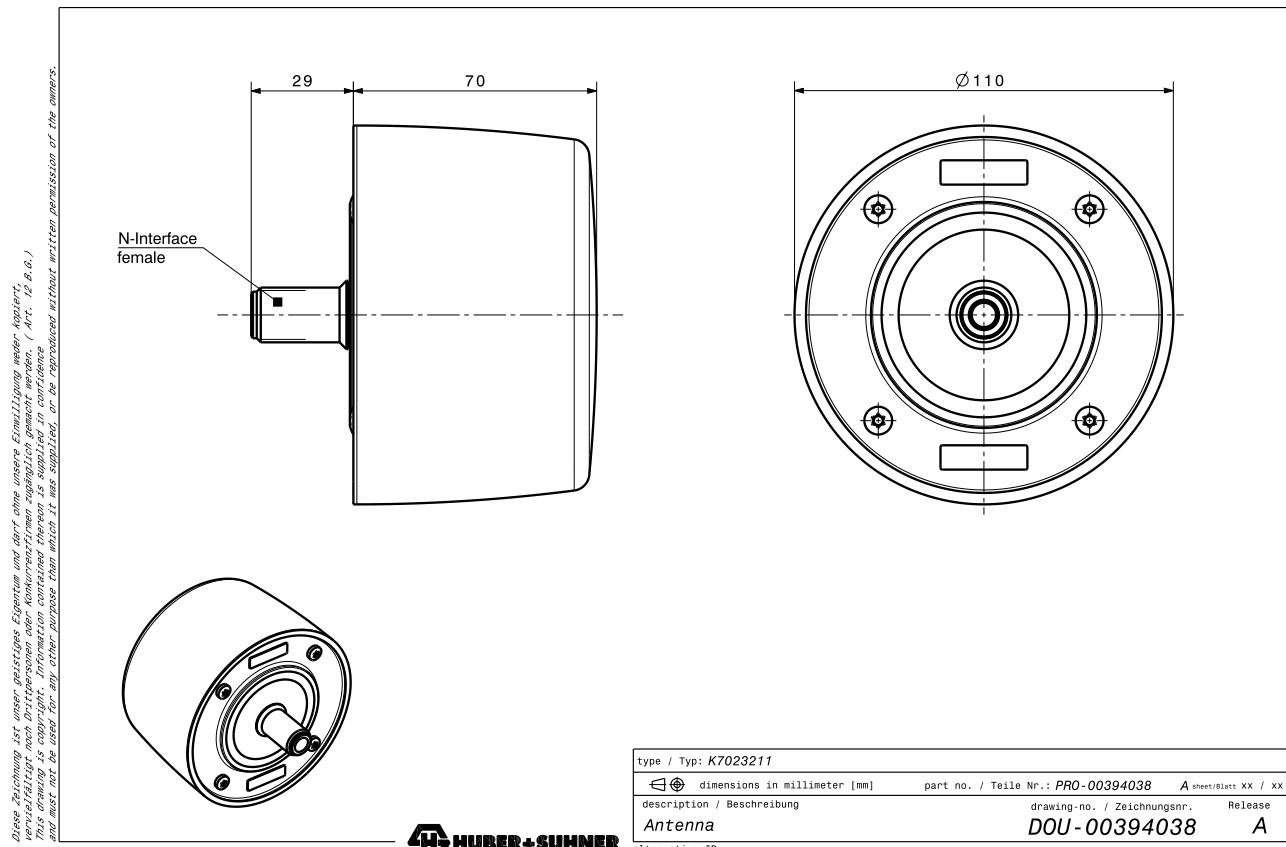

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P1028 / Date of publication: 07.06.2024 / uncontrolled copy