





| O.P. (MM)  | P.T. (MM) |
|------------|-----------|
| 19.0 ± 1.5 | 5.2 MAX.  |

O.P. = OPERATING POINT  
P.T. = PRE-TRAVEL



## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4  
X.XX = ± 0.25
3. RATING: 15A @125/250VAC
- ▲ 4. OPERATING FORCE: 125 ± 40gf
5. OPERATING TEMP: -25°C to 85°C
6. ELECTRICAL LIFE: 50,000 CYCLES MIN.
7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
8. INSULATION RESISTANCE: 100 Mega-OHMS MIN.
9. DIELECTRIC STRENGTH: 1500VAC 1 MINUTE (INITIAL VALUE)
10. CONTACT RESISTANCE: 100 Milli-OHMS MAX.
11. ▲ DENOTES CRITICAL PARAMETER.

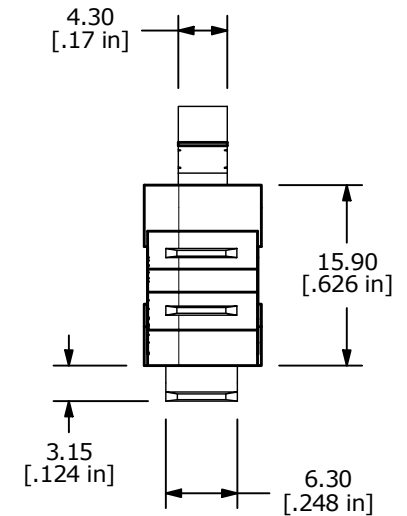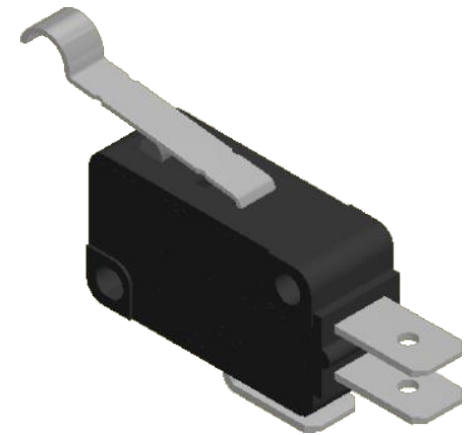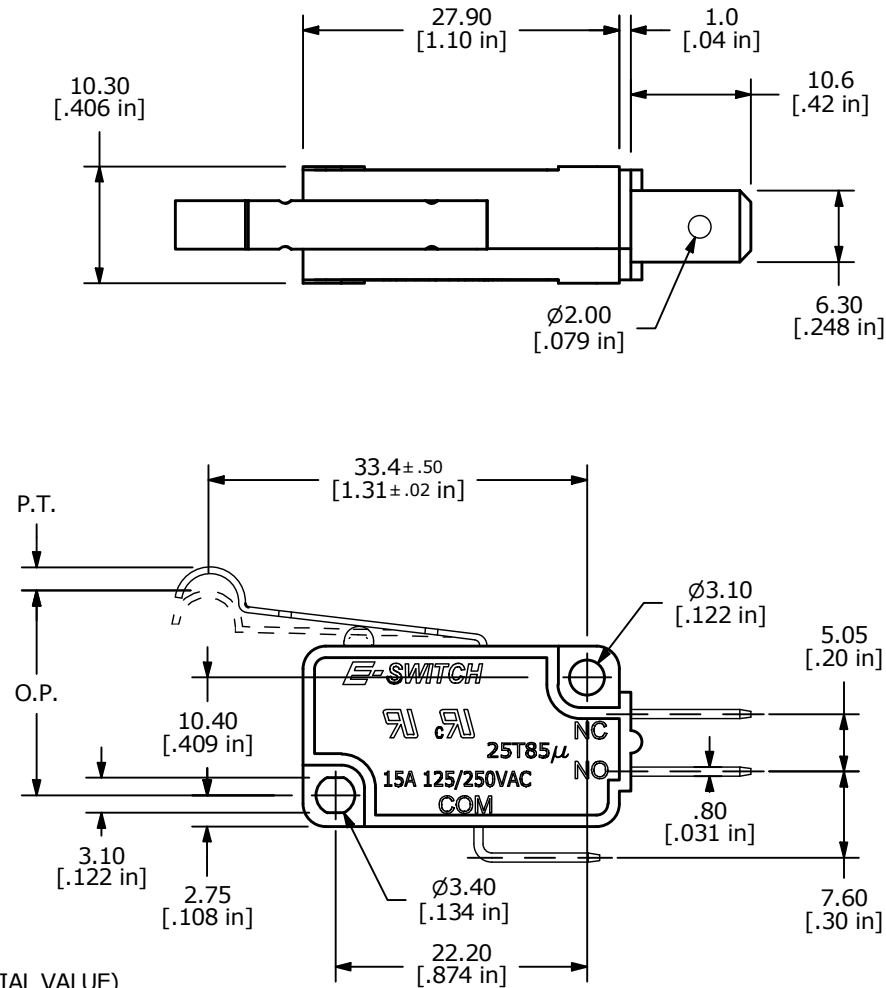

| REV                                                                                                          | ECO NO     | DESCRIPTION                | DATE     | BY | E-SWITCH®              |           |    |         | OBJECT ID |
|--------------------------------------------------------------------------------------------------------------|------------|----------------------------|----------|----|------------------------|-----------|----|---------|-----------|
| B                                                                                                            | ECO-100844 | REMOVE VDE RATING AND LOGO | 05/03/22 | JS | TITLE LS0851504F125C2A |           |    |         | 000021104 |
| THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED |            |                            |          |    | SCALE                  | DATE      | DR | DWG     | REV       |
|                                                                                                              |            |                            |          |    | 3:2                    | 7/10/2017 | MW | Q950120 | B         |