

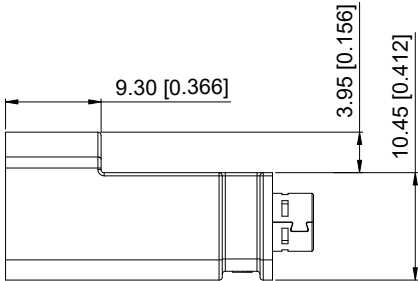
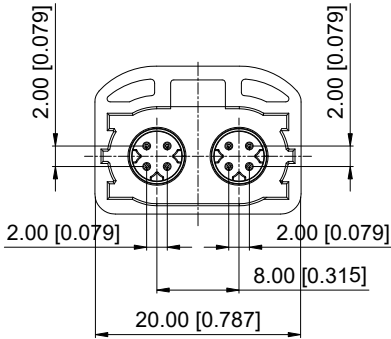



ROHS

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	2024.09.18	



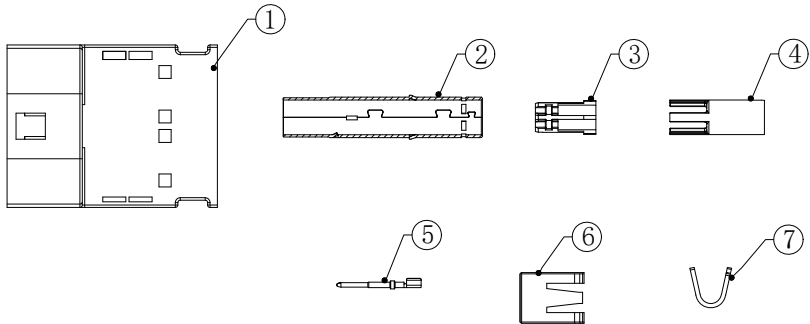
3D View



- Specifications(规格):
- 1.Impedance(特性阻抗) : 100Ω;
 - 2.Frequency (工作频率) : DC~2GHz;
 - 3.Return Loss (回波损耗) : ≥ 20dB @1GHz;
 - 4.Insulation resistance(绝缘阻抗) : ≥100MΩ;
 - 5.Dielectric withstand voltage (介质耐电压) : 250V AC;
 - 6.Mating cycles (耐久性) : ≥25 cycles;
 - 7.Engagement force(啮合力) : ≤ 60N;
 - 8.Retention force latch(保持力) : ≥110N;
 - 9.Temperature range(使用温度): -40℃~+105℃;

PART NO.:
XH8PLM2S5-NL06-X
Code: A~Z

BOM List:



7	Outer Ferrule	Copper Alloy	Ni PLATED	2 PC	2KPCS/R
6	Secondary Lock	PA66		2 PC	
5	Center Conductor	Copper Alloy	Gold PLATED	8 PCS	5KPCS/R
4	Dielectric-2	PA66		2 PC	
3	Dielectric-1	PA66		2 PC	
2	Outer Conductor	Copper Alloy	Ni PLATED	2 PC	
1	Housing	PBT		1 PC	
NO.	SPEC.	MATERIAL	FINISH (Contact)	Q'TY	NOTE

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn



DESIGN	希文	VIEW:	MODEL TYPE: Double HSD 4P Female Connector
CHECKED		UNIT: mm/in	PART NO.: XH8PLM2S5-NL06-X
APPROVED		SIZE: A4	DWG NO.: X-XH8PLM2S5-NL06-X

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/2	A0

1








2

3

4

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	2024.09.18	

Code List:

Colde							
	A	B	C	D	E	F	Z
Color/RAL-No.	Black/9005	White/9001	Blue/5005	Bordeaux/4004	Green/6002	Brown/8011	Water Blue/5021
PART NO.	XH8PLM2S5-NL06-A	XH8PLM2S5-NL06-B	XH8PLM2S5-NL06-C	XH8PLM2S5-NL06-D	XH8PLM2S5-NL06-E	XH8PLM2S5-NL06-Z	XH8PLM2S5-NL06-Z

NOTE: ALL RIGHTS RESERVED,BANNED COPY!

ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	希文	VIEW: 	MODEL TYPE: Double HSD 4P Female Connector
CHECKED		UNIT: mm/in	PART NO.: XH8PLM2S5-NL06-X
APPROVED		SIZE: A4	DWG NO.: X-XH8PLM2S5-NL06-X
			SCALE: N/A
			PAGE: 2/2
			REVISION: A0

1

2

3

4