


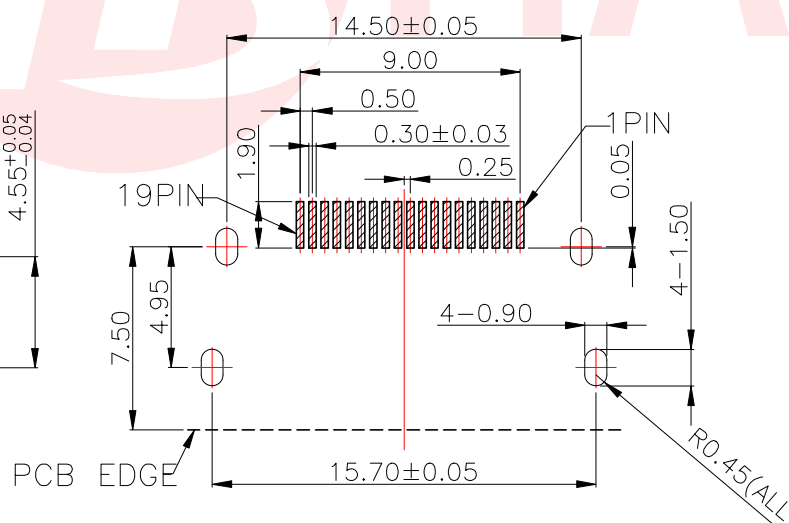


RoHS
Compliant
2011/65/EU

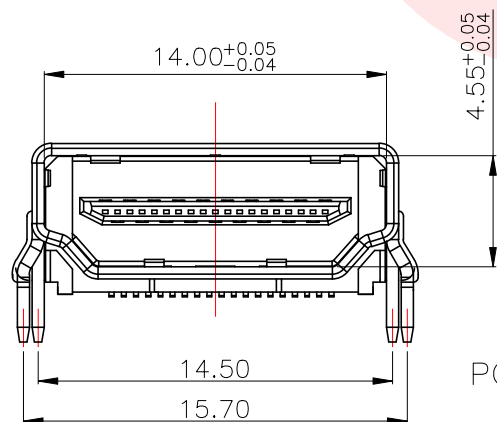

REV.	ECN NO OR DESCRIPTION	REVISED	DATE

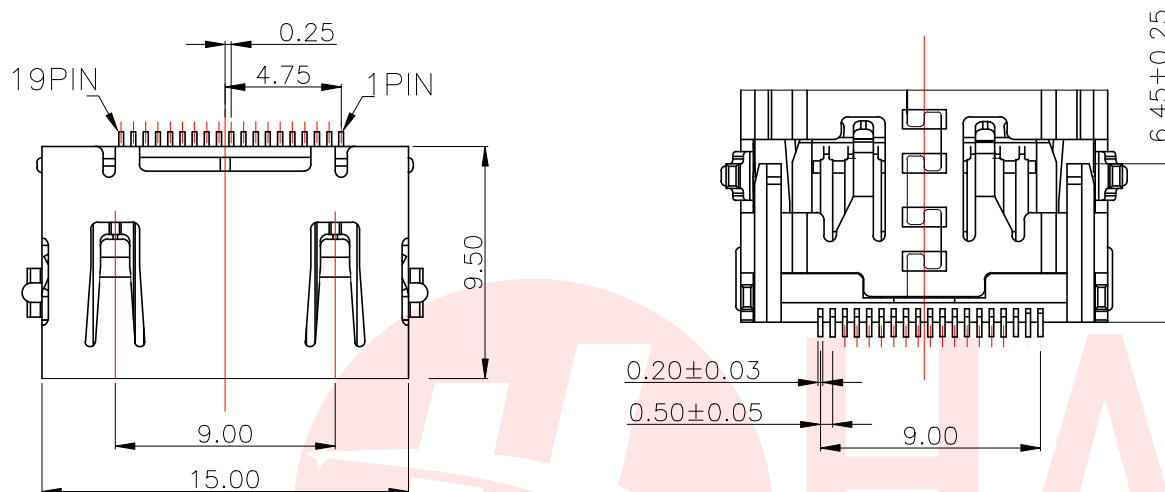

NOTES:


1.) MATERIAL:

- 1-1. HOUSING:LCP,UL 94V-0,COLOR:BLACK;
- 1-2. CONTACT:C2680R-EH T=0.20;
- 1-3. SHELL:SPCC T=0.50;

- 2-1. CONTACT: Au PLATING ON CONTACT AREA,(SEE P/N DESCRIBING) MATTE PURE SN 50U" Min. PLATING ON SOLDER TAILS,50u" MIN. Ni UNDERPLATING OVERALL;
- 2-2. SHELL: PLATING Ni 50U"MIN

3.) SPECIFICATIONS:

- 3-1. VOLTAGE RATING: 40V
- 3-2. CURRENT RATING: 0.5A
- 3-3. INSULATION RESISTANCE: 100MΩ MIN
- 3-4. CONTACT RESISTANCE: 30mΩ MAX
- 3-5. OPERATION TEMPERATURE: -20° TO +85°
- 3-6. INSERT FORCE:4.0kgf MAX
- 3-7. EXTRACT FORCE:1.0kgf~4.0kgf
- 3-8. DURABILITY: 10000 CYCLES

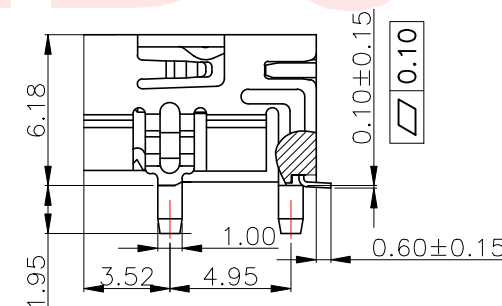

RECOMMENDED PCB LAYOUT (T:1.60mm)
TOLERANCE UNSPECIFIED ±0.10mm

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.30	X :±2°
X.X :±0.20	X.X :±1°
X.XX :±0.10	



东莞市汉博电子科技有限公司
DONGGUAN HANBO TECHNOLOGY CO., LTD

TITLE	HDMI A型 规格 9.5H			
DWN	xiong	PART NO. HDMI-232D		
CHKD	lee	SCALE:1:1	UNIT: mm	
APVD	wang	SIZE: A4	SHEET:10F 1	

CUSTOMER COPY