
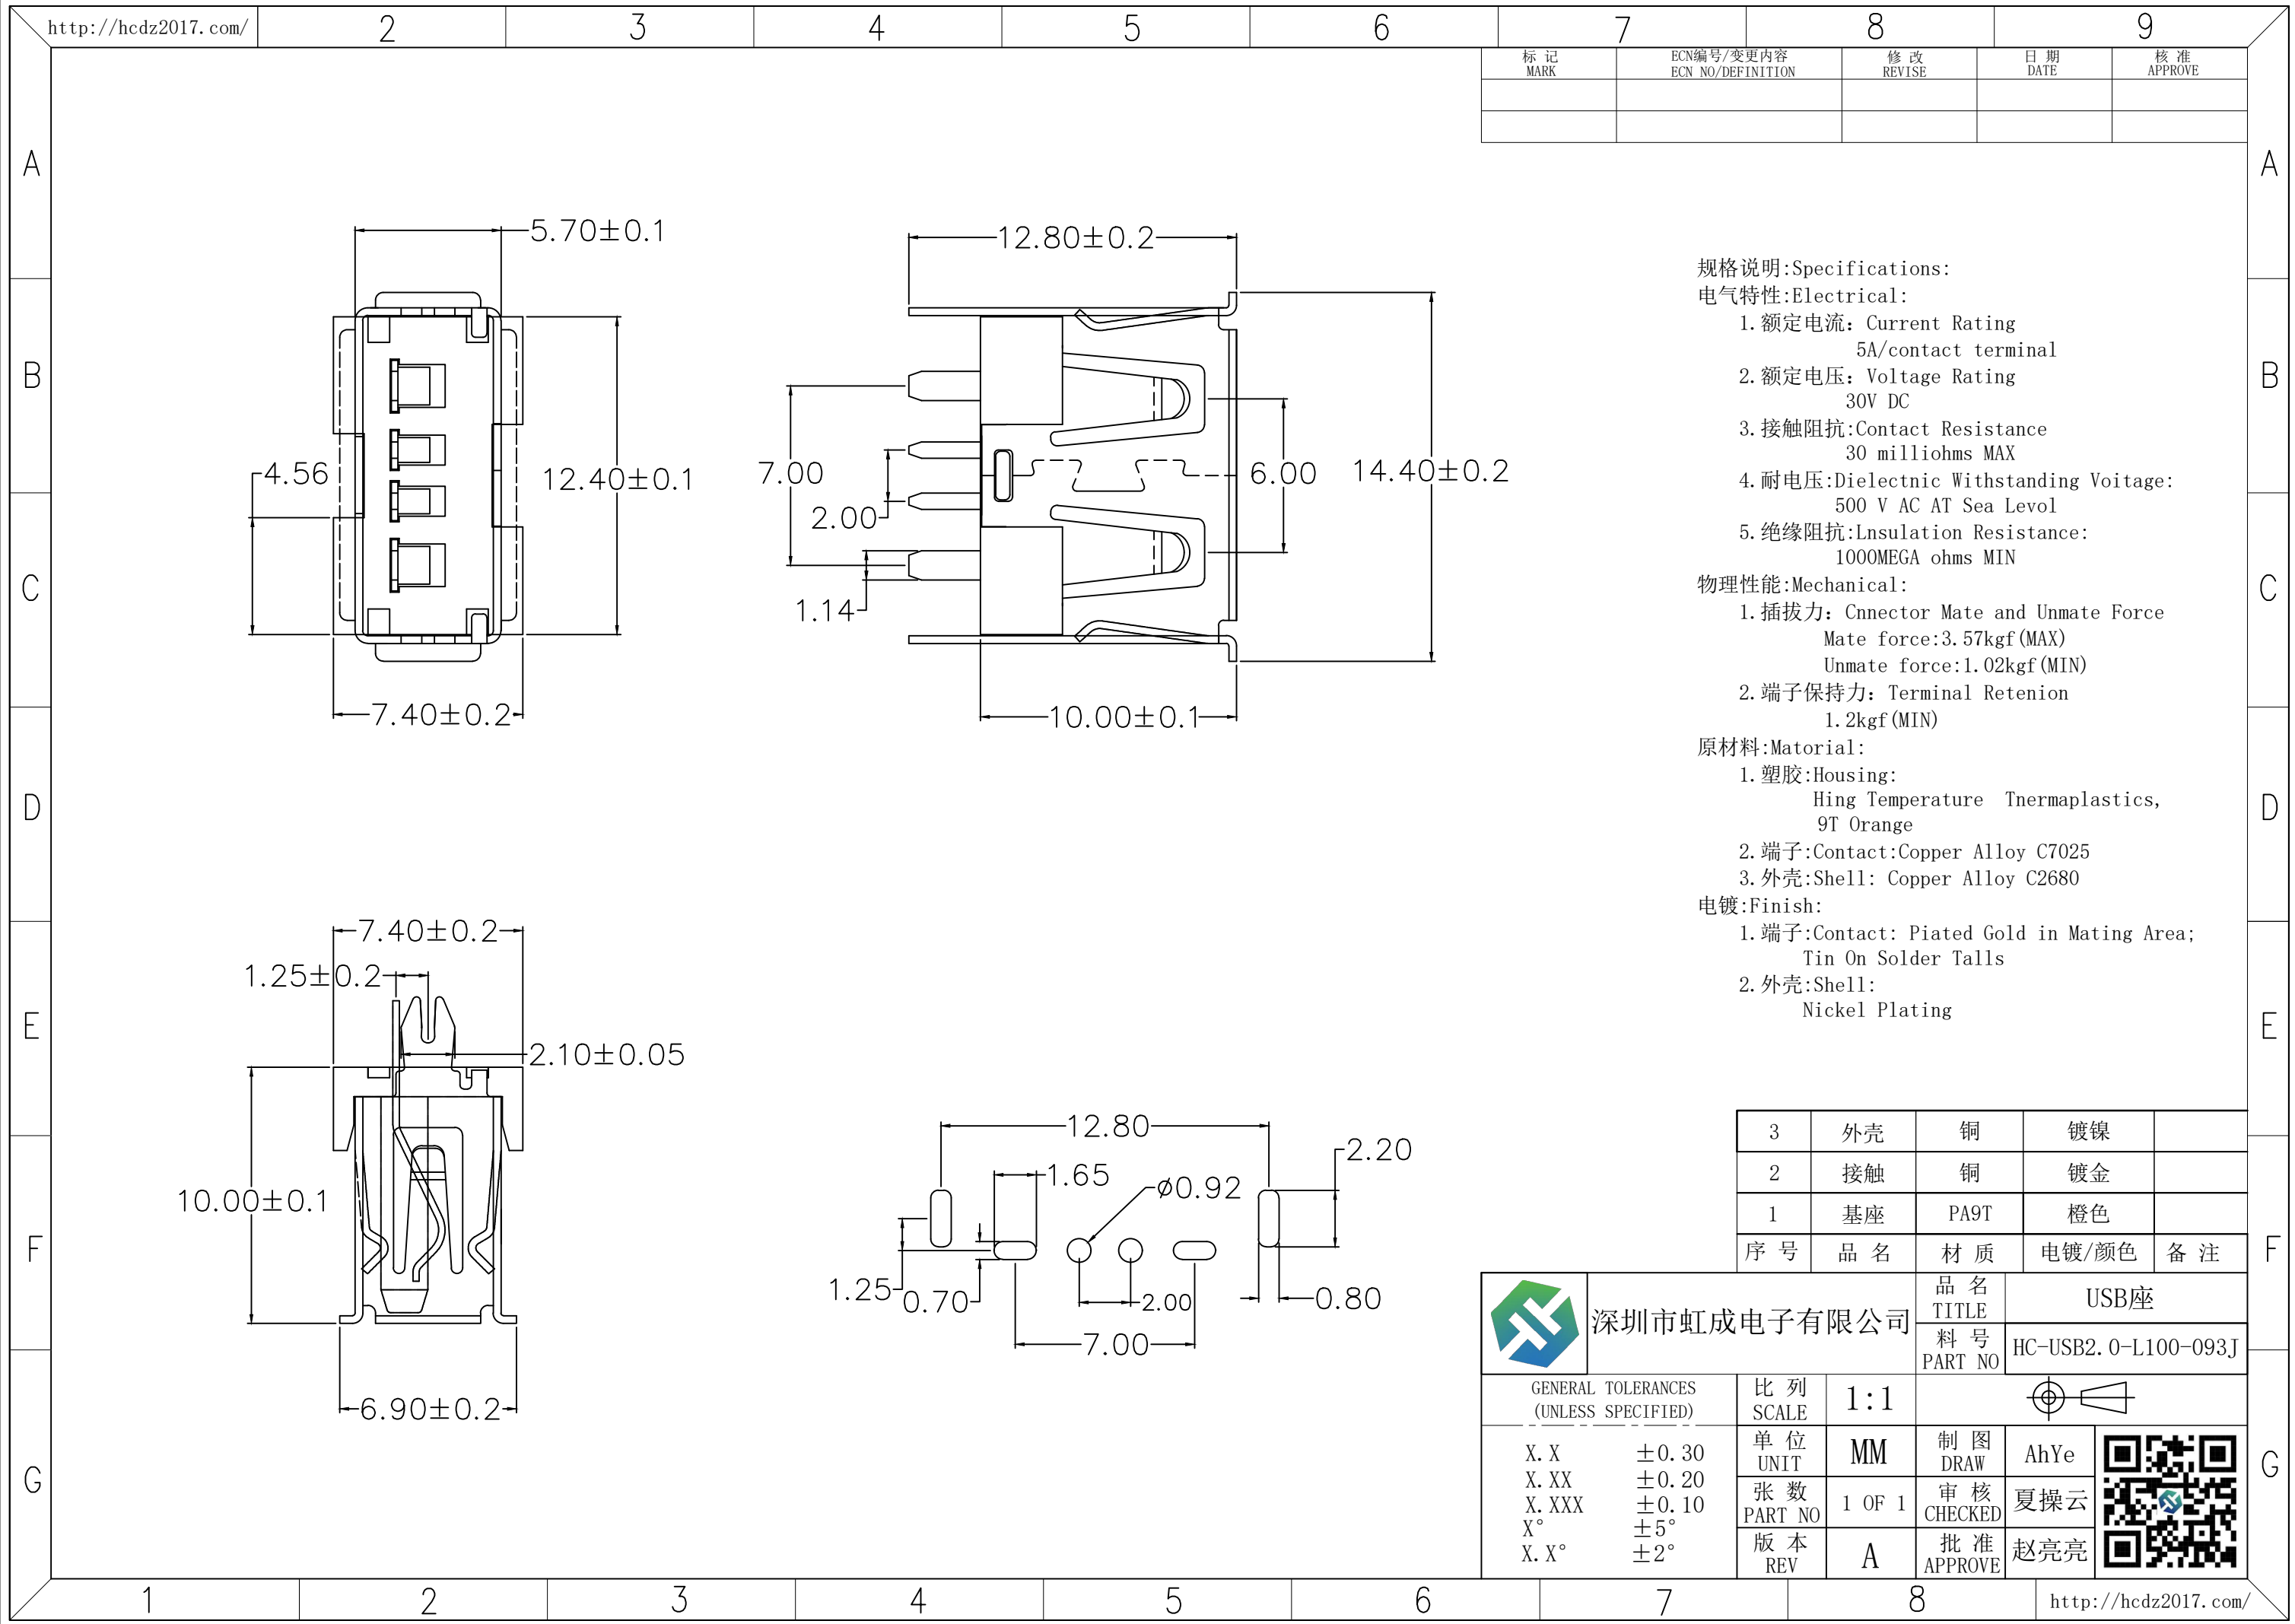




规格说明:Specifications:
电气特性:Electrical:
1. 额定电流: Current Rating
5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectric Withstanding Voitage:
500 V AC AT Sea Levol
5. 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN
物理性能:Mechanical:
1. 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)
2. 端子保持力: Terminal Retenion
1.2kgf (MIN)
原材料:Matorial:
1. 塑胶:Housing:
Hing Temperature Tnermaplastics,
9T Orange
2. 端子:Contact:Copper Alloy C7025
3. 外壳:Shell: Copper Alloy C2680
电镀:Finish:
1. 端子:Contact: Piated Gold in Mating Area;
Tin On Solder Talls
2. 外壳:Shell:
Nickel Plating

3	外壳	铜	镀镍	
2	接触	铜	镀金	
1	基座	PA9T	橙色	
序号	品名	材质	电镀/颜色	备注

 深圳市虹成电子有限公司		品名 TITLE	USB座	
		料号 PART NO	HC-USB2.0-L100-093J	
GENERAL TOLERANCES (UNLESS SPECIFIED)		比列 SCALE	1:1	
X.X	±0.30	单位 UNIT	MM	制图 DRAW
X.XX	±0.20	张数 PART NO	1 OF 1	审核 CHECKED
X.XXX	±0.10	版本 REV	A	批准 APPROVE
X°	±5°			夏操云
X.X°	±2°			赵亮亮