



TOP VIEW

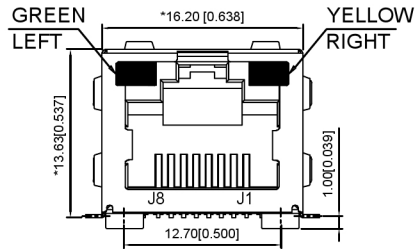

FRONT VIEW

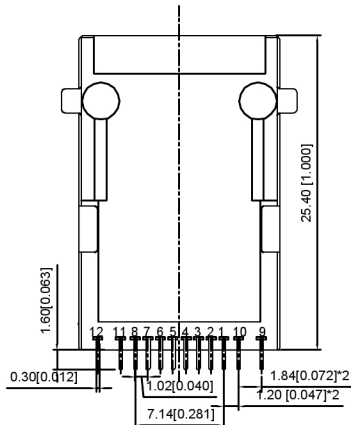


BOTTOM VIEW


XKB Connectivity

ELECTRICAL 电气:

- Turn ratio 匝数比: 1~2: J1~J2=1CT:1CT(±2%)
5~6: J3~J6=1CT:1CT(±2%)
- OCL 已占搭载量: 350uH Min. at 100KHz 100mV 8mA DC.
- Insertion Loss 插入损耗: -1.0 dB Max 1~100MHz
- Return loss 回程损耗: -20dB Min 1~10MHz
-16dB Min 10~30MHz
-12dB Min 30~60MHz
-10dB Min 60~80MHz
- Cross talk 声道串扰: -40dB Min 1~30MHz;
-35dB Min 30~60MHz;
-30dB Min 60~100MHz;
- CMR 共模抑制: -30dB Min 1~100MHz;
- Hi-Pot 耐压测试: 1500V AC & 2250V DC
6S 1mA PRI TO SEC

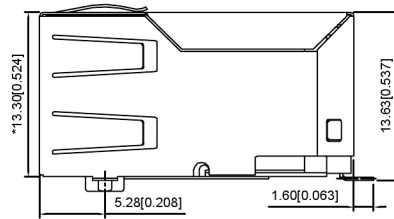


RIGHT SIDE VIEW

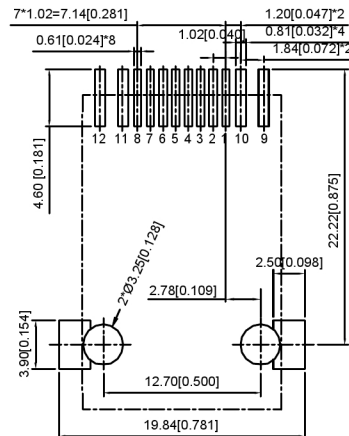RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

LED Specification

Standard	LED Color	LED Wavelength	Forward(A)	Forward(V)
	Green	56.8nm	20mA	1.85~2.45V
	Yellow	58.5nm	20mA	1.7~2.2V

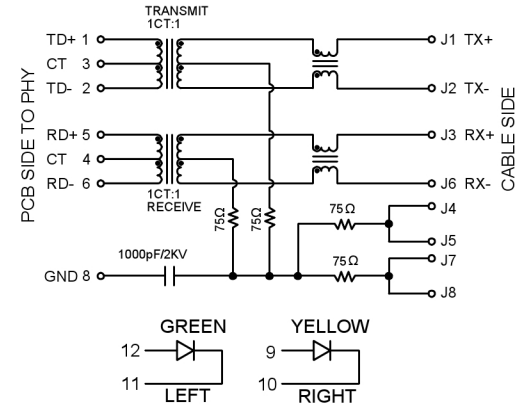

XKB Connectivity

MATERIAL 材料:

HOUSING 外壳: LCP,UL94V-0,BLACK.

TERMINALS BRACKET 端子支架: LCP,UL94V-0,BLACK.

SHIELD 保护物: C2680,T=0.20MM,NICKEL PLATING ON ALL AREA.

TERMINAL 端子: PHOSPHOR BRONZE C5210,T=0.35MM,
GOLD PLATING ON CONTACT AREA.

MECHANICAL 机械:

DURABILITY 耐用性: 750 CYCLES MIN.

MATING FORCE 配合力: 23N MAX.

OPERATING TEMPERATURE 工作温度: -40°C~+85°C.

STORAGE TEMPERATURE 储存温度: -40°C~+85°C.

ALL CRITICAL DIMENSIONS WITH "mm"

广东星坤科技股份有限公司

生 日期
MARK DESCRIPTION

文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ANGLAR	±5°			
L ≤ 4	±0.2			
4 < L ≤ 16	±0.3			
16 < L ≤ 63	±0.4			
L > 63	±0.5			

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

	DSND		SCALE: N/A	MODEL TYPE: RJ JACK		
	DWN		VIEW: 	PART NO.:		
	CHKD		UNIT: mm/in	DWG NO.:		
	APPD		SIZE: A4	X03AB093DA2GS009		
XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT	SHEET	REVISIO
					1/1	A0

XKB INDUSTRIAL PRECISION CO.,LIMITED